

48VDC recessed track (installation prior)

Recessed



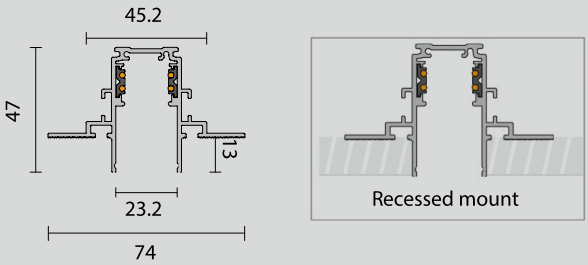

48V 16A Max.+signal connection




Model No.	Track length (mm)	Profile material	Colour
SLTR-RN110-B	1000	Aluminium extrusion	Black
SLTR-RN110-W	1000	Aluminium extrusion	White
SLTR-RN120-B	2000	Aluminium extrusion	Black
SLTR-RN120-W	2000	Aluminium extrusion	White
SLTR-RN130-B	3000	Aluminium extrusion	Black
SLTR-RN130-W	3000	Aluminium extrusion	White


NOTE: track comes with cover strip

48VDC recessed track connector (installation prior)


Recessed

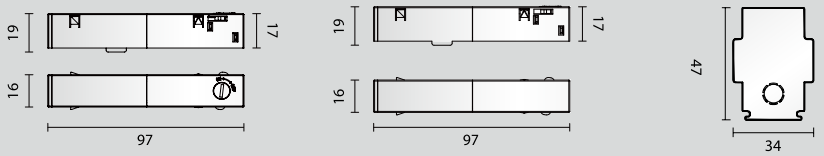

Live-end connector (left)	Live-end connector (right)	Recessed end cap	Colour
SLTR-N131L-B	SLTR-N131R-B	SLTR-RN132-B	Black
SLTR-N131L-W	SLTR-N131R-W	SLTR-RN132-W	White

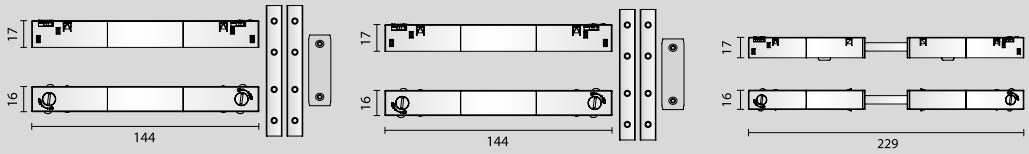

I connector - powered	I connector (insulated) - non-powered	Flexible connector	Colour
SLTR-RN133-B	SLTR-RN133A-B	SLTR-N139-B	Black
SLTR-RN133-W	SLTR-RN133A-W	SLTR-N139-W	White

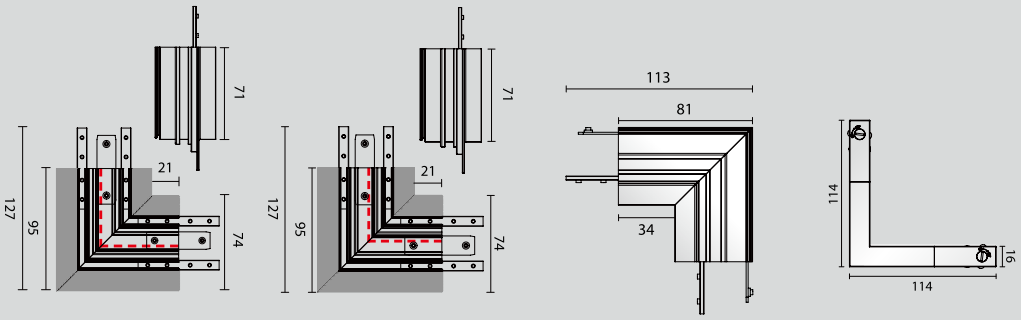

L recessed profile connector flat (left)	L recessed profile connector flat (right)	L recessed profile connector vertical (internal corner)	L connector - powered	Colour
SLTR-RN135FL-B	SLTR-RN135FR-B	SLTR-RN135S1-B	SLTR-N135-B	Black
SLTR-RN135FL-W	SLTR-RN135FR-W	SLTR-RN135S1-W	SLTR-N135-W	White