


sLED

LED CEILING LIGHT USER GUIDE

SLOY102R
SLOY100R
SLOY106R

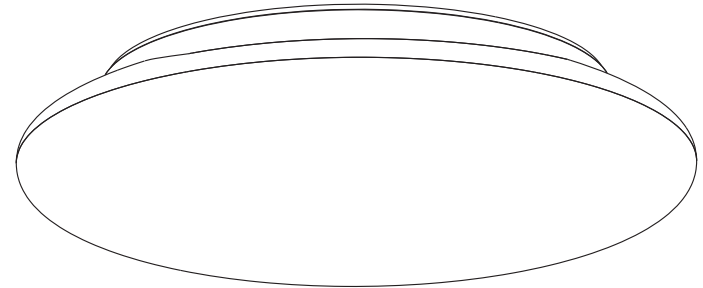

sLED

Distributed by Switch Lighting Ltd.

SAFETY INSTRUCTIONS

To ensure correct function and safety, please read and follow all instructions carefully before using the product:

1. Turn off power supply before installation or before doing any maintenance work.
2. Do not install any luminaire near the heat source.
3. IP grade please refer to product label, only IP54 can be used in damp locations.
4. Do not exceed the nominal supply voltage or amperage ratings.
5. Dimmable version could be compatible with a wide range of recommended TRIAC dimmers.
6. All wiring and installation of the light fitting must adhere to local and national wiring rules.
7. Take care not to pull any electrical wires during unpacking as this may damage the connection.
8. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
9. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
10. Please keep instructions for future reference.

Installation Procedure

WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



Turn Off
Power Supply

Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.


Step 1

Take out the light and accessory pack from box.




Step 2

Pull out the bracket anticlockwise by screw driver, take out the bracket.




Step 3

Knock the plastic anchor into ceiling, fix the bracket with screws on the ceiling.

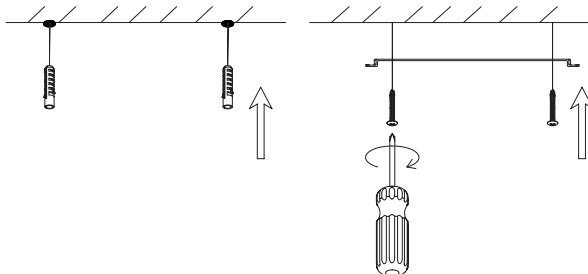

Step 3-1



(Model dependent):
Choose the CCT by slide switch before installation.

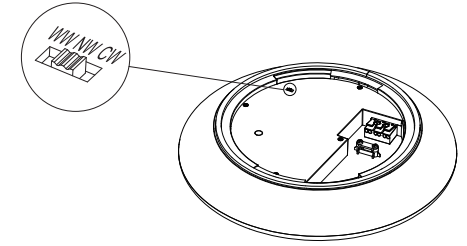

Step 4


Wire "L""N" to terminal block.

(A) wiring diagram only for NON-emergency function light.
(B) wiring diagram only for Emergency function light.

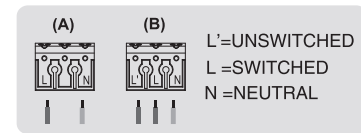



Step 5

Push the lamp upward and rotate it into bracket. Rotate the lamp clockwise until it is firmly fixed.

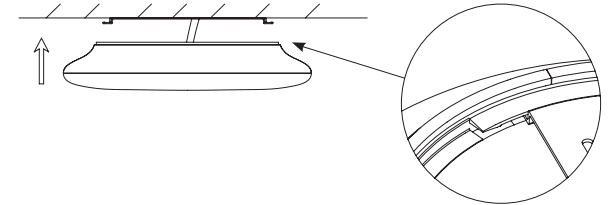

Step 6

Switch on

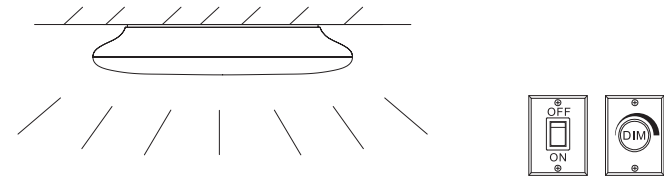

Color changeable (controlled by Slide Switch in lamp) and dimmable

Please select light color before mounting to ceiling or wall, see STEP 3-1.