





Gold inner Textured White AW

Bronze inner Textured White DW

Copper inner Textured White CW








Tunable White

PURE







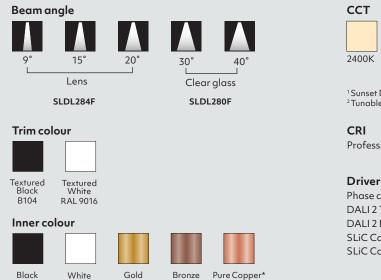


*Our copper variant is true copper and may contain small natural flaws. Over time, it will develop verdigris, darkening in colour to a variety of rich tones. This process will be slower in areas where the fitting is not exposed to moisture.

Product information

Options

Example: White, prismatic, 40°, 3000K, CRI 90, phase cut driver Contact Switch Lighting for data of other variants

Driver (mA)	Power (W)	Delivered Iumens (Im)	Insulation coverable NZ AU UK/EU			
100	4.3	310	IC-F	IC-4	\checkmark	
150	6.4	440	IC-F	IC-4	\checkmark	
180	7.7	510	IC-F	IC-4	\checkmark	
220	9.4	600	CA135	CA90	\checkmark	
260	11.1	680	[Do not cove	r	



¹ Sunset Dimming is available in 30° and 40° in Professional series. ² Tunable White is available in 20°, 30° and 40° in Art series.

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

Driver included – to be specified

Phase cut Dimming DALI 2 Tunable White DALI 2 Dimming SLiC Casambi Tunable White SLiC Casambi Dimming



* Specification is for ceiling material ≤ 13mm with a phase cut driver. Required clearance to install driver through Ø57 cut-out.

how to specify ZELA décor Fixed 1

Please confirm model option availability from our website. Not every combination is compatible.

e.g. code = <mark>SLDL280F</mark>-<mark>4030P</mark>-<mark>DWD15</mark>

Model	- Beam	сст	CRI	- [Colour - Inner / Trim	Driver]-[Market
SLDL284F = Lens	09 = 9°	24 = 2400K	P = 90-94	1 [AW = Gold / White	Phase cut Dimming	DALI 2 Dimming	1 [= NZ
	15 = 15°	27 = 2700K	A = 95-98		BW = Black / White	D08 = 100mA(4.3W)	D02 = 180mA (8.3W)		1 = Aust
	20 = 20°	30 = 3000K			CW = Copper / White	D09 = 150mA(6.4W)	D03 = 230mA (10.1W)		2 = UK
		40 = 4000K			DW = Bronze / White	D15 = 180mA (7.7W)	D04 = 260mA (11.9W)		3 = EU
SLDL280F = Clear glass	30 = 30°	SD = Sunset Dimming			WW = White / White	D10 = 220mA (9.4W)	SLiC Casambi Tunable White		
	<mark>40</mark> = 40°	S2 = Tunable White			AB = Gold / Black	D11 = 260mA (11.1W)	D52 = 180mA (8.2W)		
					BB = Black / Black	DALI 2 Tunable White	SLiC Casambi Dimming		
					DB = Bronze / Black	D42 = 180mA (8.3W)	D57 = 180mA (7.7W)		
					CB = Copper / Black	D43 = 230mA (10.1W)	Check online for other		
					WB = White / Black	D44 = 260mA (11.9W)	driver options.		

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.













