





SL112T ULG clear glass Beam 20° 40° 60°

Task | General lighting



SL111T Prismatic diffuser Beam 20° 40° 60°

General | Task lighting



SL113T Opaque diffuser Beam 90°


Wide angle lighting






D-LIGHTZTilt

- + wide range of beam angles with a 26° tilt
- 🕂 fully adjustable 360° gimbal
- + suitable for indoor use and exterior under soffits
- + IP65 front
- + perfect for retrofit to replace 50W halogen
- + contant current

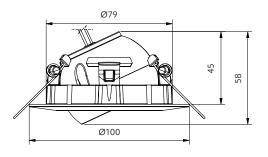

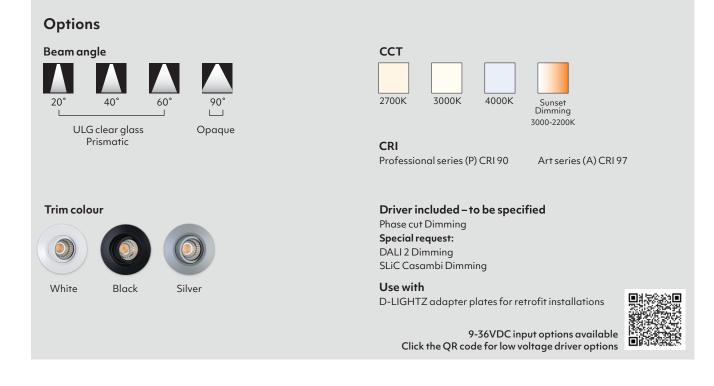

Product information

Example: White, prismatic, 40°, 3000K, CRI 90, phase cut driver Contact Switch Lighting for data of other variants

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable NZ AU UK/EU					
150	6.8	550	IC-F	IC-4	\checkmark			
220	9.2	800	IC-F	IC-4	\checkmark			
300	13.2	1000	CA135	Do not cover	\checkmark			



*Specification is for ceiling material ≤ 13mm with a phase cut driver.

how to specify D-LIGHTZ Tilt

a = c = c = C = 111T = 40 = 70 D W

Please confirm model option availability from our website. Not every combination is compatible.

e.g. code = <u>SLIIII-40-50-P-W</u>	_	L _	7		1		-		7		7	
Model	-	Beam	-	ССТ	-	CRI	-	Trim Colour	-	Driver – Phase cut*	-	Market
SL112T = ULG clear glass		20 = 20°		27 = 2700K		P = 90		W = White		D09 = 150mA (6.8W)	7	= NZ
SL111T = Prismatic		<mark>40</mark> = 40°		30 = 3000K		A = 97		B = Black		= 220mA (9.2W)		1 = Aust
		60 = 60°		40 = 4000K				S = Silver		D12 = 300mA (13.2W)		2 = UK
				SD = Sunset Dimming								3 = EU
SL113T = Opaque		90 = 90°		_						*Check online for driver options.		

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.











