

## Installation Instructions – PM196

## ZELA Surface Mounted Luminaire

### Dimmer compatibility:

All Switch Lighting dimmers, PDL universal and trailing edge, Clipsal universal and trailing edge, HPM trailing edge, Legrand EM400A3P. Contact Switch Lighting for other dimmers.

### Type:

Class II luminaire, 200-240V, 6.4W (D45) / 11.1W (D46).



Class II

### Suitable installations:

Indoor only (IP20).

### Looping in:

Suitable for looping in loads of 200W max including looped earth connection.

### Replaceability:

The light source within this luminaire shall only be replaced by the manufacturer or his authorised agent.




### Warranty:

**Luminaire:** 5 years **Driver:** 5 years


Proof of purchase is required. See website for full warranty conditions.

## Installation:

- 1 Pass cable through back plate. Attach back plate to ceiling with two plasterboard anchors or screws (not supplied).

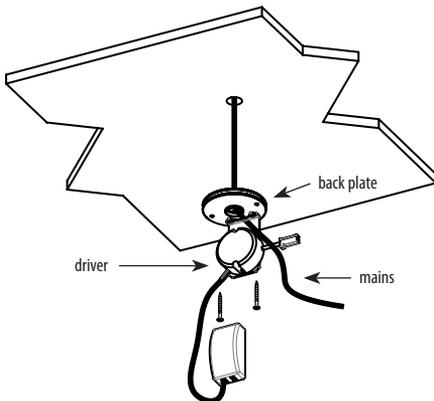

- 2 Terminate power to junction box. Connect light to driver.

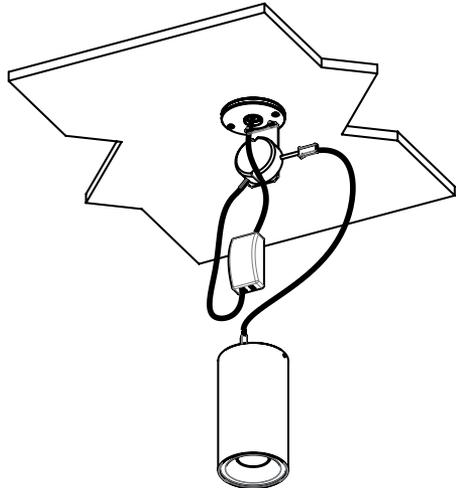

- 3 Fit cables and junction box inside housing. Tighten retaining grub screws.

