

Installation Instructions – PM196

ZELA Surface Mounted Luminaire

Dimmer compatibility:

All Switch Lighting dimmers, PDL universal and trailing edge, Clipsal universal and trailing edge, HPM trailing edge, Legrand EM400A3P. Contact Switch Lighting for other dimmers.

Type:

Class II luminaire, 200-240V, 6.4W (D45) / 11.1W (D46).



Class II

Looping in:

Suitable for looping in loads of 200W max including looped earth connection.

Replaceability:

The light source within this luminaire shall only be replaced by the manufacturer or his authorised agent.



Suitable installations:

Indoor only (IP20).


Warranty:

Luminaire: 5 years **Driver:** 5 years


Proof of purchase is required. See website for full warranty conditions.

Installation:

- 1 Pass cable through ceiling fixture. Attach ceiling fixture to ceiling with two anchors or screws (not supplied).

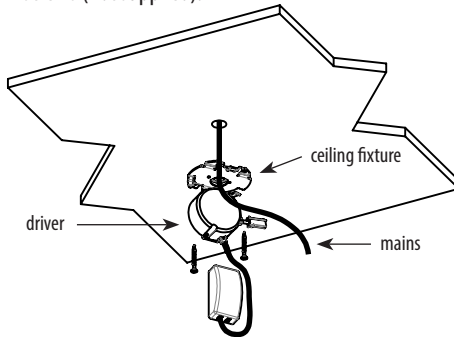

- 2 Terminate power to black junction box. Plug light to driver. Clip tether to tab in the ceiling fixture.

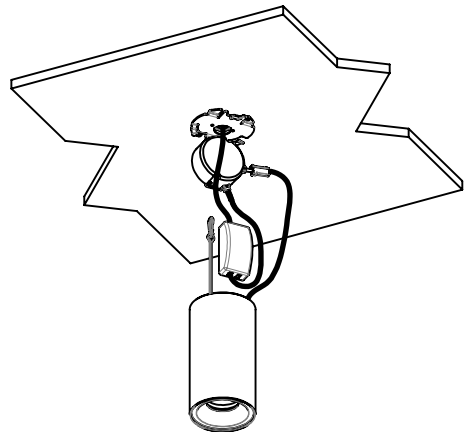

- 3 Fit cables and junction box inside housing. Push housing over ceiling fixture and twist clockwise to the stop.

