

# Feature-LIGHTZ



SLDL614T  
White




SLDL614T  
Black



# Feature-LIGHTZ

- + create a striking focal point to draw attention to design & decor
- + 2.2W
- + dimmable
- + use indoors for reading / features
- + IP44
- + constant current (Max 700mA)

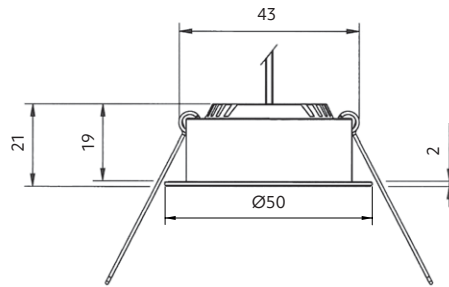

## Options

### Beam angle



30°

### CCT



2700K



3000K



4000K

### CRI

Professional series (P) CRI 90

### Trim colour



White



Black

### Power supply – constant current

Ordered separately

**230V circuit (@700mA) only 2700K, 3000K, 4000K**

1-3 lights TE dimmable SE-9-350-700

3-6 lights TE dimmable SE-15-350-700

3-13 lights dimmable SE-40-300-1050\* (5-19 R, 3-12 G)

### 12 or 24VDC circuit – only 2700K, 3000K, 4000K

1-3 lights LDD-700LW power supply @ 12VDC

1-6 lights LDD-700LW power supply @ 24VDC

Contact Switch Lighting for Casambi Smart Control options.



Scan to view driver options

## Product information

**Table is based on: 3000K**

Contact Switch Lighting for data of other variants

Luminaire power (W)	Forward voltage (V <sub>f</sub> )	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
2.2	3.2	175	IC-F	IC-4	✓



Size 50x19mm



Cut-out Ø43mm



Hole depth >30mm



IP44



Tilt Angle 35°

## How to specify Feature-LIGHTZ

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **S**LDL614**T**-**30**-**30**-**P**-**W**

Model	Beam	CCT	CRI	Trim Colour	Market
S <b>LDL614</b> T	<b>30</b> = 30°	27 = 2700K <b>30</b> = 3000K 40 = 4000K	<b>P</b> = 90	<b>W</b> = White <b>B</b> = Black	<b>1</b> = NZ 1 = Aust 2 = UK 3 = EU

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for specifications, lux levels, SDoCs, ies files and installation instructions.



**Warranty**  
7yr Luminaire  
5yr Driver

**L70** (30,000 h)



**PURE COLOUR**  
HIGH CRI DOWNLIGHTS

