

## Installation Instructions – PM225

## Cirro Ceiling Washer

### Approved insulation:

Pink Batts, Bradford Gold, InsulPro Polyester insulation, Ecofleece, Autex Greenstuf, Earthwool, Premier insulation.  
Contact Switch Lighting for other insulation information.

### Caution:

Macerated paper (Insul-fluf) and other loose fill insulation as defined in NZS 4246 is not permitted to abut or cover this luminaire and driver or be used anywhere near this luminaire.

Always turn power off when connecting or disconnecting luminaires.

### Required clearance: Standard

Required clearance from structural members and building elements:

**SCB** = 0mm    **HCB** = 0mm

### Dimmer compatibility:

Dependent on product type. Casambi, DALI or the following phase-cut dimmers: PDL or Clipsal universal and trailing edge, HPM trailing edge, Legrand EM400A3P.


Contact Switch Lighting for other dimmers.

### Warranty:

**Luminaire:** 7 years    **Driver:** 5 years

Proof of purchase is required.

See website for full warranty conditions.

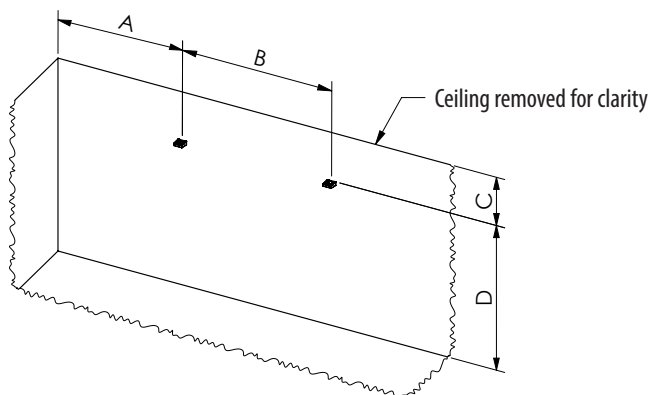

Recommended setout dimensions


Dimension	Measurement	Description
A	1.5-1.8m	Distance from wall
B	1.5-2m	Pitching/spacing
C	0.6m	Minimum distance down from ceiling
D	1.8m	Minimum distance above floor

NB: The cut-out template is supplied on the product box lid

Please see reverse for installation guide


## Installation:

- ① Cut rectangle in wall using template on box

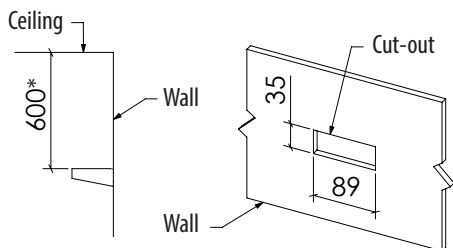


\*Recommended distance from ceiling


- ② AC connection (by registered electrician)

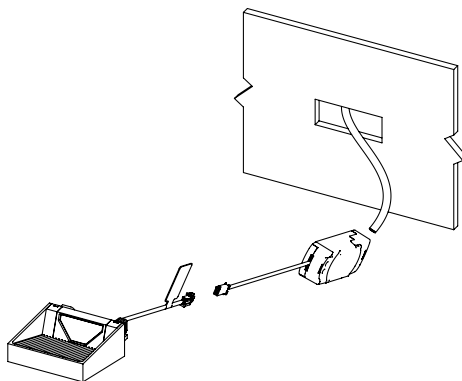


- ③ Ensure mounting tabs are vertical

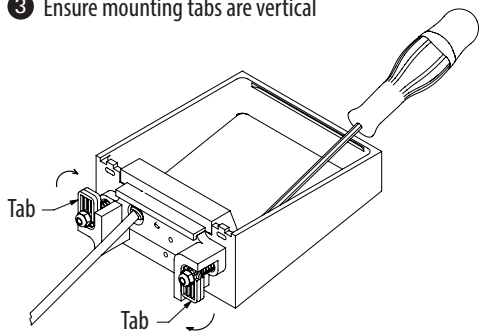


- ④ Mount light (do not over-tighten screws)  
Ensure light is level

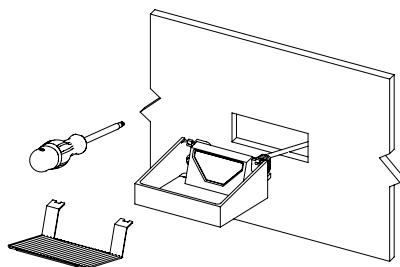

- ⑤ Clip in cover



Insert front edge of cover into house  
then snap back corners in

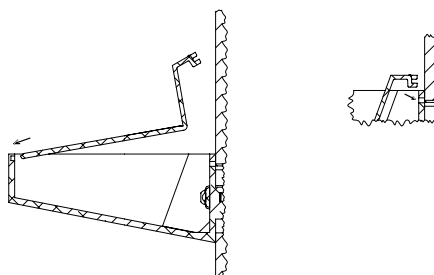

NB: The cut-out template is supplied on the product box lid