


Installation Instructions – PM256

Pendant 1 – DALI-2 Driver IE-12D 12W 180-500mA

The IE-12D DALI-2 driver may be used to add DALI control to most of the Switch Lighting range.

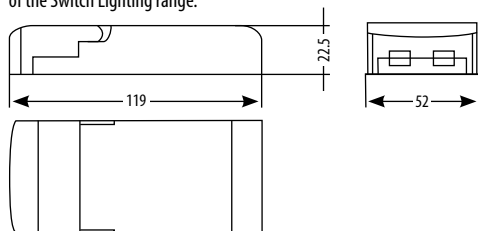

Driver specifications:

Rated AC supply: 220-240V

AC frequency: 50/60 Hz

Max input power: 12W

Max output voltage (U-out): 70V


Output ripple (<120 Hz): <3%

Dimensions (LxWxH): 119x52x22.5mm

DALI interface: DALI-2

Min hole size to install: 56mm

Insulation rating:

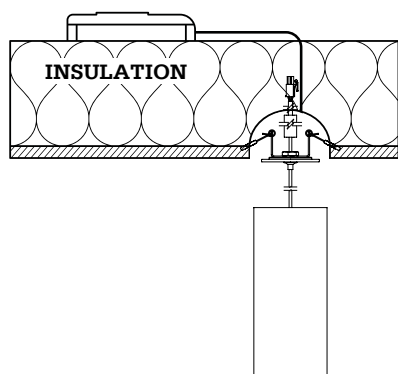

Required clearance:

Required clearance from structural members and building elements:

SCB = 0mm

HCB = 0mm