

## Installation Instructions – PM255

## Pendant Light 1

### Approved insulation:

Pink Batts, Bradford Gold, InsulPro Polyester insulation, Ecofleece, Autex Greenstuf, Earthwool, Premier insulation.  
Contact Switch Lighting for other insulation information.

### Caution:

Macerated paper (Insul-fluf) and other loose fill insulation as defined in NZS 4246 is not permitted to abut or cover this luminaire and driver or be used anywhere near this luminaire.

Always turn power off when connecting or disconnecting luminaires.

### Required clearance: Standard

Required clearance from structural members and building elements:

**SCB** = 0mm    **HCB** = 0mm


### Warranty:

**Luminaire:** 7 years    **Driver:** 5 years

Proof of purchase is required.


See website for full warranty conditions.

### Cable adjustment:



Push up to adjust cable length

Do most of cable length adjustment at rose before installation.



Push down while holding pendant to adjust length

Do final cable length adjustment at back of rose after installation.


### Dimmer compatibility:

Dependent on product type. Casambi, DALI or the following phase-cut dimmers: PDL or Clipsal universal and trailing edge, HPM trailing edge, Legrand EM400A3P.

Contact Switch Lighting for other dimmers.

### Installation:

#### 1 Cut-out

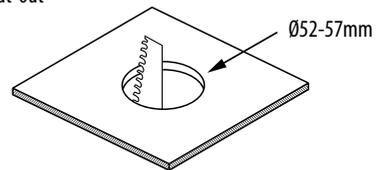

#### 2 AC connection (by registered electrician)



#### 3 Connect luminaire and install in ceiling (no insulation shown for clarity)

