

# Marker-LIGHTZ



**SLSPK**  
Spike accessory



**SLSPK-2**  
Spike 2 accessory



**SLSPK-2-EXT**  
Extender accessory  
1-3 can be used  
with Spike 2



Natural Anodised  
Aluminium



Black Anodised  
Aluminium

Friction Fit  
SL231

Spring Mount  
SL241



Copper




316 Stainless Steel



# Marker-LIGHTZ

- + subtle illumination creating understated ambiance
- + tiny form factor
- + use outdoors on decks / driveways / retaining walls
- + improves safety while navigating after dark
- + constant voltage (12VDC)
- + IP67

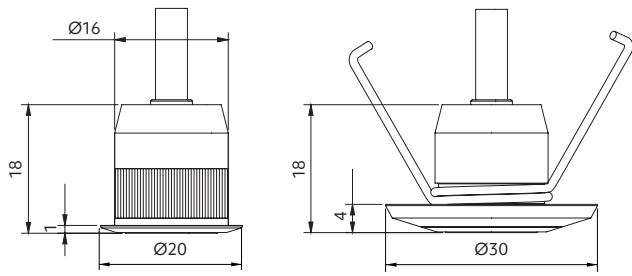

## Options

### Beam angle



Wide

### Colour



Red



Green



Blue



White

### Trim colour



Natural Anodised Aluminium



Black Anodised Aluminium



Copper



316 Stainless Steel

### Power supply – constant voltage

Ordered separately

Q4-12V-20W (IP20) 1-680 lights in parallel (IP20)

SLDV-12V-40W (IP67) 1-1200 lights in parallel (IP67)

Please refer online for cable size requirements (voltage drop)

### Use with

Waterproof cable connectors

### Spike



200mm for SL201

SLSPK-B Black Anodised Aluminium

SLSPK-N Natural Anodised Aluminium

SLSPK-C Copper

SLSPK-SS 316 Stainless Steel

### Spike 2

212mm for SL201

SLSPK-2-B Black Anodised Aluminium

SLSPK-2-N Natural Anodised Aluminium

SLSPK-2-C Copper

SLSPK-2-SS 316 Stainless Steel



### Extender for use with Spike 2

250mm

SLSPK-2-Ext-B Black Anodised Aluminium

SLSPK-2-Ext-N Natural Anodised Aluminium

SLSPK-2-Ext-C Copper

SLSPK-2-Ext-SS 316 Stainless Steel

## Product information

Power supply (VDC)	Luminaire power (mW)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
12	<30 (2.5mA)	<1	IC-F	IC-4	✓

### SL231 Friction fit



Size 20x18mm



Cut-out Ø16mm



Hole depth >26mm



### SL241 Spring mount



Size 30x18mm



Cut-out Ø20mm



Hole depth >26mm



## how to specify Marker-LIGHTZ

Please confirm model option availability from our website. **Note: power supply is ordered separately.**

e.g. code = **SL231-G-N**

Model	Colour	Trim Colour	Market
SL231	R = Red G = Green B = Blue W = White	N = Natural Anodised Aluminium B = Black Anodised Aluminium C = Copper SS = 316 Stainless Steel	1 = NZ 1 = Aust 2 = UK 3 = EU
SL241			

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty  
5 Years

L70 (50,000 h)

