


Mini-LIGHTZ Deep Fixed



Switch Lighting Christchurch showroom
Inception Electrical

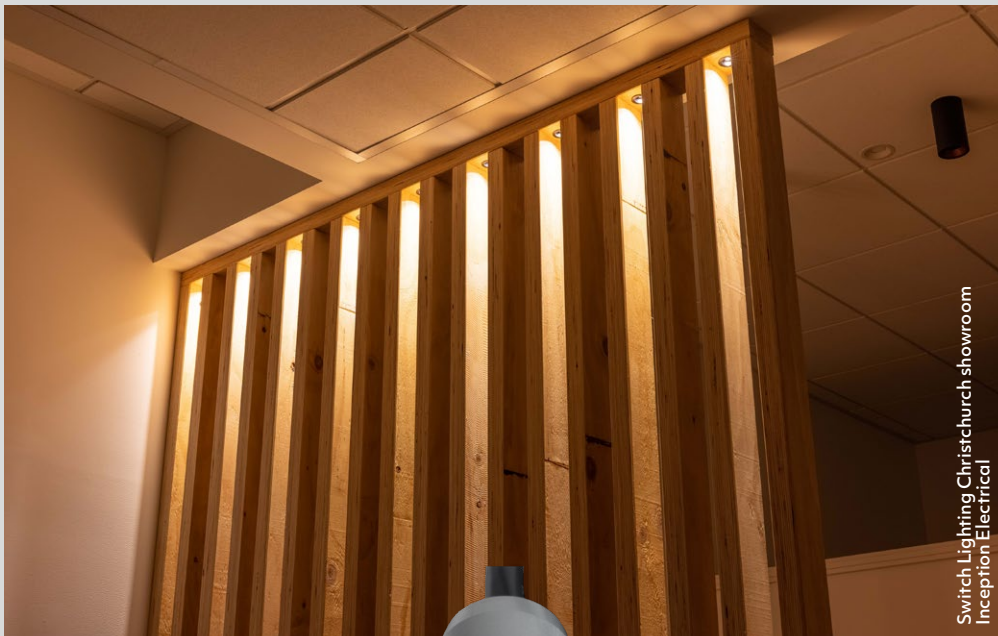

SLDL624F



Natural Anodised
Aluminium



Black Anodised
Aluminium



316 Stainless Steel




White
316 Stainless Steel





Mini-LIGHTZ Deep Fixed

- + enhance visual charm with its unobtrusive, deep recessed design
- + tiny form factor 1W/2.2W
- + suitable for accent lighting indoors, including bathrooms
- + use outdoors under soffits
- + IP67
- + constant current (Max 700mA)




Options

Beam angle



Trim colour

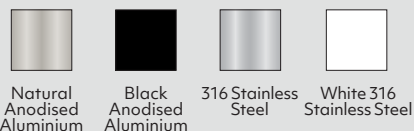

Power supply – constant current

Ordered separately

1W - 350mA

230VAC circuit (@350mA) only 2700K, 3000K, 4000K

1-4 lights	non-dimming Mini 350mA power supply
1-3 lights	TE dimmable SE-9-350-700
3-11 lights	TE dimmable SE-12-100-400
3-13 lights	TE dimmable SE-15-350-700
3-13 lights	dimmable SE-40-300-1050* (5-19 R, 3-12 G)


12 or 24VDC circuit – all types:

1-3 lights	LDD-350LW @ 12VDC
1-7 lights	LDD-350LW @ 24VDC

See driver options for coloured versions in Tips & Tricks on our website.

*1-10V, 0-10V, PWM, RX (variable resistor or rheostat)

CCT



CRI

CRI 80 (2700K/3000K/4000K)

Use with

LED protector to protect from power and wiring hazards
Waterproof cable connectors

2.1W - 700mA

230VAC circuit (@700mA) only 2700K, 3000K, 4000K

1-3 lights	TE dimmable SE-9-350-700
3-6 lights	TE dimmable SE-15-350-700
3-13 lights	TE dimmable SE-40-300-1050* (5-19 R, 3-12 G)*

12 or 24VDC circuit – only 2700K, 3000K, 4000K

1-3 lights	LDD-700LW power supply @ 12VDC
1-6 lights	LDD-700LW power supply @ 24VDC

Contact Switch Lighting for Casambi
Smart Control options.

Scan to view driver options



Product information

Example: 3000K

Contact Switch Lighting for data of other variants

Driver (mA)	Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V _f)	Insulation coverable		
				NZ	AU	UK/EU
350	1	115	3	IC-F	IC-4	✓
700	2.1	215	3	IC-F	IC-4	✓



Size
38x28mm



Cut-out
Ø32mm



Hole depth
>36mm



how to specify Mini-LIGHTZ Deep Fixed

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SDDL624F-6027C-N** (2700K, 3000K, 4000K); **SDDL624F-25-R-N** (Red, Green, Blue, Amber)

Model	Beam	CCT	Series	Trim Colour	Market
SDDL624F	25 = 25° 60 = 60°	27 = 2700K 30 = 3000K 40 = 4000K	C = Classic	N = Natural Aluminium B = Black Anodised Aluminium SS = 316 Stainless Steel W = White 316 Stainless Steel	 = NZ 1 = Aust 2 = UK 3 = EU

Model	Beam	CCT	Trim Colour	Market
SDDL624F	25 = 25° 60 = 60°	R = Red G = Green B = Blue A = Amber	N = Natural Aluminium B = Black Anodised Aluminium SS = 316 Stainless Steel W = White 316 Stainless Steel	 = NZ 1 = Aust 2 = UK 3 = EU

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

