

Mini-LIGHTZ Spring Mount



Natural Anodised Aluminium



Black Anodised Aluminium



White 316 Stainless Steel



Copper



316 Stainless Steel



Matt Black Anodised Aluminium




Matt Bronze Anodised Aluminium



Mini-LIGHTZ Spring Mount

- + accentuate and elevate the aesthetic appeal of any environment
- + tiny form factor with a powerful 1W illumination
- + suitable for accent lighting indoors, including bathrooms
- + use outdoors for garden lighting / decks / under soffits
- + ideal for fitting into plasterboard
- + constant current (Max 350mA)

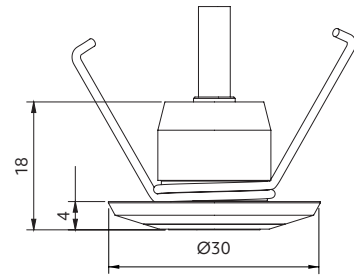

Options

Beam angle



30° 70°

2700K, 3000K, 4000K



25° 60°

Red, Green, Blue, Amber

CCT



2700K

3000K

4000K

Red

Green

Blue

Amber

CRI

CRI 80

Trim colour



Natural Anodised Aluminium



Black Anodised Aluminium



Copper



316 Stainless Steel



White 316 Stainless Steel



Matt Black Anodised Aluminium



Matt Bronze Anodised Aluminium

Power supply – constant current

Ordered separately

230VAC circuit (@350mA) only 2700K, 3000K, 4000K

- 1-4 lights non-dimming Mini 350mA power supply
- 1-3 lights TE dimmable SE-9-350-700
- 3-11 lights TE dimmable SE-12-100-400
- 3-13 lights TE dimmable SE-15-350-700
- 3-13 lights dimmable SE-40-300-1050* (5-19 R, 3-12 G)

12 or 24VDC circuit – all types:

- 1-3 lights LDD-350LW @ 12VDC
- 1-7 lights LDD-350LW @ 24VDC

Contact Switch Lighting for Casambi Smart Control options.

See driver options for coloured versions in Tips & Tricks on our website.
*1-10V, 0-10V, PWM, RX (variable resistor or rheostat)

Product information

Table is based on: 2700K

Contact Switch Lighting for data of other variants

Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V _f)	Insulation coverable		
			NZ	AU	UK/EU
1	115	3	IC-F	IC-4	✓

Product information

Table is based on: 25°

Contact Switch Lighting for data of other variants

Colour	Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V _f)	Insulation coverable		
				NZ	AU	UK/EU
Red	1	47	3.2	IC-F	IC-4	✓
Green	1	100	3.2	IC-F	IC-4	✓
Blue	1	31	3.2	IC-F	IC-4	✓
Amber	1	91	3.2	IC-F	IC-4	✓

How to specify Mini-LIGHTZ Spring Mount

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SL211-70-27-N** (2700K, 3000K, 4000K); **SL211-25-R-N** (Red, Green, Blue, Amber)

Model	Beam	CCT	Trim Colour	Market
SL211	30 = 30° 70 = 70°	27 = 2700K 30 = 3000K 40 = 4000K	N = Natural Anodised Aluminium B = Black Anodised Aluminium W = White 316 Stainless Steel SS = 316 Stainless Steel C = Copper MB = Matt Black Anodised Aluminium MZ = Matt Bronze Anodised Aluminium	1 = NZ 2 = UK 3 = EU
SL211 (colours)	25 = 25° 60 = 60°	R = Red G = Green B = Blue A = Amber		



Size 30x18mm



Cut-out Ø20mm



Hole depth >26mm



IP67

Please see www.switch-lighting.co.nz for specifications, lux levels, SDCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

