


Path Light 1



SLSPK-2-EXT
Extender accessory
1 is included
an additional 1-2
can be used

SLGL310

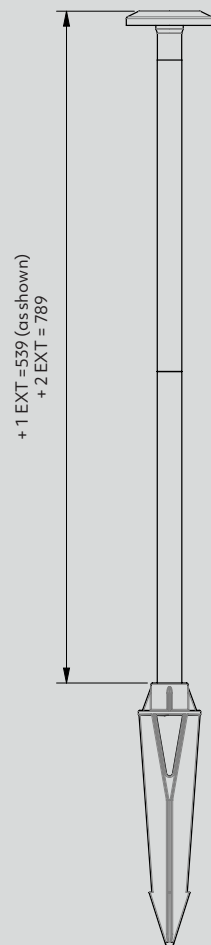

Natural Anodised
Aluminium



Black Anodised
Aluminium



Copper




316 Stainless Steel



Path Light 1

- + infuse outdoor spaces with a touch of elegance
- + stainless steel and anodised options for coastal high wear & corrosion resistance
- + extensions available
- + use outdoors for garden / path lighting
- + IP65
- + constant current (Max 700mA)

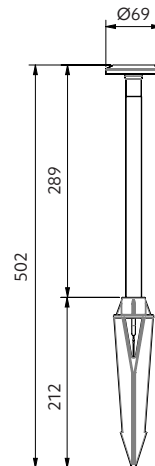

Options

Beam angle



wide

Trim colour



Natural Anodised Aluminium



Black Anodised Aluminium



316 Stainless Steel

CCT



2700K



3000K



4000K



Red



Green



Blue



Amber

Trim colour



Natural Anodised Aluminium



Black Anodised Aluminium



Copper



316 Stainless Steel

Extender

250mm

SLSPK-2-EXT-B Black Anodised Aluminium

SLSPK-2-EXT-N Natural Anodised Aluminium

SLSPK-2-EXT-C Copper

SLSPK-2-EXT-SS 316 Stainless Steel

Use with

LED protector to protect from power and wiring hazards

Waterproof cable connectors

230VAC power supply – constant current

Ordered separately

Max 350mA

1-3 lights	non-dimming Mini350mA power supply
1-3 lights	TE dimmable SE-9-350-700
3-11 lights	TE dimmable SE-12-100-400 (4-14 R, 3-10 G)
3-13 lights	TE dimmable SE-15-350-700 (4-17 R, 3-12 G)
3-13 lights	dimmmable SE-40-300-1050* (5-19 R, 3-12 G)*

12 or 24VDC circuit

See driver options for coloured versions in Tips & Tricks on our website.

*1-10V, 0-10V, PWM, RX (variable resistor or rheostat)

1-3 lights LDD-350LW @ 12V

1-7 lights LDD-350LW @ 24V

Product information

Example: 3000K

Contact Switch Lighting for data of other variants

Driver (mA)	Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V _f)
350	1	68	3
700	2.2	125	3



Size
Ø69x502mm



Spike size
Ø50x212mm



IP65

how to specify Path Light 1

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SLGL310-W230N-SPK** (2700K, 3000K, 4000K); **SLGL310-W2RN-SPK** (Red, Green, Blue, Amber)

Model	Beam	CCT	Trim Colour
SLGL310	W2 = 115°	27 = 2700K 30 = 3000K 40 = 4000K	N = Natural Anodised Aluminium B = Black Anodised Aluminium C = Copper SS = 316 Stainless Steel
Model	Beam	CCT	Trim Colour
SLGL310	W2 = 115°	R = Red G = Green B = Blue A = Amber	N = Natural Anodised Aluminium B = Black Anodised Aluminium C = Copper SS = 316 Stainless Steel

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

PURE COLOUR
HIGH CRI DOWNLIGHTS

CONSTANT
CURRENT

