


# Path Light 1



**SLSPK-2-EXT**  
Extender accessory  
1 is included  
an additional 1-2  
can be used

**SLGL310**

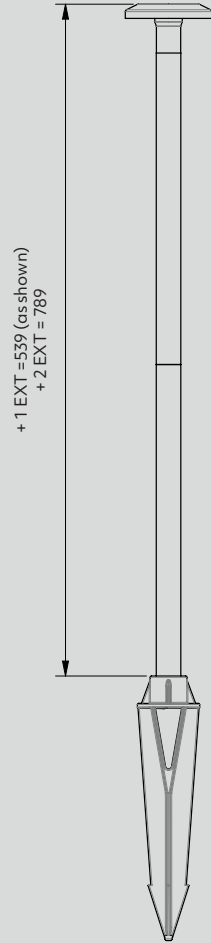

Natural Anodised  
Aluminium



Black Anodised  
Aluminium



Copper




316 Stainless Steel



# Path Light 1

- + infuse outdoor spaces with a touch of elegance
- + stainless steel and anodised options for coastal high wear & corrosion resistance
- + extensions available
- + use outdoors for garden / path lighting
- + IP65
- + constant current (Max 700mA)

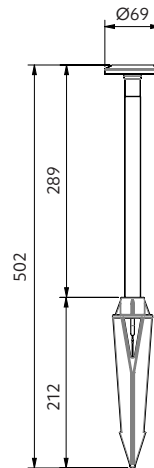

## Options

### Beam angle



wide

### Trim colour



Natural Anodised Aluminium



Black Anodised Aluminium



Copper



316 Stainless Steel

### CCT



2700K



3000K



4000K



Red



Green



Blue



Amber

### Extender

250mm

SLSPK-2-EXT-B Black Anodised Aluminium

SLSPK-2-EXT-N Natural Anodised Aluminium

SLSPK-2-EXT-C Copper

SLSPK-2-EXT-SS 316 Stainless Steel

### Use with

LED protector to protect from power and wiring hazards

Waterproof cable connectors

1-3 lights LDD-350LW @ 12VDC

1-7 lights LDD-350LW @ 24VDC

### 230VAC power supply – constant current

Ordered separately

#### Max 700mA

1-3 lights non-dimming Mini350mA power supply

1-3 lights TE dimmable SE-9-350-700

3-11 lights TE dimmable SE-12-100-400 (4-14 R, 3-10 G)

3-13 lights TE dimmable SE-15-350-700 (4-17 R, 3-12 G)

3-13 lights dimmable SE-40-300-1050\* (5-19 R, 3-12 G)\*

#### 12 or 24VDC circuit

See driver options for coloured versions in Tips & Tricks on our website.

\*1-10V, 0-10V, PWM, RX (variable resistor or rheostat)

## Product information

Table is based on: 3000K

Contact Switch Lighting for data of other variants

Driver (mA)	Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V <sub>f</sub> )
350	1	68	3
700	2.2	125	3



Size  
Ø69x502mm



Spike size  
Ø50x212mm



IP65

## How to specify Path Light 1

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SLGL310-W230N-SPK** (2700K, 3000K, 4000K); **SLGL310-W2RN-SPK** (Red, Green, Blue, Amber)

Model	Beam	CCT	Trim Colour
SLGL310	W2 = 115°	27 = 2700K 30 = 3000K 40 = 4000K	N = Natural Anodised Aluminium B = Black Anodised Aluminium C = Copper SS = 316 Stainless Steel
SLGL310	W2 = 115°	R = Red G = Green B = Blue A = Amber	N = Natural Anodised Aluminium B = Black Anodised Aluminium C = Copper SS = 316 Stainless Steel

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty  
5 Years

L70 (60,000 h)

PURE COLOUR  
HIGH CRI DOWNLIGHTS

CONSTANT CURRENT  
CC

