

PILLAR Light 2



Corner cut
SLBL120F




Straight cut
SLBL121F

NEW!

PILLAR Light 2

- + garden / path / driveway lighting
- + solid untreated hardwood
- + easy installation
- + low maintenance
- + IP67

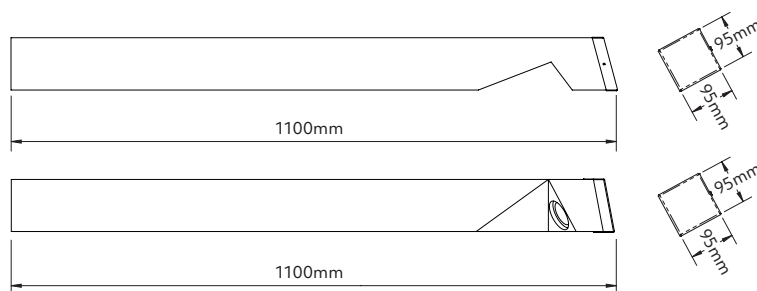

Beam control options

Beam angle



wide

Other options

Trim colour



Copper

Power supply

SL900 M-LIGHTZ – constant current
white | natural | black - 500mA dimmable.
SS | stainless black | copper - 350mA non-dimming.

Light colour options

CCT



2700K



3000K



4000K

CRI

CRI 90 (2700K/3000K/4000K)

Use with

LED protector to protect from power and wiring hazards
Waterproof cable connectors

SL910 M-LIGHTZ – constant voltage

requires a power supply with 12 or 24VDC output.

Ordered separately.

Q4-12V-20W (IP20) 1-3 lights in parallel

SLDV-12V-40W (IP67) 1-6 lights in parallel

Please refer online for cable size requirements (voltage drop)

Product information

(example: 3000K)

System power (W)	Luminaire power (W)	Forward voltage (V)	Delivered lumens (lm)	Insulation coverable		
				NZ	AU	UK/EU
4.4	3.5	9.5	290	IC-F	IC-4	✓
N/A	3.6	11-30	270	IC-F	IC-4	✓



Size
1100x95x95mm



IP67

how to specify PILLAR Light 2

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SLBL120F-W127-C**

Model	Beam	CCT	Trim Colour	Market
SLBL120F = corner cut SLBL121F = straight cut	W1 = wide angle	27 = 2700K 30 = 3000K 40 = 4000K R = Red G = Green B = Blue A = Amber	C = Copper	■ = NZ 1 = Aust 2 = UK 3 = EU

This product is made from natural timber. As such it may have tight knots, check marks or other slight imperfections.

Our copper variant is true copper and may contain small natural flaws. Over time, it will develop a patina, darkening in colour to a variety of rich tones. This process will be slower in areas where the fitting is not exposed to moisture.

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

PURE COLOUR
HIGH CRI DOWNLIGHTS

