
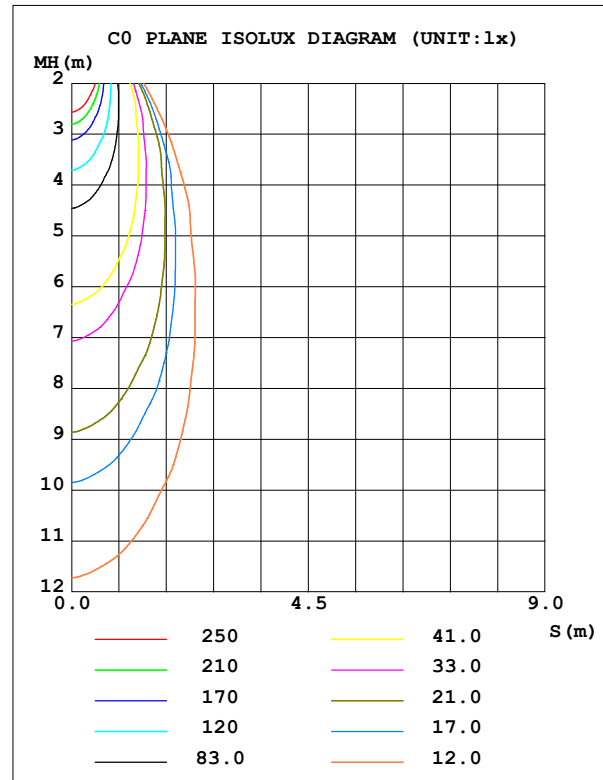


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 54.66 lm/W
MODEL		I _{max} (cd)	1651	S/MH (C0/180)		0.57
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)		0.52
RATED VOLTAGE (V)		TOTAL FLUX (lm)	623.14	η UP,DN (C0-180)		0.0,49.9
NOMINAL FLUX (lm)	623.139	CIE CLASS	DIRECT	η UP,DN (C180-360)		0.0,50.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)		η down (%)	100.0	CIBSE SHR MAX		0.55

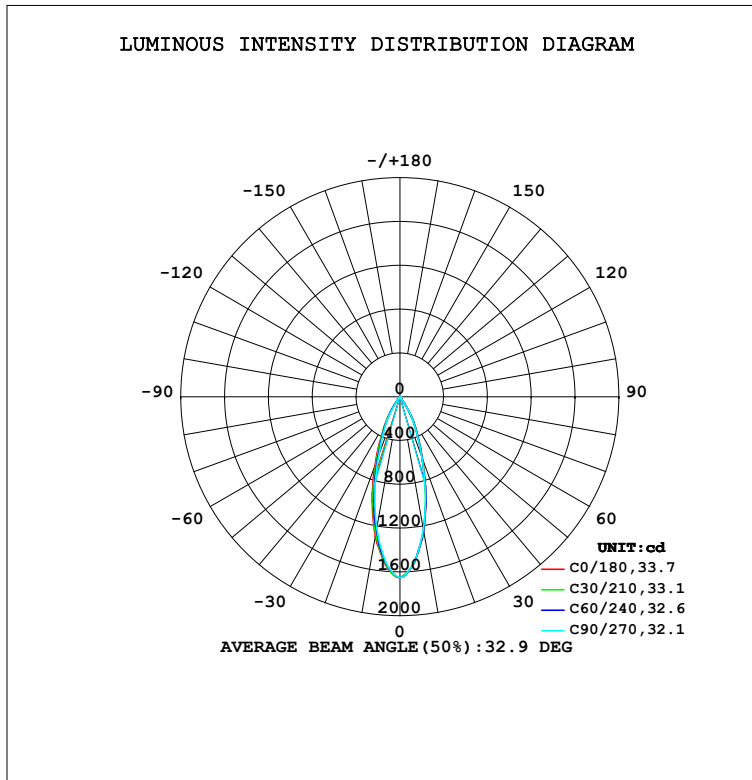

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1236	1248	1232	1269	1296	1257	1225	1227	0- 10	136.1	136.1	21.8,21.8
20	601.6	591.0	582.8	620.5	673.5	619.5	571.9	573.9	10- 20	251.5	387.7	62.2,62.2
30	216.2	216.5	212.7	226.9	246.9	225.9	213.2	209.6	20- 30	174.9	562.6	90.3,90.3
40	10.60	11.49	12.99	13.39	15.50	11.72	11.50	10.00	30- 40	54.65	617.2	99,99
50	2.444	2.683	3.306	2.820	2.809	2.334	2.737	2.198	40- 50	4.098	621.3	99.7,99.7
60	0.7693	0.7825	0.8555	0.7694	0.8546	0.5957	0.6664	0.6422	50- 60	1.317	622.6	99.9,99.9
70	0.2329	0.2312	0.1993	0.1942	0.1979	0.1840	0.1951	0.2139	60- 70	0.4083	623.0	100,100
80	0.0392	0.0323	0.0290	0.0348	0.0297	0.0330	0.0370	0.0312	70- 80	0.0894	623.1	100,100
90	0	0	0	0	0.0007	0	0	0	80- 90	0.0156	623.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG

C Interval: 30.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:Jason

Test Date:22 July 2020

 γ Range: 0 - 90DEG

 γ Interval: 1.0DEG

Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401


Humidity:65.0%

Test Distance:3.160m [K=1.0000]

Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

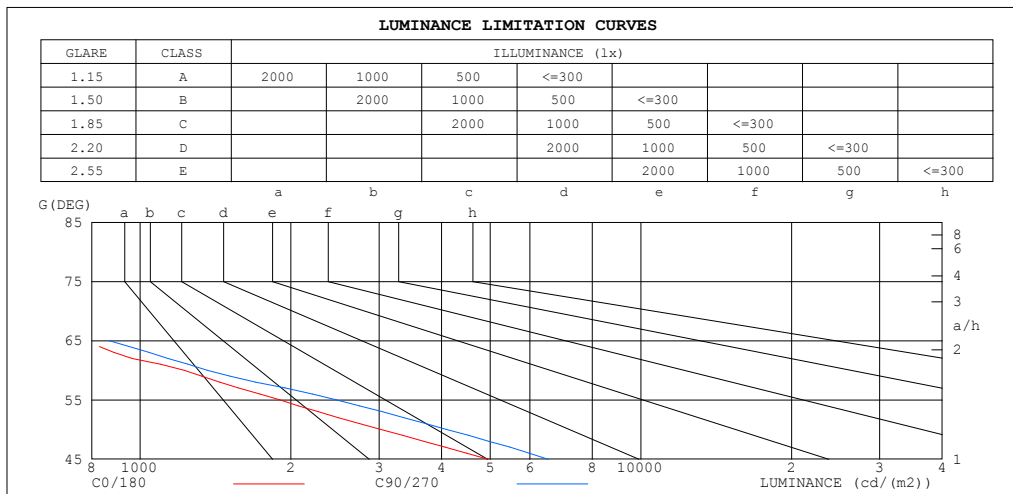

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	180	79
80	180	133
75	185	147
70	542	464
65	770	865
60	1225	1363
55	1900	2461
50	3027	4096
45	4957	6529


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:22 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

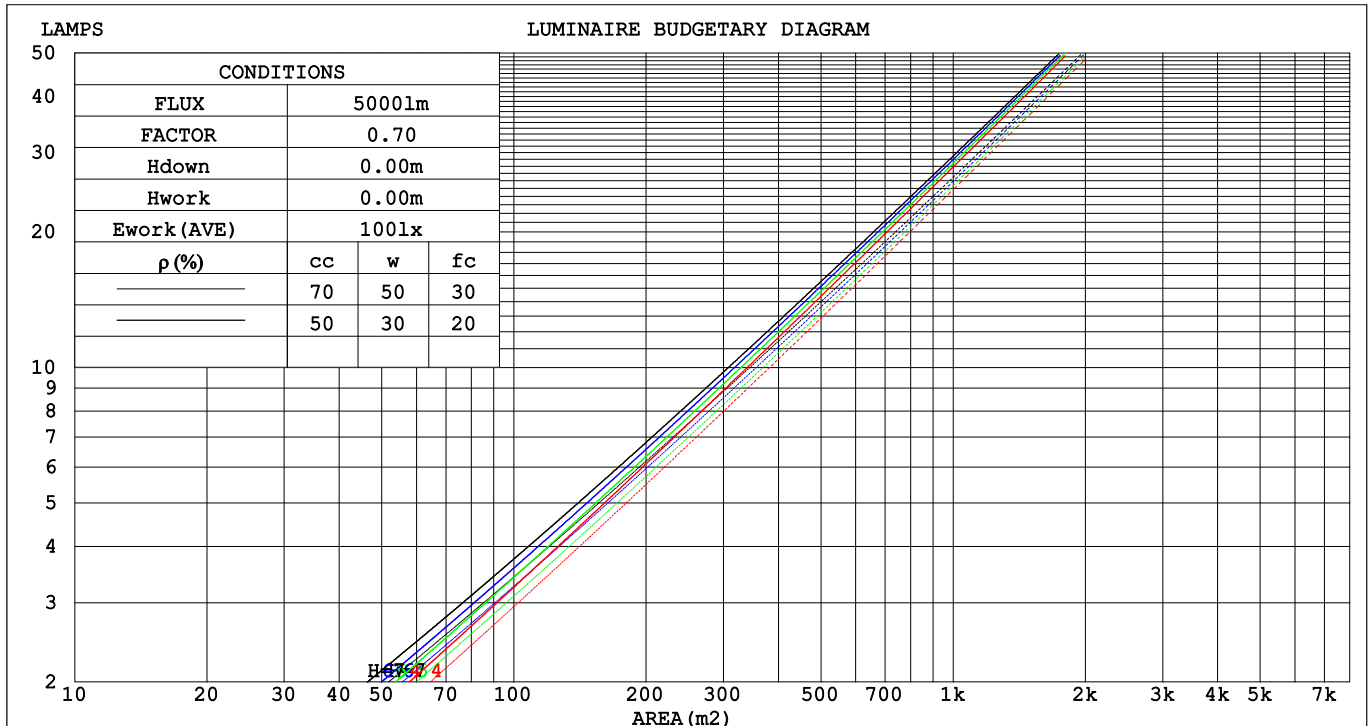

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm																	
NAME: SLDL226F-3030P-TWD11									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: Switch Lighting									SUR.:						Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.152	.086	.027	.145	.083	.026	.132	.076	.024	.121	.070	.022	.110	.064	.021	
2.0	.142	.078	.024	.137	.075	.023	.127	.070	.022	.117	.066	.021	.108	.061	.019	
3.0	.134	.071	.021	.130	.069	.021	.121	.066	.020	.113	.062	.019	.105	.058	.018	
4.0	.127	.066	.019	.123	.064	.019	.116	.061	.018	.109	.058	.018	.102	.056	.017	
5.0	.121	.061	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016	
6.0	.115	.058	.016	.112	.057	.016	.106	.055	.016	.101	.053	.015	.096	.051	.015	
7.0	.110	.054	.015	.107	.053	.015	.102	.052	.015	.098	.050	.015	.094	.049	.014	
8.0	.105	.051	.014	.103	.051	.014	.099	.049	.014	.095	.048	.014	.091	.047	.014	
9.0	.101	.049	.014	.099	.048	.014	.095	.047	.013	.091	.046	.013	.088	.045	.013	
10.0	.097	.046	.013	.095	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.116	.130	.114	.100	.089	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.138	.113	.093	.119	.098	.081	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.127	.098	.077	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.037	.027	.020	.012	.009	.006	
7.0	.102	.069	.045	.088	.059	.040	.061	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.096	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.012	.010	.007	.004	
10.0	.086	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm											
NAME: SLDL226F-3030P-TWD11					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Switch Lighting					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		17.0	17.8	17.3	18.0	18.1	17.1	17.8	17.3	18.0	18.2
3H		16.9	17.6	17.1	17.8	18.0	16.9	17.6	17.2	17.8	18.0
4H		16.8	17.5	17.1	17.7	17.9	16.8	17.5	17.1	17.7	17.9
6H		16.7	17.4	17.0	17.6	17.8	16.8	17.4	17.0	17.6	17.9
8H		16.7	17.3	17.0	17.5	17.8	16.7	17.3	17.0	17.6	17.8
12H		16.6	17.2	16.9	17.5	17.7	16.7	17.2	17.0	17.5	17.8
4H 2H		16.8	17.5	17.1	17.7	17.9	16.8	17.5	17.1	17.7	17.9
3H		16.6	17.2	17.0	17.5	17.8	16.7	17.3	17.0	17.5	17.8
4H		16.5	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
6H		16.4	16.9	16.8	17.2	17.6	16.5	16.9	16.8	17.3	17.6
8H		16.4	16.8	16.8	17.2	17.5	16.4	16.9	16.8	17.2	17.6
12H		16.3	16.7	16.7	17.1	17.5	16.4	16.8	16.8	17.1	17.5
8H 4H		16.4	16.8	16.8	17.2	17.5	16.4	16.9	16.8	17.2	17.6
6H		16.3	16.6	16.7	17.0	17.4	16.3	16.7	16.7	17.1	17.5
8H		16.2	16.5	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
12H		16.2	16.4	16.6	16.9	17.3	16.2	16.5	16.7	16.9	17.4
12H 4H		16.3	16.7	16.7	17.1	17.5	16.4	16.8	16.8	17.1	17.5
6H		16.2	16.5	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
8H		16.2	16.4	16.6	16.9	17.3	16.2	16.5	16.7	16.9	17.4
Variations with the observer position at spacings:											
S = 1.0H		+ 5.1 / -10.7					+ 5.2 / -10.8				
1.5H		+ 7.6 / - 8.8					+ 7.6 / - 8.4				
2.0H		+ 4.7 / - 5.1					+ 4.8 / - 5.6				

CIE Pub.117, 623.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	86
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

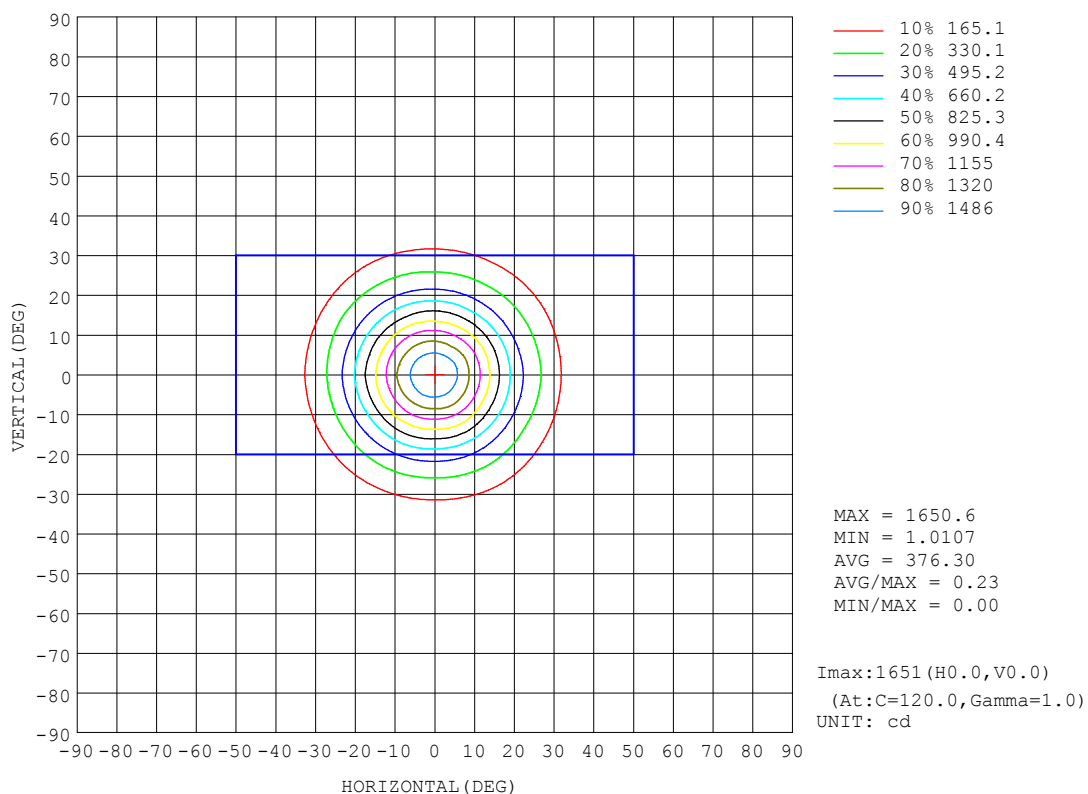


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

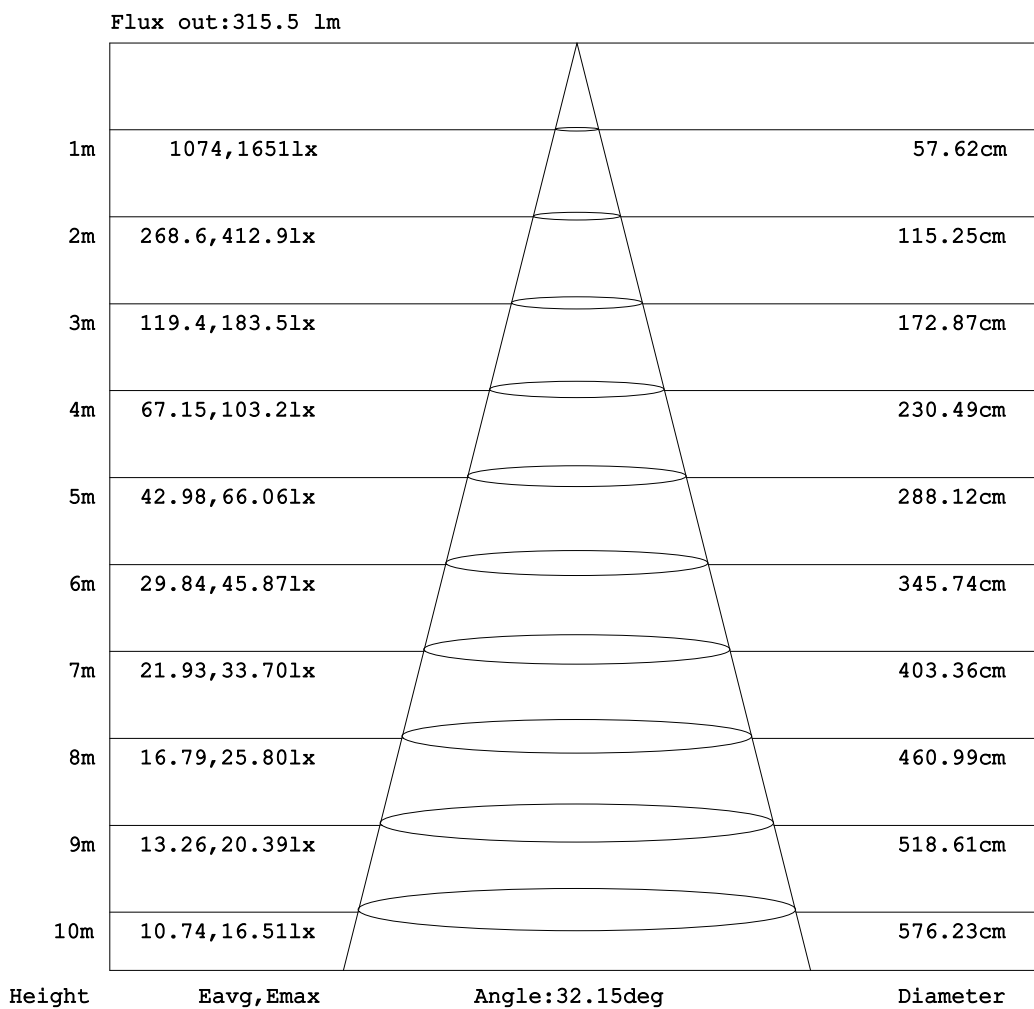


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

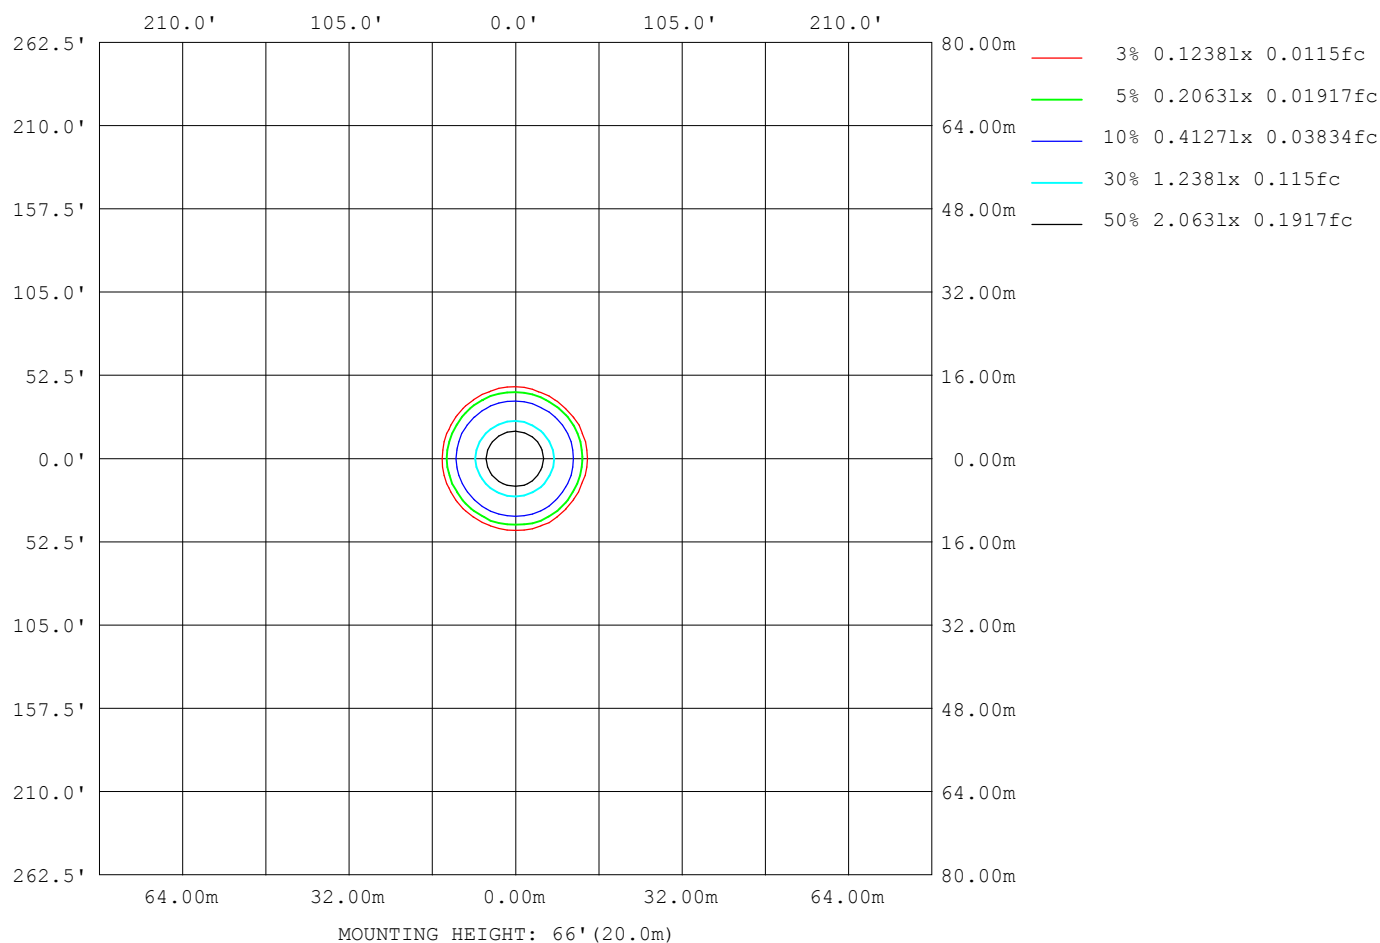

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:22 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:229.90V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:623.139x1 lm		
NAME: SLDL226F-3030P-TWD11	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	774
L_0~180 (75) av	173
L_0~180 (85) av	139
L_90~270 (65) av	787
L_90~270 (75) av	159
L_90~270 (85) av	119
L_45 (65) av	712
L_45 (75) av	165
L_45 (85) av	114

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:22 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

Planar Illuminance Curve

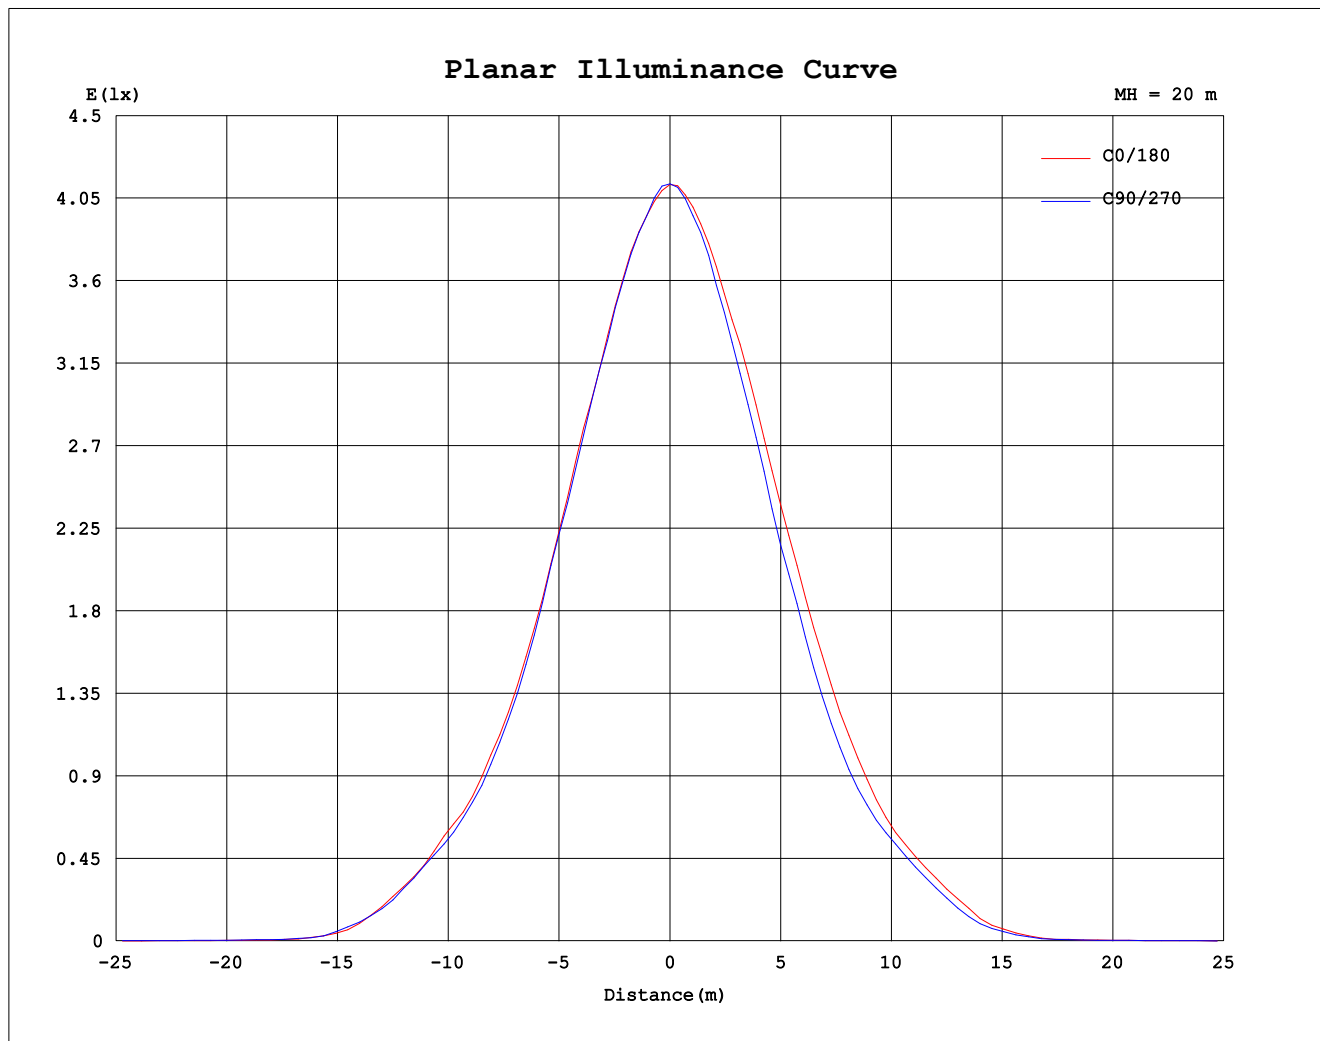

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 22 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

```