


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | | Eff: 52.28 lm/W |
|-------------------|---------|-----------------------|--------|--------------------|--|-----------------|
| MODEL | | I _{max} (cd) | 1039 | S/MH (C0/180) | | 0.73 |
| NOMINAL POWER (W) | | LOR (%) | 100.0 | S/MH (C90/270) | | 0.35 |
| RATED VOLTAGE (V) | | TOTAL FLUX (lm) | 596.03 | η UP,DN (C0-180) | | 0.0,86.6 |
| NOMINAL FLUX (lm) | 596.027 | CIE CLASS | DIRECT | η UP,DN (C180-360) | | 0.0,13.4 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | | 0.75 |
| TEST VOLTAGE (V) | | η down (%) | 100.0 | CIBSE SHR MAX | | 0.75 |

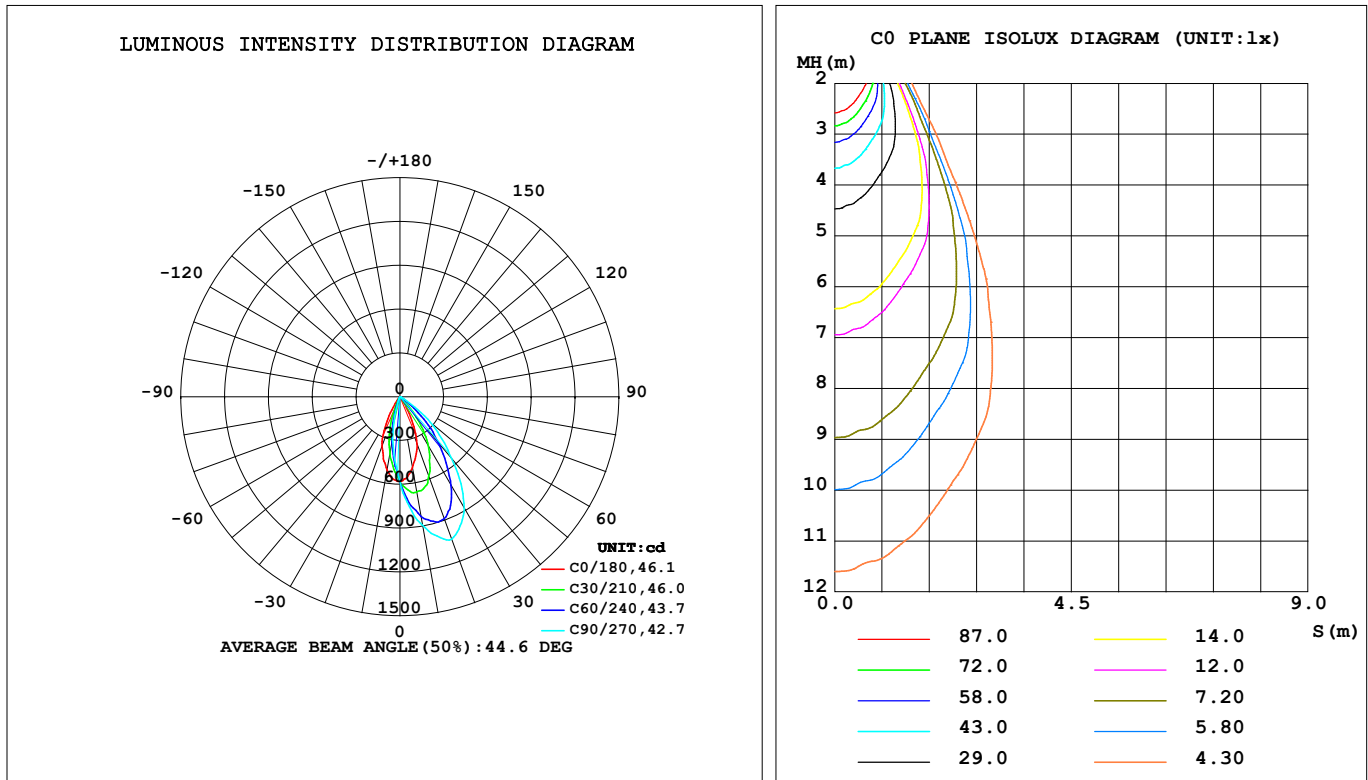

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|----------|-----------------------|--------|--------|--------|--------|--------|--------|--------|----------|-------------|--------------|-----------|
| 10 | 493.3 | 748.0 | 892.1 | 759.3 | 509.8 | 357.9 | 295.8 | 349.5 | 0- 10 | 54.35 | 54.35 | 9.12,9.12 |
| 20 | 342.9 | 733.1 | 1039 | 765.6 | 360.0 | 123.0 | 45.57 | 107.0 | 10- 20 | 139.7 | 194.0 | 32.6,32.6 |
| 30 | 108.3 | 545.6 | 883.6 | 589.2 | 150.8 | 16.50 | 6.845 | 15.27 | 20- 30 | 166.1 | 360.1 | 60.4,60.4 |
| 40 | 17.44 | 286.1 | 549.8 | 319.3 | 23.26 | 3.651 | 1.921 | 2.672 | 30- 40 | 135.5 | 495.7 | 83.2,83.2 |
| 50 | 2.914 | 83.20 | 273.6 | 103.2 | 4.328 | 1.044 | 0.8220 | 0.8894 | 40- 50 | 75.79 | 571.4 | 95.9,95.9 |
| 60 | 0.8123 | 9.978 | 34.86 | 11.65 | 0.9793 | 0.5405 | 0.5849 | 0.5329 | 50- 60 | 21.68 | 593.1 | 99.5,99.5 |
| 70 | 0.2655 | 0.5515 | 1.525 | 0.5232 | 0.2592 | 0.3979 | 0.4629 | 0.3943 | 60- 70 | 2.535 | 595.7 | 99.9,99.9 |
| 80 | 0.1289 | 0.0876 | 0.0791 | 0.0860 | 0.1250 | 0.2307 | 0.2965 | 0.2277 | 70- 80 | 0.2773 | 595.9 | 100,100 |
| 90 | 0 | 0 | 0 | 0 | 0.0015 | 0.0040 | 0.0115 | 0.0004 | 80- 90 | 0.0853 | 596.0 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |

C Range: 0 - 360DEG

C Interval: 30.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:Jason

Test Date:28 July 2020

 γ Range: 0 - 90DEG

 γ Interval: 1.0DEG

Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401


Humidity:65.0%

Test Distance:3.160m [K=1.0000]

Remarks:

LUMINANCE LIMITATION CURVES

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

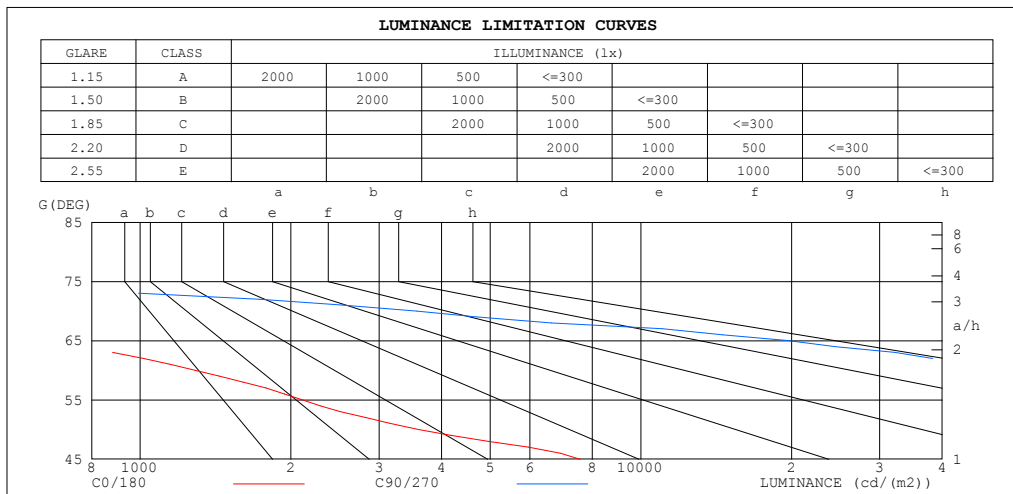

| LUMINANCE cd/(m2) | | |
|-------------------|--------|---------|
| G (DEG) | C0/180 | C90/270 |
| 85 | 545 | 297 |
| 80 | 589 | 365 |
| 75 | 617 | 460 |
| 70 | 616 | 3572 |
| 65 | 677 | 19676 |
| 60 | 1289 | 55842 |
| 55 | 2106 | 178718 |
| 50 | 3596 | 340962 |
| 45 | 7561 | 458740 |


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | | | | | | | | | | |

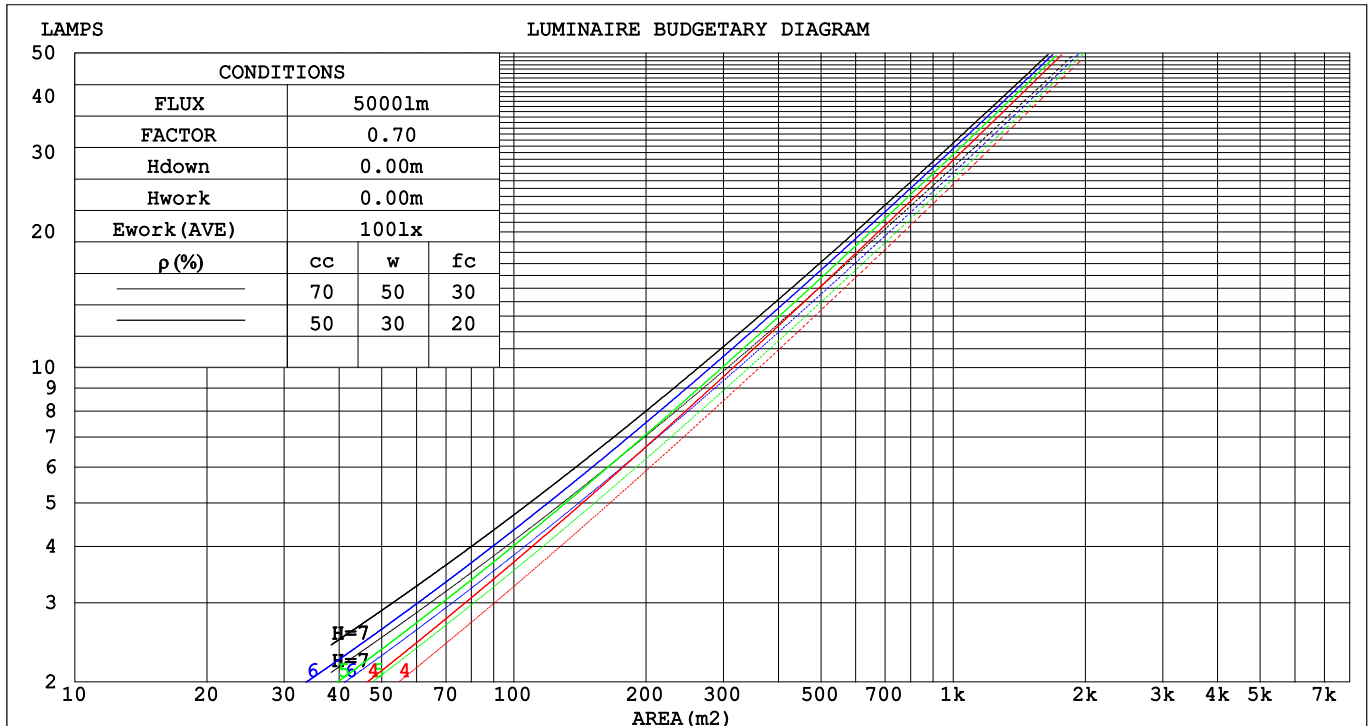

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

WEC AND CCEC

| | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|-------|--|--|--|--|--|------------------|--|--|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | | | | | | | | | | | | | | | | |
| NAME: SLDL256T-4030P-TWD11 | | | | | | | | | TYPE: | | | | | | WEIGHT: | | |
| SPEC.: | | | | | | | | | DIM.: | | | | | | SERIAL No.: | | |
| MFR.: Switch Lighting | | | | | | | | | SUR.: | | | | | | Shielding Angle: | | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .190 | .108 | .034 | .183 | .104 | .033 | .171 | .098 | .031 | .159 | .092 | .029 | .148 | .086 | .028 | |
| 2.0 | .184 | .101 | .031 | .178 | .098 | .030 | .168 | .093 | .029 | .158 | .089 | .028 | .149 | .084 | .027 | |
| 3.0 | .177 | .094 | .028 | .172 | .092 | .028 | .162 | .088 | .027 | .154 | .084 | .026 | .146 | .081 | .025 | |
| 4.0 | .169 | .088 | .026 | .164 | .086 | .025 | .156 | .083 | .025 | .149 | .080 | .024 | .142 | .077 | .023 | |
| 5.0 | .161 | .082 | .024 | .157 | .081 | .023 | .150 | .078 | .023 | .144 | .076 | .023 | .137 | .073 | .022 | |
| 6.0 | .153 | .077 | .022 | .150 | .076 | .022 | .144 | .074 | .021 | .138 | .072 | .021 | .133 | .070 | .021 | |
| 7.0 | .146 | .072 | .021 | .144 | .072 | .020 | .138 | .070 | .020 | .133 | .068 | .020 | .128 | .066 | .020 | |
| 8.0 | .140 | .068 | .019 | .137 | .068 | .019 | .132 | .066 | .019 | .128 | .065 | .019 | .123 | .063 | .018 | |
| 9.0 | .134 | .065 | .018 | .131 | .064 | .018 | .127 | .063 | .018 | .123 | .062 | .018 | .119 | .060 | .017 | |
| 10.0 | .128 | .061 | .017 | .126 | .061 | .017 | .122 | .060 | .017 | .118 | .059 | .017 | .114 | .058 | .017 | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 | |
|------|-----------------------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|---|--|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 | |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 | |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients (CCEC) | | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | | |
| 1.0 | .172 | .157 | .144 | .147 | .135 | .124 | .101 | .093 | .086 | .058 | .054 | .050 | .019 | .017 | .016 | | |
| 2.0 | .158 | .132 | .111 | .135 | .114 | .096 | .093 | .079 | .067 | .053 | .046 | .039 | .017 | .015 | .013 | | |
| 3.0 | .146 | .114 | .088 | .126 | .098 | .076 | .086 | .068 | .053 | .050 | .040 | .031 | .016 | .013 | .010 | | |
| 4.0 | .137 | .099 | .070 | .118 | .086 | .061 | .081 | .060 | .043 | .047 | .035 | .025 | .015 | .011 | .008 | | |
| 5.0 | .129 | .088 | .058 | .111 | .076 | .050 | .076 | .053 | .035 | .044 | .031 | .021 | .014 | .010 | .007 | | |
| 6.0 | .122 | .079 | .048 | .105 | .068 | .042 | .072 | .048 | .029 | .042 | .028 | .018 | .014 | .009 | .006 | | |
| 7.0 | .116 | .071 | .040 | .099 | .062 | .035 | .069 | .043 | .025 | .040 | .026 | .015 | .013 | .008 | .005 | | |
| 8.0 | .110 | .065 | .035 | .095 | .057 | .030 | .066 | .040 | .021 | .038 | .023 | .013 | .012 | .008 | .004 | | |
| 9.0 | .105 | .060 | .030 | .090 | .052 | .026 | .063 | .037 | .019 | .037 | .022 | .011 | .012 | .007 | .004 | | |
| 10.0 | .100 | .056 | .026 | .087 | .049 | .023 | .060 | .034 | .016 | .035 | .020 | .010 | .011 | .007 | .003 | | |

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

| | | | | | | | | | | | |
|--|---------------|------------------|------|------|-------|---------------|----------------|------------------|------|------|------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | | | | | | | | | | |
| NAME: SLDL256T-4030P-TWD11 | | | | | TYPE: | | | WEIGHT: | | | |
| SPEC.: | | | | | DIM.: | | | SERIAL No.: | | | |
| MFR.: Switch Lighting | | | | | SUR.: | | | Shielding Angle: | | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | 2H | 25.6 | 26.7 | 25.9 | 26.9 | 27.0 | 34.3 | 35.3 | 34.5 | 35.5 | 35.7 |
| | 3H | 25.5 | 26.4 | 25.7 | 26.6 | 26.8 | 34.1 | 35.1 | 34.4 | 35.3 | 35.5 |
| | 4H | 25.4 | 26.3 | 25.7 | 26.5 | 26.7 | 34.0 | 34.9 | 34.3 | 35.1 | 35.4 |
| | 6H | 25.3 | 26.1 | 25.6 | 26.4 | 26.6 | 33.9 | 34.8 | 34.2 | 35.0 | 35.3 |
| | 8H | 25.2 | 26.0 | 25.5 | 26.3 | 26.6 | 33.9 | 34.7 | 34.2 | 35.0 | 35.2 |
| | 12H | 25.2 | 26.0 | 25.5 | 26.2 | 26.5 | 33.8 | 34.6 | 34.2 | 34.9 | 35.2 |
| 4H | 2H | 25.6 | 26.5 | 25.9 | 26.7 | 26.9 | 34.0 | 34.9 | 34.3 | 35.1 | 35.4 |
| | 3H | 25.4 | 26.2 | 25.7 | 26.4 | 26.7 | 33.8 | 34.6 | 34.2 | 34.9 | 35.2 |
| | 4H | 25.3 | 26.0 | 25.7 | 26.3 | 26.6 | 33.7 | 34.4 | 34.1 | 34.7 | 35.1 |
| | 6H | 25.2 | 25.8 | 25.6 | 26.2 | 26.5 | 33.7 | 34.3 | 34.0 | 34.6 | 34.9 |
| | 8H | 25.2 | 25.7 | 25.6 | 26.1 | 26.5 | 33.6 | 34.2 | 34.0 | 34.5 | 34.9 |
| | 12H | 25.1 | 25.6 | 25.5 | 26.0 | 26.4 | 33.6 | 34.1 | 34.0 | 34.4 | 34.8 |
| 8H | 4H | 25.2 | 25.7 | 25.6 | 26.1 | 26.5 | 33.6 | 34.2 | 34.0 | 34.5 | 34.9 |
| | 6H | 25.1 | 25.5 | 25.5 | 25.9 | 26.3 | 33.5 | 34.0 | 33.9 | 34.4 | 34.8 |
| | 8H | 25.0 | 25.4 | 25.5 | 25.8 | 26.3 | 33.5 | 33.9 | 33.9 | 34.3 | 34.7 |
| | 12H | 25.0 | 25.3 | 25.4 | 25.8 | 26.2 | 33.4 | 33.8 | 33.9 | 34.2 | 34.7 |
| 12H | 4H | 25.1 | 25.6 | 25.5 | 26.0 | 26.4 | 33.6 | 34.1 | 34.0 | 34.4 | 34.8 |
| | 6H | 25.0 | 25.4 | 25.5 | 25.8 | 26.3 | 33.5 | 33.9 | 33.9 | 34.3 | 34.7 |
| | 8H | 25.0 | 25.3 | 25.4 | 25.8 | 26.2 | 33.4 | 33.8 | 33.9 | 34.2 | 34.7 |
| Variations with the observer position at spacings: | | | | | | | | | | | |
| S = 1.0H | + 3.4 / -17.5 | | | | | + 3.2 / - 8.3 | | | | | |
| 1.5H | + 4.8 / -14.6 | | | | | + 3.4 / - 9.2 | | | | | |
| 2.0H | + 6.3 / -15.2 | | | | | + 6.5 / -17.1 | | | | | |

CIE Pub.117, 596.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |


| REFLECTANCE | | | | | | | | | | |
|----------------------------------|--|-----|-----------|-----|-----|-----|-----|---------------|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 81 | 73 | 69 | 80 | 73 | 69 | 79 | 73 | 68 | 64 |
| 0.80 | 89 | 82 | 78 | 89 | 82 | 78 | 87 | 81 | 77 | 73 |
| 1.00 | 95 | 89 | 84 | 94 | 88 | 84 | 93 | 88 | 84 | 79 |
| 1.25 | 100 | 94 | 90 | 99 | 94 | 90 | 97 | 92 | 89 | 84 |
| 1.50 | 103 | 98 | 94 | 102 | 97 | 94 | 100 | 96 | 92 | 88 |
| 2.00 | 107 | 102 | 99 | 105 | 101 | 98 | 103 | 99 | 96 | 91 |
| 2.50 | 109 | 104 | 101 | 107 | 103 | 100 | 104 | 101 | 98 | 92 |
| 3.00 | 111 | 107 | 104 | 109 | 105 | 103 | 105 | 103 | 100 | 94 |
| 4.00 | 113 | 110 | 107 | 111 | 108 | 106 | 107 | 105 | 103 | 96 |
| 5.00 | 114 | 111 | 109 | 112 | 110 | 108 | 108 | 106 | 105 | 97 |
| ROOM INDEX | UF(total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | Suspended | | | | | SHRNOM = 1.25 | | |

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

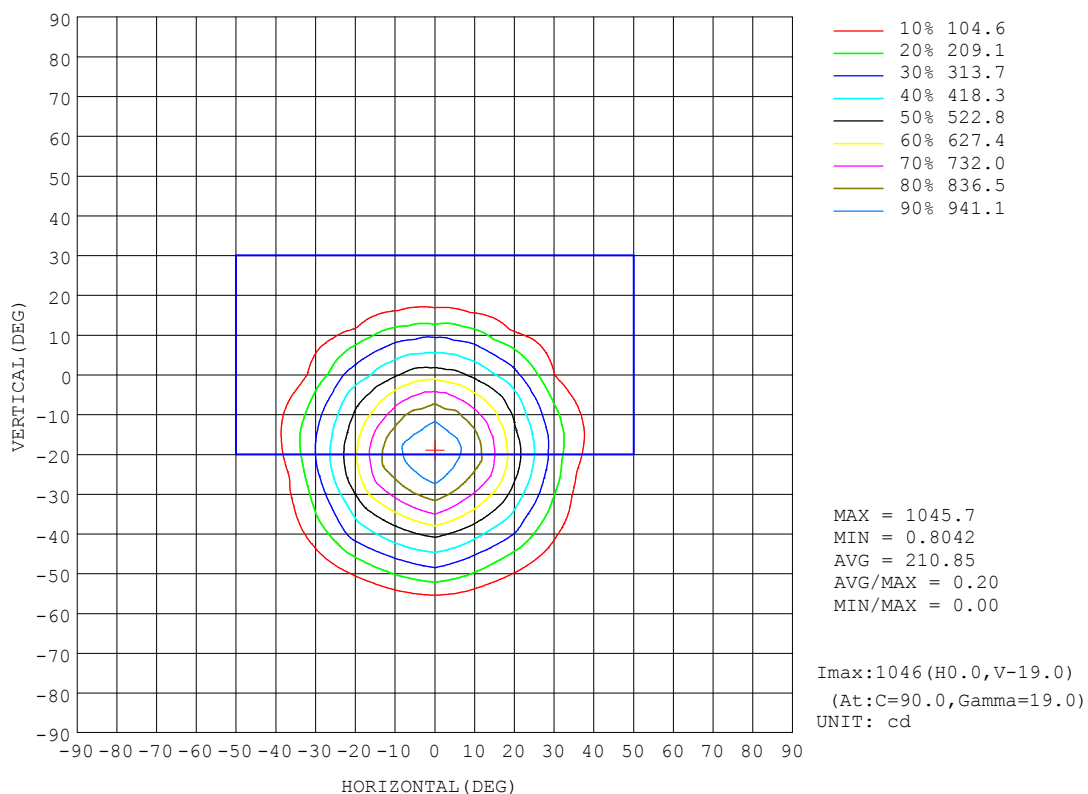


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

AAI Figure

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

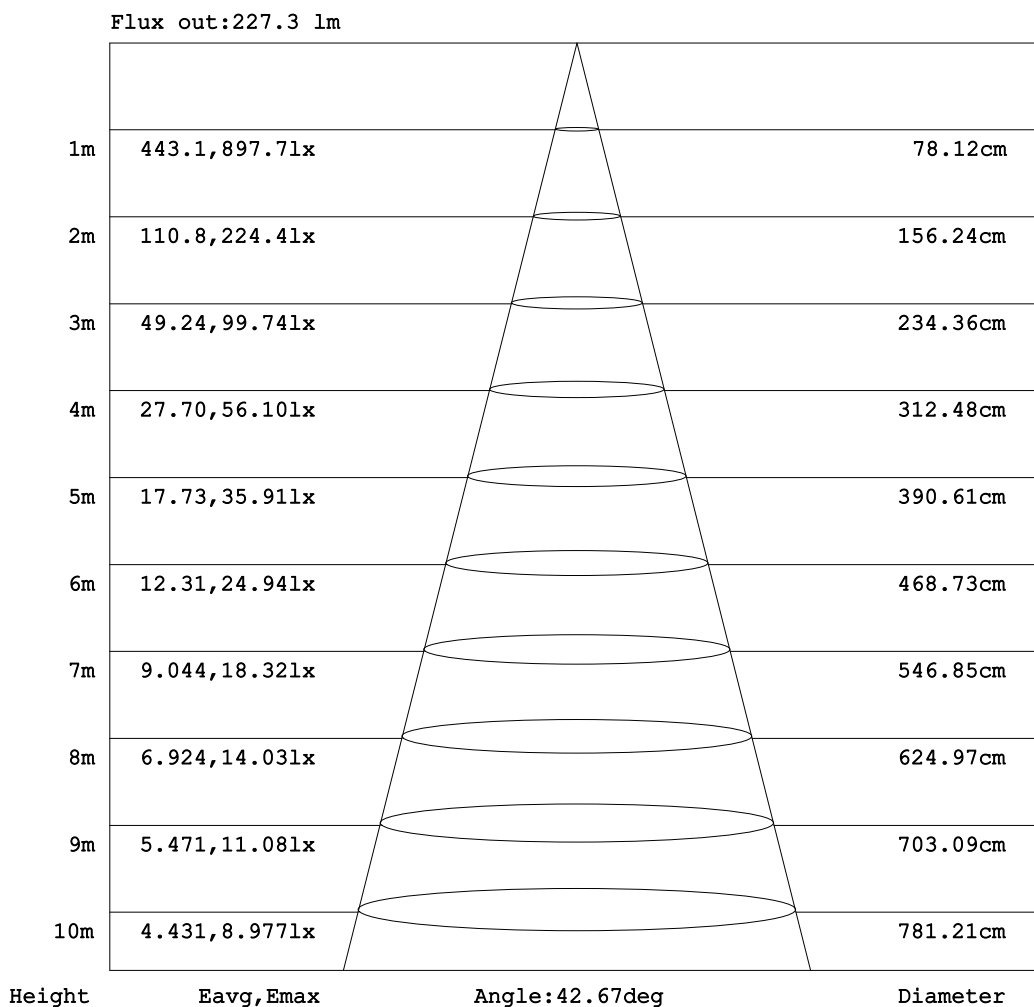


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

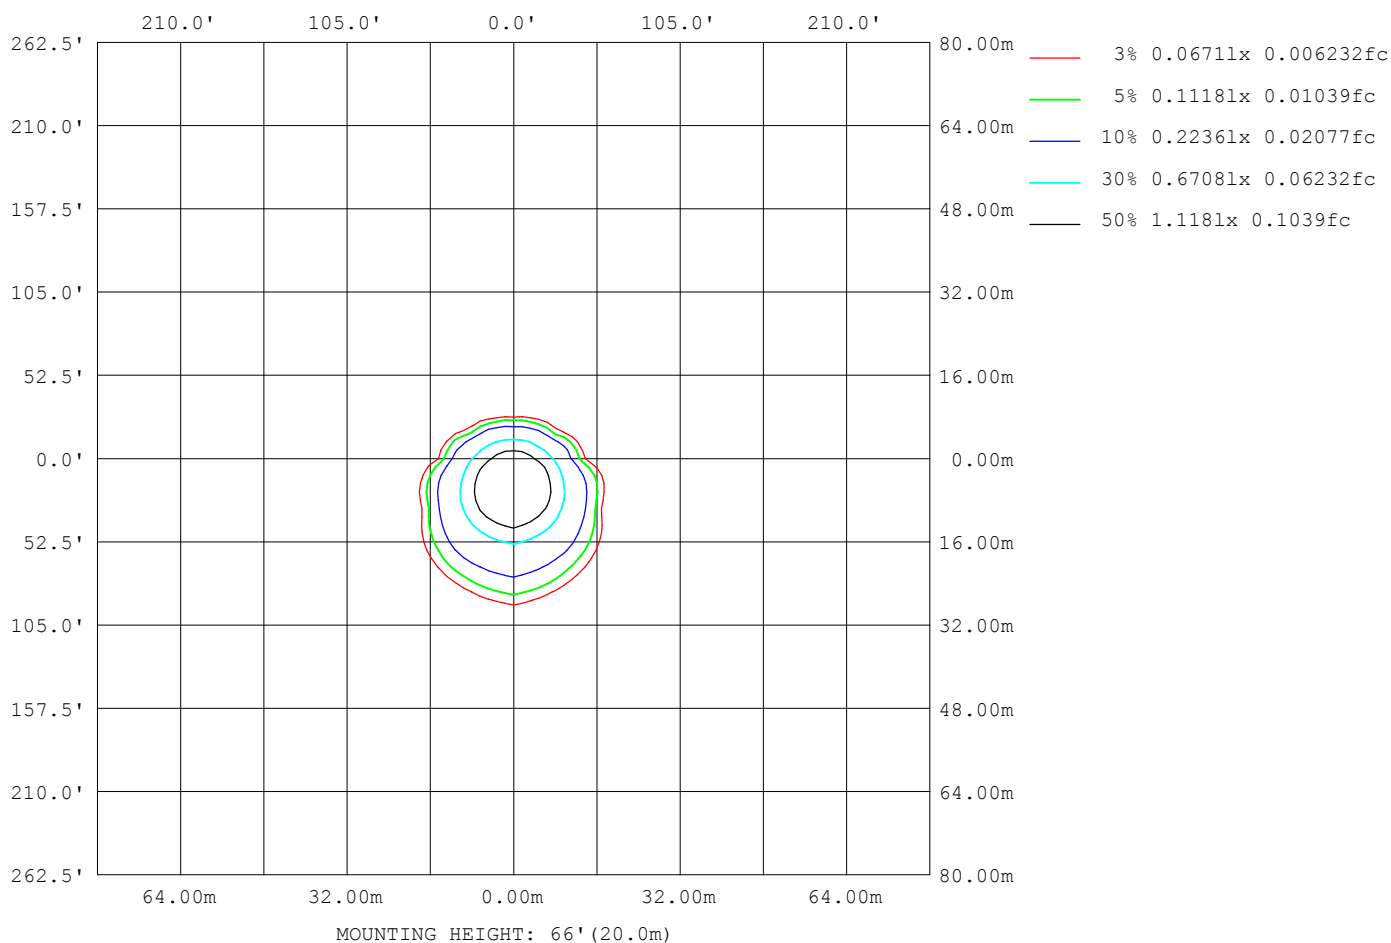

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

LED Avg.L Report

| | | |
|--|-------|------------------|
| Test:U:230.00V I:0.0510A P:11.400W PF:0.9800 Freq:50.00Hz Lamp Flux:596.027x1 lm | | |
| NAME: SLDL256T-4030P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |


| AvgL | cd/m2 |
|------------------|-------|
| L_0~180 (65) av | 743 |
| L_0~180 (75) av | 610 |
| L_0~180 (85) av | 525 |
| L_90~270 (65) av | 10279 |
| L_90~270 (75) av | 825 |
| L_90~270 (85) av | 937 |
| L_45 (65) av | 2980 |
| L_45 (75) av | 695 |
| L_45 (85) av | 717 |

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

Planar Illuminance Curve

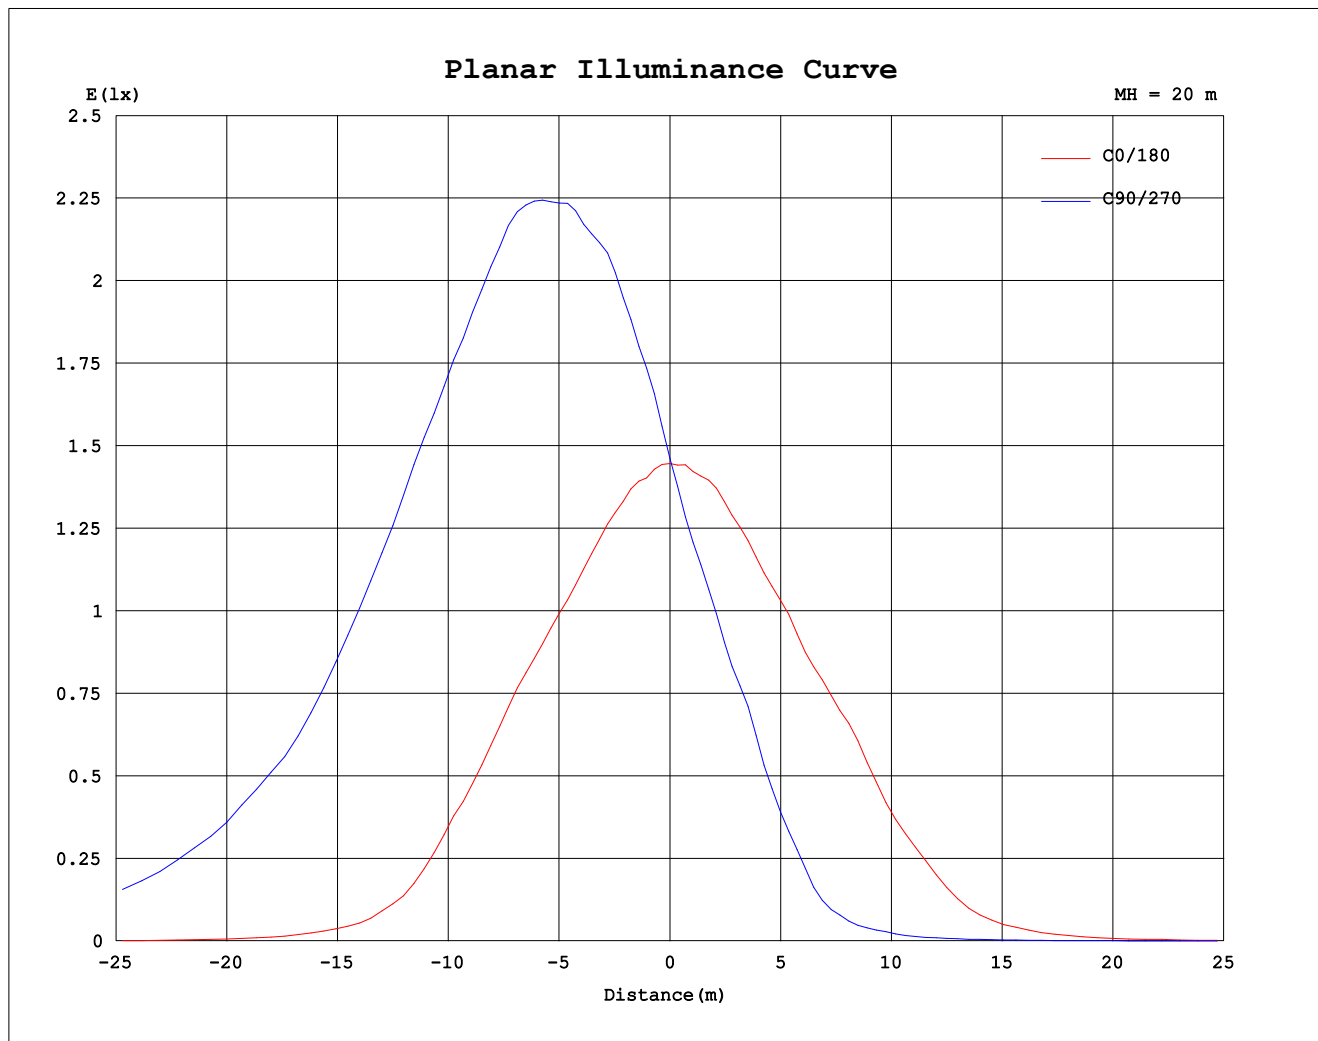

C Range: 0 - 360DEG

C Interval: 30.0DEG

Test Speed: HIGH

Temperature: 25.3DEG

Operators: Jason

Test Date: 28 July 2020

 γ Range: 0 - 90DEG γ Interval: 1.0DEG

Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401

Humidity: 65.0%

Test Distance: 3.160m [K=1.0000]

Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks:

```