

SLED

by Switch Lighting



SLBN212
1220mm




SLBN215 / SLBN235
1520mm

Under-veranda batten

Lighting excellence for every space

- + quick to install
- + strong rigid construction
- + selectable CCT - 3000K / 4000K / 5700K*
- + flicker-free
- + SS clips
- + hanging options included
- + sensor option
- + selectable power output
- + IP66, IK08
- + constant current

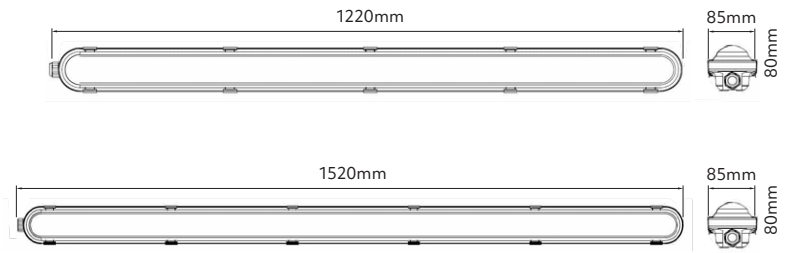

Options

Beam angle



120°

Trim colour



White

Selectable CCT*



3000K



4000K




5700K

CRI

CRI 80

Accessory – Batten Sensor

- ultra-slim sensor for SLBN215 IP66 batten
- patented antenna design ensures reliable detection
- adjustable detection sensitivity via DIP switches makes it suitable for a variety of installation sites
- supports up to 6m max. mounting height
- easy installation (by registered electrician) complete kit to retro fit to battens
- 5 years warranty
- ordered separately

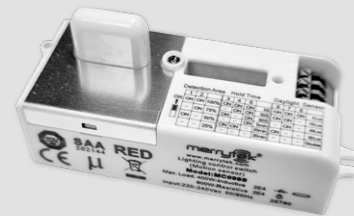

SLBN212



Size
1220x85x80mm

SLBN215 / SLBN235



Size
1520x85x80mm

Product specification information

Model	Length (mm)	Emergency back-up	Sensor	Selectable CCT (K)	Power (W)	Delivered lumens (lm@4000K)	CRI
SLBN212-S3-W	1200	-	-	3000, 4000, 5700	34	4950	80
SLBN215-S3-W	1500	-	-	3000, 4000, 5700	52	7340	80
					45	6350	
					38	5360	
					32	4520	
SLBN235-S3-W	1500	Yes	-	3000, 4000, 5700	56	7280	80

*Before installation – via the switch on the back of the housing, choose from 3000K, 4000K, 5700K.

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.

Warranty
5 Years

L70 (50,000 h)

