

# *sLED*

by **Switch Lighting**



**SLCD121F**  
Ø170mm

Commercial lighting



**SLCD151F**  
Ø235mm


Commercial lighting



# Commercial Downlight

Lighting excellence for every space

- + low glare UGR<19
- + switchable CCT (3000/4000/5700K) or single CCT (4000K) options
- + flicker free dimmable driver included
- + L70 50,000 hours
- + IP54 front
- + constant current

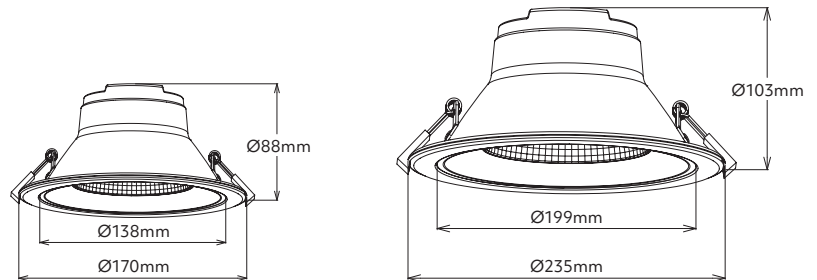

## Options

### Beam angle



60°

### Switchable CCT



3000K



4000K



5700K

### Single CCT



4000K

### Trim colour



White  
(RAL9016)

CRI  
CRI 90

## Product information

**Example:** 60°, 4000K, CRI 90

Contact Switch Lighting for data of other variants

Model	Power (W)	Driver (mA)	Delivered lumens (lm)	Insulation Coverable		
				NZ	AU	UK/EU
SLCD121	18	450	1600	ICF	IC4	✓
SLCD151	25	650	2300	ICF	IC4	✓

SLCD121F



Size  
170x88mm



Cut-out  
Ø140-150mm



Hole depth  
>88mm



Front

SLCD151F



Size  
235x103mm



Cut-out  
Ø200-210mm



Hole depth  
>103mm



Front

## how to specify SLED Commercial

Please confirm model option availability from our website.

e.g. code = **SLCD121F-6040P-TWD62**

Model	Beam	CCT	Pure Colour	Trim Colour	Market
SLCD121F = Ø170mm SLCD151F = Ø235mm	60 = 60°	S3 = 3000K   4000K   5700K (switchable) 40 = 4000K	P = CRI 90	TW = White	<ul style="list-style-type: none"> <li>■ = NZ</li> <li>1 = Aust</li> <li>2 = UK</li> <li>3 = EU</li> </ul>

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for specifications, lux levels, SDoCs, ies files and installation instructions.

Warranty  
5 Years

L70 (50,000 h)

