

sLED

by Switch Lighting



SLCD121F
Ø170mm
Commercial lighting



SLCD131F
Ø190mm
Commercial lighting




SLCD151F
Ø235mm
Commercial lighting

Commercial Downlight

Lighting excellence for every space

- + low glare UGR<19
- + selectable CCT (3000/4000/5700K)* or single CCT (4000K) options
- + flicker free dimmable driver included
- + L70 50,000 hours
- + IP54 front
- + constant current

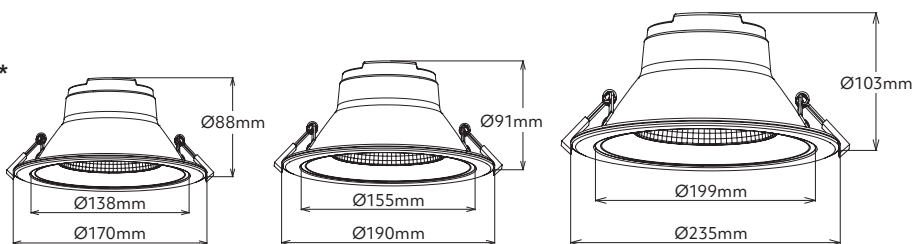

Options

Beam angle



60°

Trim colour



White
RAL 9016

Selectable CCT*



3000K



4000K



5700K

Single CCT



4000K

CRI
CRI 90

Driver

DALI driver available.
Please contact Switch Lighting.

Product information

Table is based on: 60°, 4000K, CRI 90

Contact Switch Lighting for data of other variants

Model	Power (W)	Driver (mA)	Delivered lumens (lm)	Insulation Coverable		
				NZ	AU	UK/EU
SLCD121F	18	450	1600	ICF	IC4	✓
SLCD131F	18	450	1600	ICF	IC4	✓
SLCD151F	25	650	2300	ICF	IC4	✓

SLCD121F



Size
170x88mm



Cut-out
Ø140-150mm



Hole depth
>88mm



Front

SLCD131F



Size
190x90mm



Cut-out
Ø160-170mm



Hole depth
>91mm



Front

SLCD151F



Size
235x103mm



Cut-out
Ø200-210mm



Hole depth
>103mm



Front

How to specify SLED Commercial

Please confirm model option availability from our website.

e.g. code = **SLCD121F-6040P-TWD62**

Model	Beam	CCT	Pure Colour	Trim Colour	Driver	Market
SLCD121F = Ø170mm SLCD131F = Ø190mm SLCD151F = Ø235mm	60 = 60°	S3 = 3000K 4000K 5700K (selectable)* 40 = 4000K	P = CRI 90	TW = White	D62 = 450mA (18W) (SLCD121F SLCD131F) D63 = 650mA (25W) (SLCD151F)	1 = NZ 2 = UK 3 = EU

*Before installation – via the switch on the back of the housing, choose from 3000K, 4000K, 5700K.

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.

Warranty
5 Years

