


sLED
by Switch Lighting

DOME

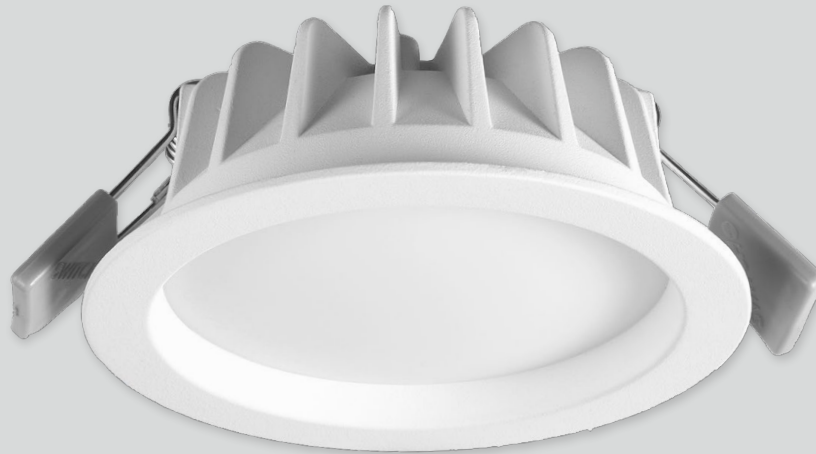

SLED315F
Ø100mm

Wide angle lighting



SLED215F
Ø84mm

Wide angle lighting







SLED DOME Fixed

SLED 215F | SLED315F

- + general purpose flood lighting
- + switchable CCT
- + CRI 90
- + pure convex diffusion
- + trim matches ZELA range
- + IP65 front
- + constant current



Options

Beam angle



110°

Diffuser

Opaque

Trim colour



Textured
White
RAL 9016

Textured
Black
B104

Switchable CCT



2700K



3000K



4000K

CRI

Professional series (P) CRI 90

Driver

Phase cut dimming included



9-36VDC input options available
Click the QR code for low voltage driver options

Product information

Example: 3000K, phase cut driver

Contact Switch Lighting for data of other variants

Model	Power (W)	Delivered lumens (lm)*	Insulation coverable		
			NZ	AU	UK/EU
SLED215F	7	690	ICF	IC4	✓
SLED315F	10	800	ICF	IC4	✓

*Please note: lumens are for the white version. Lumens for the black are reduced.

SLED315F



Size
100x36mm



Cut-out
Ø86-89mm



Hole depth
>40mm



Front

SLED215F



Size
84x37mm



Cut-out
Ø70-73mm



Hole depth
>40mm



Front

how to specify SLED Fixed

e.g. code = **SLED315F-W1S1P-TW**

Model	Beam	Switchable CCT	CRI	Trim Colour
SLED215F SLED315F	W1 = 110° convex	S1 = 2700K 3000K 4000K	P = 90	TW = Textured White TB = Textured Black

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

