




sLED

by Switch Lighting



SLBN312
1200mm
General lighting

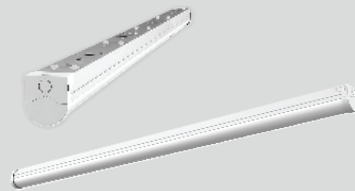


SLBN315
1500mm
General lighting



Batten light

- + up to 140Lm/W
- + fast installation
- + multiple cable entry points
- + flicker free non-dimming driver included
- + selectable power output
- + IP20
- + constant current

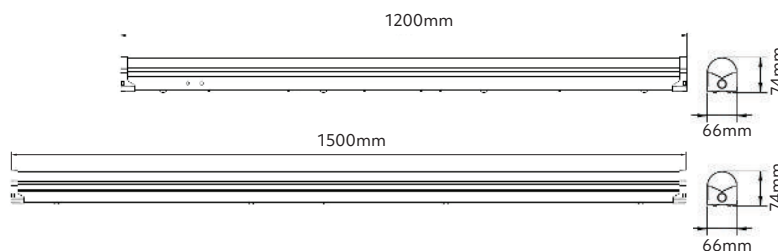

Options

Beam angle



120°

Trim colour



White

CCT



4000K



5000K



6500K

CRI

CRI 90, CRI 95

Please confirm model option availability on the below table.

SLBN312



Size
1.2mx66mm



SLBN315



Size
1.5mx66mm



Product specification information

Model	Length (mm)	Emergency back-up	CCT (K)	Selectable power	Power (W)	Delivered lumens (lm)	CRI
SLBN312-40-P-W	1200	-	4000	Yes	38	4900	90
					35	4600	
					32	4200	
					29	3850	
SLBN315-40-P-W	1500	-	4000	Yes	60	8400	90
					56	7800	
					52	7200	
					45	6300	
SLBN315-65-P-W	1500	-	6500	Yes	60	8400	90
					56	7800	
					52	7200	
					45	6300	
SLBN335-40-P-W	1500	Yes	4000	No	60	8100	90
SLBN115-40-P-W	1500	-	4000	Yes	60	5700	95
					56	5320	
					52	4940	
					45	4280	
SLBN115-50-P-W	1500	-	5000	Yes	60	5940	95
					56	5540	
					52	5150	
					45	4460	

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (50,000 h)

