


Installation Instructions

SLED314F Low Glare luminaire with coverable driver
SLED314T Low Glare luminaire with coverable driver

Classification: IC-F / IC-4

Recessed luminaire where approved building insulation material that can safely be continuously exposed to 90deg C is allowed to abut and cover the luminaire and the driver.

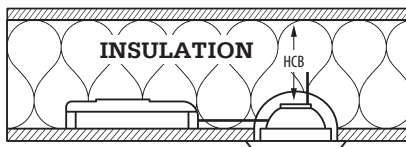

Approved Insulation:

Pink Batts, Bradford Gold, InsulPro Polyester insulation, Ecofleece, Autex Greenstuf, Earthwool, Premier insulation.

Contact Switch Lighting for other insulation information.

Caution:

Macerated paper (Insul-fluf) and other loose fill insulation as defined in NZS 4246 is not permitted to abut or cover this luminaire and driver or be used anywhere near this downlight. If necessary remove the macerated paper 300mm away from the luminaire and cover with a 600x600mm square of approved insulation.

Dimmer Compatibility:

All Switch Lighting dimmers, PDL universal and trailing edge, Clipsal universal and trailing edge, HPM trailing edge, Legrand EM400A3P.

Contact Switch Lighting for other dimmers.

Warranty:

Luminaire: 5 years **Driver:** 5 years

Proof of purchase is required. See website for full warranty conditions.

www.switch-lighting.co.nz

Required Clearance: Standard

Required clearance from structural members and building elements:

SCB = 0mm **HCB** = 0mm

CCT Selection:

Use the switch on the back of the luminaire to select your CCT.


2700K

OR

3000K

Installation:

1 Cut-out

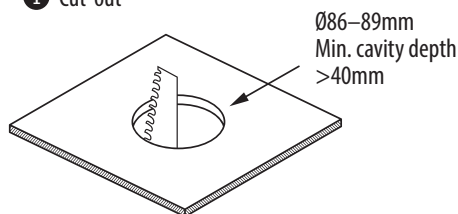

2 AC connection (by registered electrician)



3 Connect luminaire and install in ceiling (no insulation shown for clarity)

