

sLED

by **Switch Lighting**



SLED314T-M1S5P-WW
Medium angle lighting




SLED314T-M1S5P-BB
Medium angle lighting

SLED

Low Glare Downlight – Tilt

Lighting excellence for every space

- + CRI 90
- + 27° tilt angle
- + dimming driver
- + low glare diffusion
- + low profile
- + IP54 front
- + quick connect flicker-free driver
- + selectable CCT 2700K / 3000K*
- + Halogen retrofit
- + up to 120 Lm/w efficacy
- + constant current

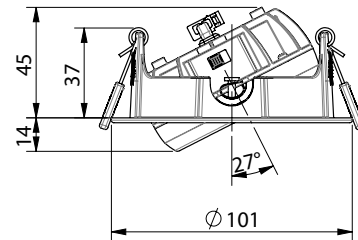

Options

Beam angle



90°

Selectable CCT*



2700K



3000K

Diffuser

Opaque

CRI

Professional series (P) CRI 90

Trim colour



Textured
White
RAL 9016



Textured
Black
B104

Driver

Phase cut dimming included

Product information

CCT (K)	Power (W)	Delivered lumens (lm)	Delivered lumens (lm)	Insulation coverable		
		White	Black	NZ	AU	UK/EU
2700	8	>870	>600	ICF	IC4	✓
3000	8	>870	>600	ICF	IC4	✓



Size
101x45mm



Cut-out
Ø86-89mm



Hole depth
>45mm



Front



Tilt Angle
27°

How to specify SLED314T

e.g. code = **SLED314T-M1S5P-BB**

Model	Beam	Selectable CCT*	CRI	Trim Colour
SLED314T = Low glare tilt	M1 = 90°	S5 = 2700K 3000K	P = 90	BB = Black WW = White

*Before installation – via the switch on the back of the housing, choose from 2700K, 3000K.

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (50,000h)

