


SLED
by Switch Lighting

DOME



SLED215F
Ø84mm
Wide angle lighting

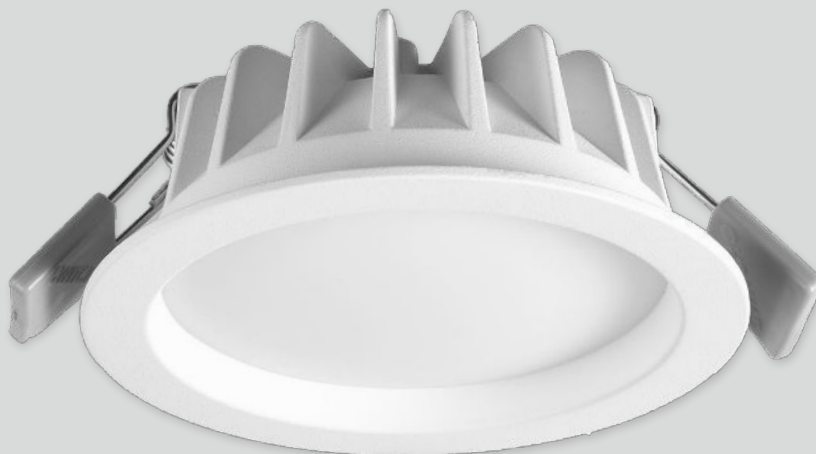


SLED315F
Ø100mm
Wide angle lighting

sLED DOME Fixed

SLED 215F | SLED315F

- + general purpose flood lighting
- + selectable CCT 2700K / 3000K / 4000K*
- + CRI 90
- + pure convex diffusion
- + trim matches ZELA range
- + IP65 front
- + constant current

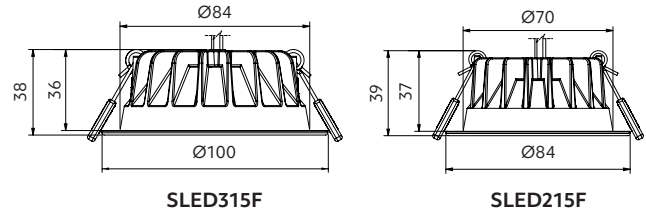

Options

Beam angle



110°

Diffuser

Opaque

Trim colour



Textured White
RAL 9016



Textured Black
B104

Selectable CCT*



2700K



3000K



4000K

CRI

Professional series (P) CRI 90

Driver

Phase cut dimming included

Product information

Table is based on: 3000K, phase cut driver

Contact Switch Lighting for data of other variants

Model	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
SLED215F	7	690	ICF	IC4	✓
SLED315F	10	800	ICF	IC4	✓

Please note: lumens are for the white version. Lumens for the black are reduced.

SLED315F



Size
100x36mm



Cut-out
Ø86-89mm



Hole depth
>40mm



Front

SLED215F



Size
84x37mm



Cut-out
Ø70-73mm



Hole depth
>40mm



Front

How to specify SLED Fixed

e.g. code = **SLED315F-W1S1P-TW**

Model	Beam	Selectable CCT*	CRI	Trim Colour
SLED215F SLED315F	W1 = 110° convex	S1 = 2700K 3000K 4000K	P = 90	TW = Textured White TB = Textured Black


*Before installation – via the switch on the back of the housing, choose from 2700K, 3000K, 4000K.

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000h)



SLED
by Switch Lighting

DOME



SLED415F
Ø130mm
Wide angle lighting




SLED515F
Ø156mm
Wide angle lighting

sLED DOME Fixed

SLED415F | SLED515F

- + general purpose flood lighting
- + selectable CCT option 2700K / 3000K / 4000K*
- + CRI 90
- + pure convex diffusion
- + trim matches ZELA range
- + sunset dimming option
- + IP65 front
- + constant current

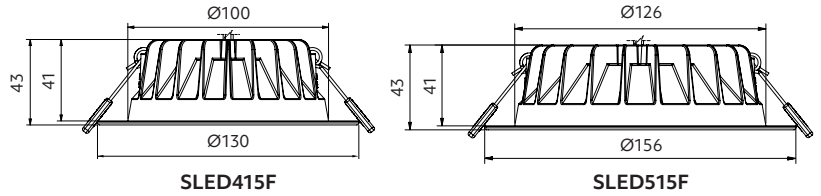

Options

Beam angle



110°

Diffuser

Opaque

Trim colour



Textured White
RAL 9016



Textured Black
B104

Selectable CCT*



2700K



3000K



4000K

Single CCT



3000K
SLED415F
12W



4000K
SLED515F
20W



Sunset Dimming
3000-2000K

CRI

Professional series (P) CRI 90

Driver

Phase cut dimming included

Product information

Table is based on: 3000K, phase cut driver

Contact Switch Lighting for data of other variants

Model	Power (W)	CCT (K)	Delivered lumens (lm)	Insulation coverable		
				NZ	AU	UK/EU
SLED415F	12.2	3000	1100	ICF	IC4	✓
SLED515F	12.2	3000	1100	ICF	IC4	✓

Please note: lumens are for the white version selectable CCT, 3000K single CCT and sunset dimming.

SLED515F	20.6	4000	2000	ICF	IC4	✓
----------	------	------	------	-----	-----	---

Please note: lumens are for the white version single CCT 4000K. Driver is Non IC.

SLED415F				
	Size 130x41mm	Cut-out Ø100-120mm	Hole depth >45mm	Front
SLED515F				
	Size 156x41mm	Cut-out Ø127-140mm	Hole depth >45mm	Front

How to specify SLED Fixed

e.g. code = **SLED415F-W1S1P-TW**

Model	Beam	CCT	CRI	Trim Colour	Market
SLED415F SLED515F	W1 = 110° convex	S1 = 2700K 3000K 4000K Selectable CCT* SD = Sunset Dimming 30 = 3000K Single CCT (SLED415F, 12W only) 40 = 4000K Single CCT (SLED515F, 20W only)	P = 90	TW = Textured White TB = Textured Black	NZ 1 = Aust 2 = UK 3 = EU

*Before installation – via the switch on the back of the housing, choose from 2700K, 3000K, 4000K.

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000h)



PURE COLOUR
HIGH CRI DOWNLIGHTS

