


SLED
by Switch Lighting

DOME

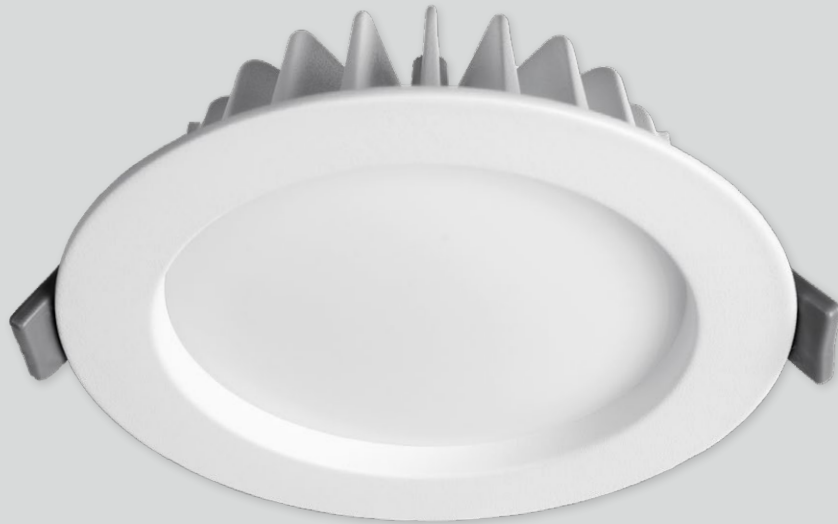

SLED415F
Ø130mm

Wide angle lighting



SLED515F
Ø156mm

Wide angle lighting







SLED DOME Fixed

SLED415F | SLED515F

- + general purpose flood lighting
- + switchable CCT option
- + CRI 90
- + pure convex diffusion
- + trim matches ZELA range
- + sunset dimming option
- + IP65 front
- + constant current

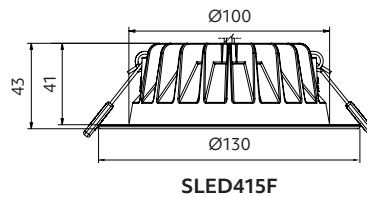

SLED415F

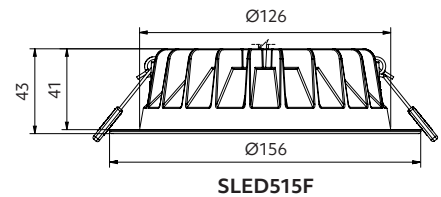

SLED515F

Options

Beam angle



110°

Diffuser

Opaque

Trim colour



Textured
White
RAL 9016

Textured
Black
B104

Switchable CCT



2700K



3000K



4000K

Single CCT



3000K
SLED415F
12W



4000K
SLED515F
20W



Sunset
Dimming
3000-2000K

CRI

Professional series (P) CRI 90

Driver

Phase cut dimming included

9-36VDC input options available

Click the QR code for low voltage driver options



Product information

Example: 3000K, phase cut driver

Contact Switch Lighting for data of other variants

Model	Power (W)	CCT (K)	Delivered lumens (lm)	Insulation coverable		
				NZ	AU	UK/EU
SLED415F	12.2	3000	1100	ICF	IC4	✓
SLED515F	12.2	3000	1100	ICF	IC4	✓

Please note: lumens are for the white version switchable CCT, 3000K single CCT and sunset dimming.

SLED515F	20.6	4000*	2000	ICF	IC4	✓
----------	------	-------	------	-----	-----	---

*Please note: lumens are for the white version single CCT 4000K. Driver is Non IC.

SLED415F



Size
130x41 mm



Cut-out
Ø100-120mm



Hole depth
>45mm



Front

SLED515F



Size
156x41mm



Cut-out
Ø127-140mm



Hole depth
>45mm



Front

how to specify SLED Fixed

e.g. code = **SLED415F-W1S1P-TV**

Model	Beam	CCT	CRI	Trim Colour	Market
SLED415F SLED515F	W1 = 110° convex	S1 = 2700K 3000K 4000K Switchable CCT SD = Sunset Dimming 30 = 3000K Single CCT (SLED415F, 12W only) 40 = 4000K Single CCT (SLED515F, 20W only)	P = 90	TW = Textured White TB = Textured Black	1 = NZ 2 = UK 3 = EU

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

