

Spot-LIGHTZ Mini + Spike



SLSPK-2-EXT
Extender accessory
1-3 can be used



SLGL252



+ 1 EXT = 309
+ 2 EXT = 559 (as shown)
+ 3 EXT = 809



Natural Anodised
Aluminium



Black Anodised
Aluminium




316 Stainless Steel



Spot-LIGHTZ Mini + Spike

- + practical & precision illumination to accentuate landscapes
- + stainless steel and anodised options for coastal high wear & corrosion resistance
- + use outdoors for gardens / path lighting / to highlight architectural elements
- + IP67
- + constant current (Max 700mA)

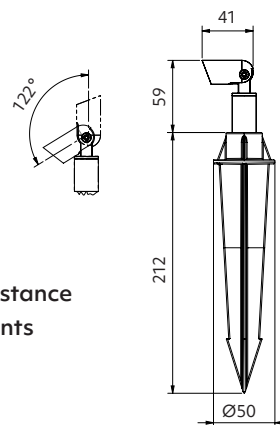

Scan to view website

Options

Beam angle



30° 70°
2700K, 3000K, 4000K



25° 60°
Red, Green, Blue, Amber

Trim colour



Natural
Anodised
Aluminium



Black
Anodised
Aluminium



316 Stainless
Steel

Power supply – constant current

Ordered separately

230VAC circuit (@350mA 1W)

1-3 lights	non-dimming Mini350mA power supply
1-3 lights	TE dimmable SE-9-350-700
3-11 lights	TE dimmable SE-12-100-400 (4-14 R, 3-10 G)
3-13 lights	TE dimmable SE-15-350-700 (4-17 R, 3-12 G)
3-13 lights	dimmable SE-40-300-1050* (5-19 R, 3-12 G)

230VAC circuit (@700mA Max 2.2W)

1 light	non-dimming Mini700mA power supply
1-3 lights	TE dimmable SE-9-350-700
3-6 lights	TE dimmable SE-15-350-700 (4-8 R)
3-13 lights	dimmable SE-40-300-1050* (5-19 R, 3-12 G)

CCT



2700K



3000K



4000K

30°, 70°



Red



Green



Blue



Amber

25°, 60°

Extender

250mm

SLSPK-2-Ext-B Black Anodised Aluminium

SLSPK-2-Ext-N Natural Anodised Aluminium

SLSPK-2-Ext-SS 316 Stainless Steel

Use with

LED protector to protect from power and wiring hazards

Waterproof cable connectors

12 or 24VDC circuit (@350mA 1W)

1-3 lights	LDD-350LW @ 12VDC
1-7 lights	LDD-350LW @ 24VDC

12 or 24VDC circuit (@700mA Max 2.2W)

1-3 lights	LDD-700LW power supply @ 12VDC
1-6 lights	LDD-700LW power supply @ 24VDC

*1-10V, 0-10V, PWM, RX (variable resistor or rheostat)



Scan to view driver options

Product information

Example: 3000K

Contact Switch Lighting for data of other variants

Driver (mA)	Luminaire power (W)	Delivered lumens (lm)	Forward voltage (V _f)
350	1	115	3
700	2.2	215	3



Size
Ø19.5x41mm



Spike size
Ø50x212mm



how to specify Spot-LIGHTZ Mini + Spike

Please confirm model option availability from our website. **Note: driver is ordered separately.**

e.g. code = **SLGL252-7030C-N** (2700K, 3000K, 4000K); **SLGL252-25-R-N** (Red, Green, Blue, Amber)

Model	Beam	CCT	Series	Trim Colour
SLGL252	30 = 30° 70 = 70°	27 = 2700K 30 = 3000K 40 = 4000K	C = Classic	N = Natural Anodised Aluminium B = Black Anodised Aluminium SS = 316 Stainless Steel

Model	Beam	CCT	Trim Colour
SLGL252	25 = 25° 60 = 60°	R = Red G = Green B = Blue A = Amber	N = Natural Anodised Aluminium B = Black Anodised Aluminium SS = 316 Stainless Steel

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000 h)

