





SSUD520F Double Up and down lighting











Wall Light

Lighting excellence for every space

- add a touch of drama & sophistication with multi-directional lighting
- innovative Triple Layer Coating engineered for extended durability in coastal environments
- wall mounted
- suitable for indoor and outdoor applications
- 230VAC internal non-dimming driver
- High CRI
- IP65 / IK07
- constant current (Single 300mA, Double 500mA)



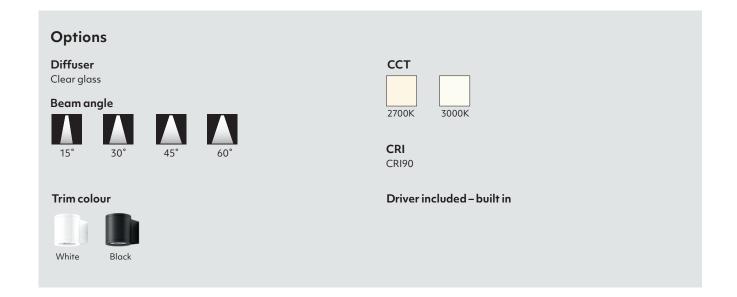

Product information

Example: **3000K**Contact Switch Lighting for data of other variants

Model	System power (W)	Delivered lumens (lm)			
SSUD510F	6.3	450			
SSUD520F	11.1	740 (370×2)			

SSUD510F Single





SSUD520F Double





Size 106x80x90mm

Size 106x80x138mm

how to specify sLED Wall Light

Please confirm model option availability from our website.

e.g. code = SSUD510F-6030P-W								
Model	-	Beam	ССТ	Pure Colour	-	Trim Colour		
SSUD510F = Single		15 = 15° 30 = 30° 45 = 45° 60 = 60°	27 = 2700K 30 = 3000K	P = CRI 90		W = White B = Black		

e.g. code = SSUD520F-<mark>306030P-W</mark>

Model	-	Beam 1	Beam 2	ССТ	Pure Colour	-	Trim Colour
SSUD520F = Double		15 = 15°	15 = 15°	27 = 2700K	P = CRI 90		W = White
		30 = 30°	30 = 30°	30 = 3000K			B = Black
		45 = 45°	45 = 45°				
		60 = 60°	60 = 60°				

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.









