













Wall Light

Lighting excellence for every space

- 🛨 add a touch of drama & sophistication with multi-directional lighting
- innovative Triple Layer Coating engineered for extended durability in coastal environments
- wall mounted
- suitable for indoor and outdoor applications
- + 230VAC internal non-dimming driver
- High CRI
- IP65 / IK07
- constant current (Single 300mA, Double 500mA)



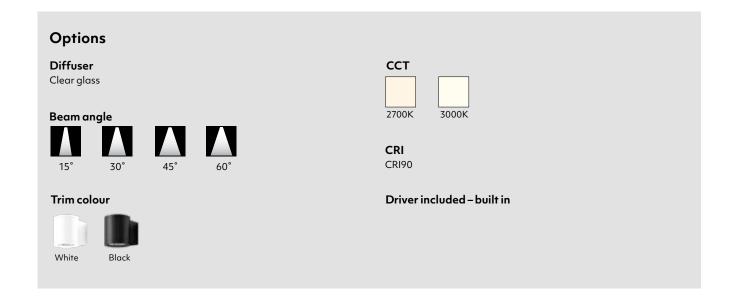

Product information

Example: 3000K

Contact Switch Lighting for data of other variants

Model	System power (W)	Delivered lumens (lm)			
SSUD510F	6.3	450			
SSUD520F	11.1	740 (370x2)			

SSUD510F Single








SSUD520F Double

Size 106x80x90mm

Size 106x80x138mm

how to specify sLED Wall Light

Please confirm model option availability from our website.



e.g. code - 53003101-5300-W							
Model	-	Beam	сст	Pure Colour	-	Trim Colour	
SSUD510F = Single		15 = 15° 30 = 30° 45 = 45° 60 = 60°	27 = 2700K 30 = 3000K	P = CRI 90		W = White B = Black	

e.g. code = SSUD520F-306030P-W

Model	-	Beam 1	Beam 2	ССТ	Pure Colour	-	Trim Colour
SSUD520F = Double		15 = 15° 30 = 30° 45 = 45° 60 = 60°		27 = 2700K 30 = 3000K	P = CRI 90		W = White B = Black

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.









