


# ZELA Fixed 1 décor



Wanaka private residence  
My Local Electrician

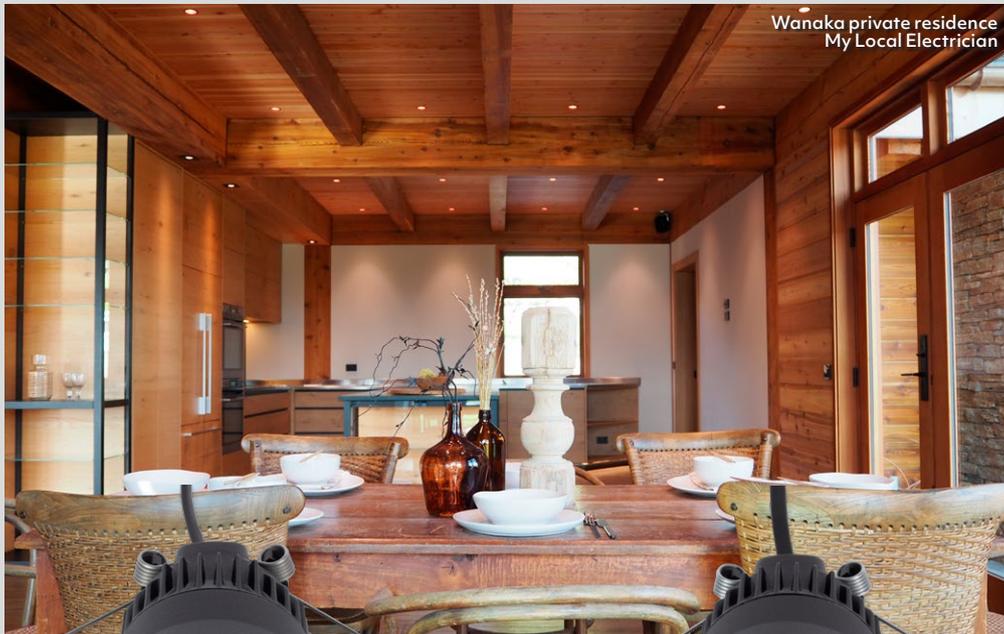

**SLDL284F**  
Beam 9°, 15°, 20°



**SLDL280F**  
Beam 30°, 40°



Black inner  
Textured Black  
BB



Gold inner  
Textured Black  
AB



Bronze inner  
Textured Black  
DB



Copper inner  
Textured Black  
CB



White inner  
Textured Black  
WB



Black inner  
Textured White  
BW



Gold inner  
Textured White  
AW



Bronze inner  
Textured White  
DW




Copper inner  
Textured White  
CW



White inner  
Textured White  
WW


# ZELA décor Fixed 1

- + create artistic ambiance & visual intrigue
- + feature lighting
- + deep recessed for low glare
- + attractive colour options for inner
- + IP65 front
- + constant current




## Options

### Beam angle

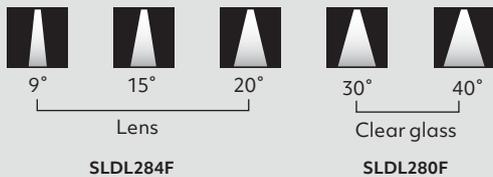


### CCT

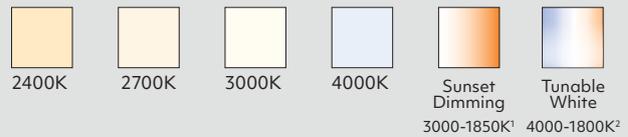

<sup>1</sup> Sunset Dimming is available in 30° and 40° in Professional series.

<sup>2</sup> Tunable White is available in 20°, 30° and 40° in Art series.

### Trim colour



### Inner colour



\*Our copper variant is true copper and may contain small natural flaws. Over time, it will develop verdigris, darkening in colour to a variety of rich tones. This process will be slower in areas where the fitting is not exposed to moisture.

### CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

### Driver included – to be specified

Phase cut Dimming  
DALI 2 Tunable White  
DALI 2 Dimming  
SLiC Casambi Tunable White  
SLiC Casambi Dimming

## Product information

**Example:** White, prismatic, 40°, 3000K, CRI 90, phase cut driver  
Contact Switch Lighting for data of other variants

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
100	4.3	310	IC-F	IC-4	✓
150	6.4	440	IC-F	IC-4	✓
180	7.7	510	IC-F	IC-4	✓
220	9.4	600	CA135	CA90	✓
260	11.1	680	Do not cover		



\* Specification is for ceiling material ≤ 13mm with a phase cut driver. Required clearance to install driver through Ø52 cut-out.

## how to specify ZELA décor Fixed 1

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = **SLDL280F-4030P-DWD15**

Model	Beam	CCT	CRI	Colour - Inner / Trim	Driver	Market	
SLDL284F = Lens	09 = 9° 15 = 15° 20 = 20°	24 = 2400K 27 = 2700K 30 = 3000K 40 = 4000K	P = 90-94 A = 95-98	AW = Gold / White BW = Black / White CW = Copper / White DW = Bronze / White WW = White / White AB = Gold / Black BB = Black / Black DB = Bronze / Black CB = Copper / Black WB = White / Black	<b>Phase cut Dimming</b> D08 = 100mA (4.3W) D09 = 150mA (6.4W) D15 = 180mA (7.7W) D10 = 220mA (9.4W) D11 = 260mA (11.1W) <b>DALI 2 Tunable White</b> D42 = 180mA (8.3W) D43 = 230mA (10.1W) D44 = 260mA (11.9W)	<b>DALI 2 Dimming</b> D02 = 180mA (8.3W) D03 = 230mA (10.1W) D04 = 260mA (11.9W) <b>SLiC Casambi Tunable White</b> D52 = 180mA (8.2W) <b>SLiC Casambi Dimming</b> D57 = 180mA (7.7W) <b>Check online for other driver options.</b>	<ul style="list-style-type: none"> <li>■ = NZ</li> <li>1 = Aust</li> <li>2 = UK</li> <li>3 = EU</li> </ul>
<b>SLDL280F</b> = Clear glass	30 = 30° 40 = 40°	SD = Sunset Dimming S2 = Tunable White					

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for full specifications, lux levels, SDoCs, ies files and installation instructions.



**Warranty**  
7yr Luminaire  
5yr Driver

L70 (60,000 h)

