ZELA Fixed 1
décor

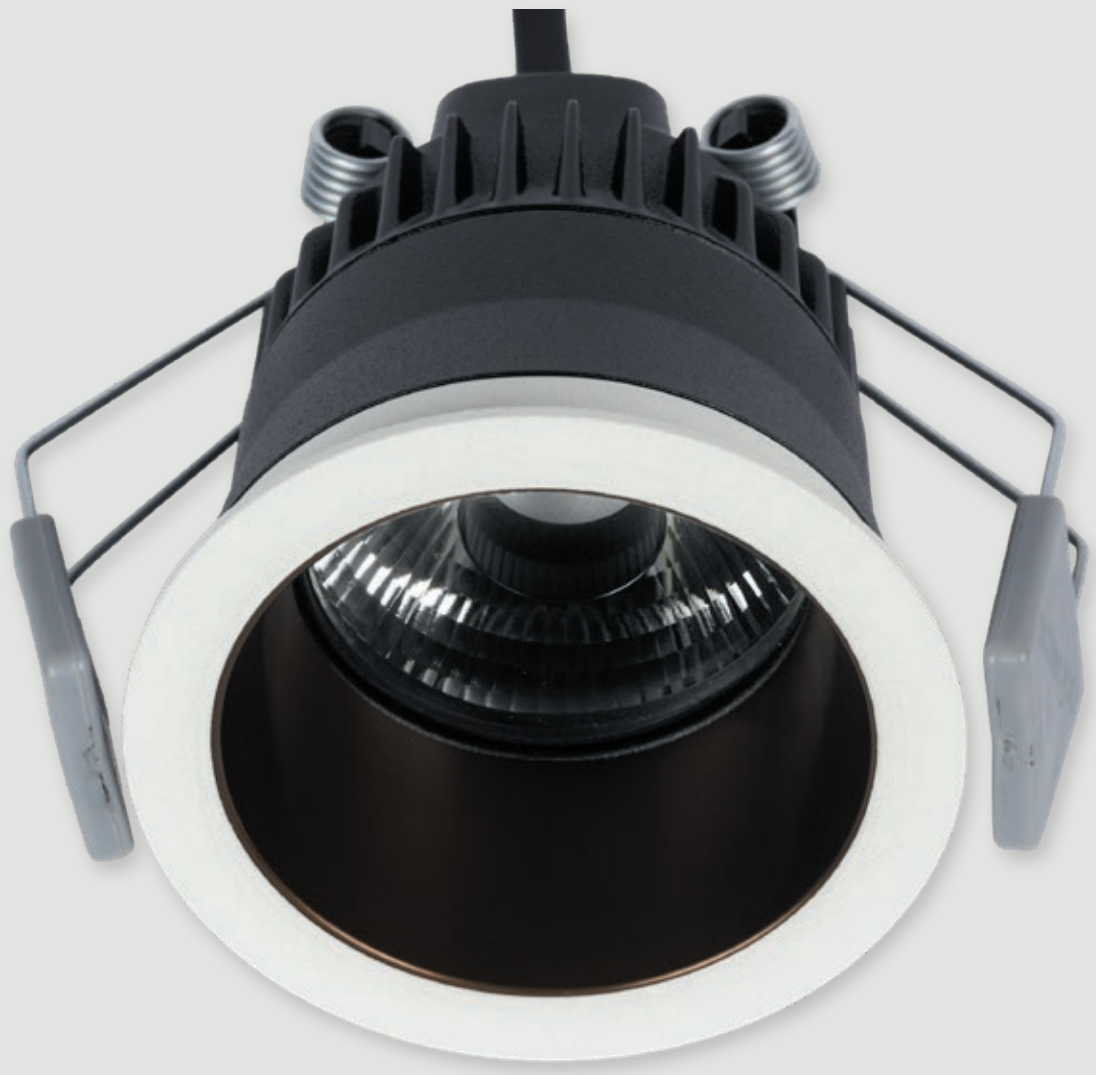

SLDL284F
Beam 9°, 15°, 20°

Feature lighting

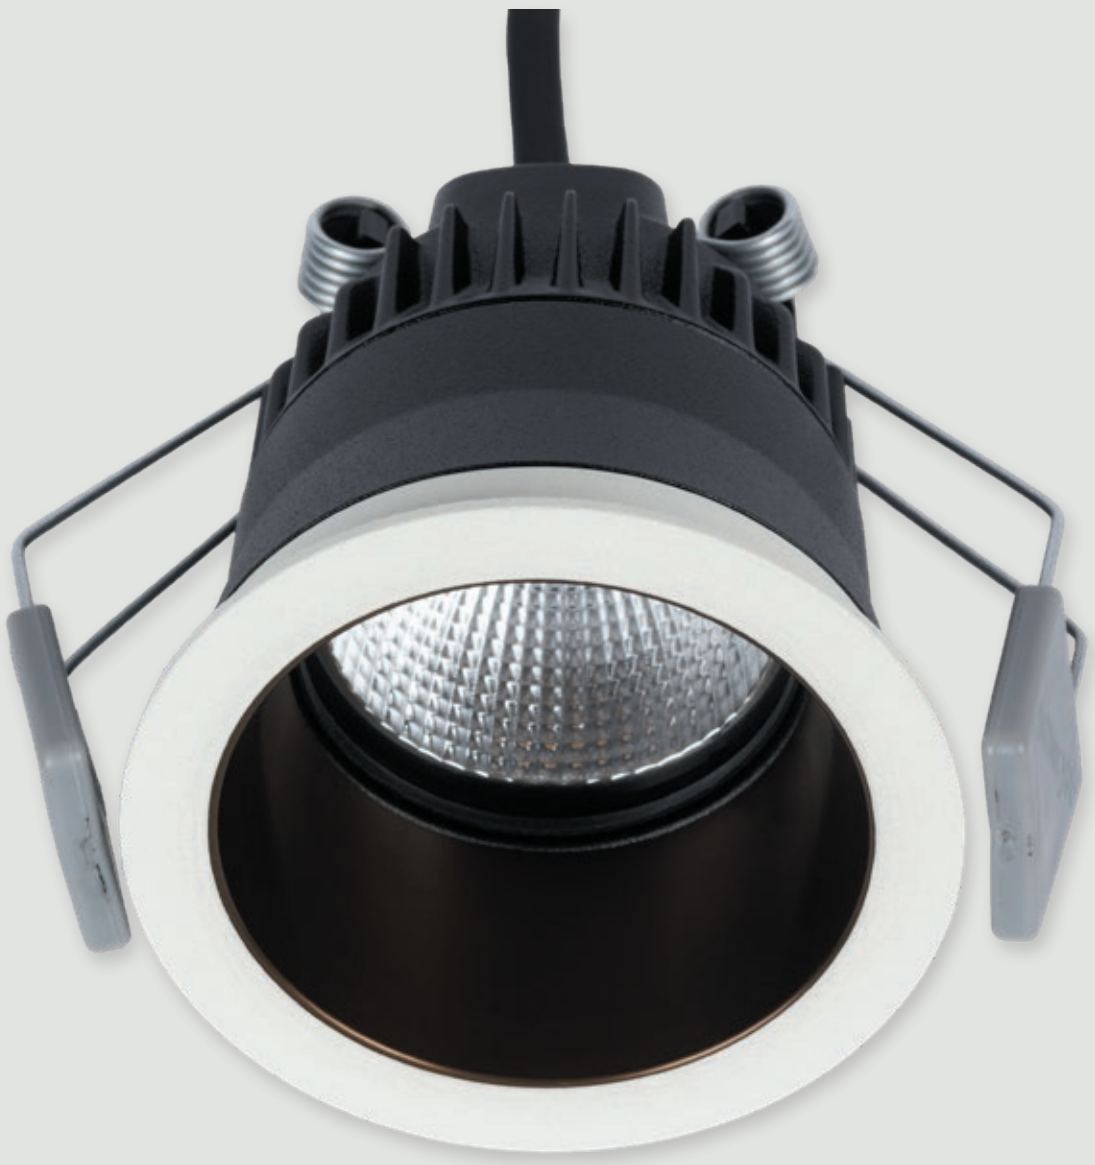

SLDL280F
Beam 30°, 40°

Feature lighting

Black inner
Textured black

Copper inner
Textured black



Gold inner
Textured black



Bronze inner
Textured black

Black inner
Textured white

Copper inner
Textured white

Gold inner
Textured white

Bronze inner
Textured white

PURE COLOUR
HIGH CRI DOWNLIGHTS

Tunable White

Sunset Dimming

ZELA décor Fixed 1

- recessed for low glare
- annodised inner with colour options
- pure copper option for inner
- excellent beam designs
- IP65 front



Options

Beam angle

9° 15° 20°
Lens
SLDL284F

30° 40°
Clear glass
SLDL280F

CCT

2400K	2700K	3000K	4000K	Sunset Dimming	Tunable White
				3000K-1850K	1850K-4000K

CRI

Professional series (P) CRI 90-94

Art series (A) CRI 95–98

Trim colour

Textured white
RAL 9016

Textured black
B104

Inner colour

Annodised black
Annodised gold
Pure copper
Annodised bronze

Driver

Phase cut dim (standard)
0-10V, 1-10V, DALI
Casambi compatible
Tunable-white enabled

Product information*

(example: Clear glass, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable NZ	AU	UK/EU
100	4.3	310	IC-F	IC-4	√
150	6.4	440	IC-F	IC-4	√
180	7.7	510	IC-F	IC-4	√
220	9.4	600	CA135	CA90	√
260	11.1	680	Do not cover		

*Lumens are for black trim with gold inner.
Results with other combinations may vary slightly.

Size	Cut-out	Hole depth	Front
65x67mm	Ø57mm	>70mm**	IP65

**Specification is for ceiling material ≤ 13mm with a phase cut driver.

how to specify ZELA décor Fixed 1

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = SLDL280F-4030P-CWD15

Model	–	Beam	CCT	CRI	–	Colour - Inner / Trim	Driver – Phase cut*	–	Market
SLDL284F = Lens		09 = 9°	24 = 2400K	P = 90-94		AW = gold / textured white	D08 = 100mA (4.3W)		🟨 = NZ
		15 = 15°	27 = 2700K	A = 95-98		BW = black / textured white	D09 = 150mA (6.4W)		1 = Aust
		20 = 20°	30 = 3000K			CW = copper / textured white	D15 = 180mA (7.7W)		2 = UK
			40 = 4000K			DW = bronze / textured white	D10 = 220mA (9.4W)		3 = EU
SLDL280F = Clear glass		30 = 30°	SD = Sunset Dimming			AB = gold / textured black	D11 = 260mA (11.1W)		
		40 = 40°	S2 = Tunable White*			BB = black / textured black			
						CB = copper / textured black			
						DB = bronze / textured black			

*Check online for driver options.

Please see **www.switch-lighting.co.nz** for full specifications, lux levels, SDoCs, ies files and installation instructions.

Warranty
7yr Luminaire
5yr Driver

L70 (60,000 h)