

# ZELA Surface Mount Fixed 1

décor



Gold inner



Copper inner



Bronze inner



White inner



Black inner



These inners can be combined with Textured Black or Textured White trims

**SLSM101F**  
Beam 40° 55°



**SLSM104F**  
Lens  
Beam 9° 15° 20°  
Spot lighting



**SLSM103F**  
Opaque  
Beam 90°  
Wide angle lighting



**SLSM106F**  
Honeycomb  
Beam 30° 40°  
Anti-glare lighting




**SLSM100F**  
Clear glass  
Beam 40° 55°  
Task | General lighting



**SLSM101F**  
Prismatic  
Beam 40° 55°  
General | Task lighting

# ZELA décor Surface Mount Fixed 1


- + a captivating and eye-catching design, recessed for low glare
- + attractive colour options for inner
- + IP20
- + constant current

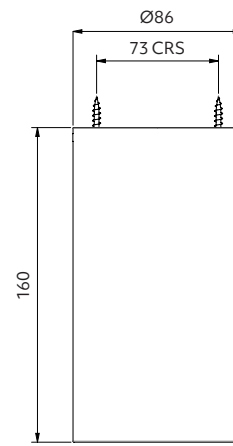


Scan to view website

## Options

### Beam angle

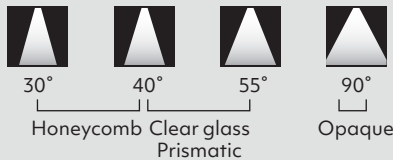


### Trim colour



### Inner colour



### CCT

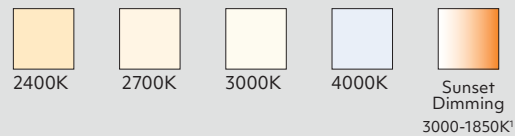

<sup>1</sup>Sunset Dimming is available in 30°, 40° and 55° in Professional series.

### CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

### Driver included – to be specified

Phase cut Dimming  
DALI 2 Tunable White  
DALI 2 Dimming  
SLiC Casambi Tunable White  
SLiC Casambi Dimming



9-36VDC input options available  
Scan the QR code for low voltage driver options

## Product information

**Table is based on:** White, clear glass, 40°, 3000K, CRI 90, phase cut driver  
Contact Switch Lighting for data of other variants

Driver (mA)	Power (W)	Delivered lumens (lm)
150	6.4	580
260	11.1	900



Size  
86x160mm

## How to specify ZELA décor Surface Mount Fixed 1

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = **SLSM101F-4030P-BWD45**

Model	Beam	CCT	CRI	Colour - Inner / Trim	Driver - Phase cut	Market
SLSM104F = Lens	09 = 9° 15 = 15° 20 = 20°	24 = 2400K 27 = 2700K <b>30</b> = 3000K 40 = 4000K SD = Sunset Dimming	<b>P</b> = 90-94 A = 95-98	AW = Gold / White <b>BW</b> = Black / White CW = Copper / White DW = Bronze / White WW = White / White AB = Gold / Black BB = Black / Black CB = Copper / Black DB = Bronze / Black WB = White / Black	<b>D45</b> = 150mA (6.4W) D46 = 260mA (11.1W)  <b>Contact Switch Lighting for other options</b>	<b>I</b> = NZ 1 = Aust 2 = UK 3 = EU
SLSM106F = Honeycomb	30 = 30° 40 = 40°					
SLSM100F = Clear glass <b>SLSM101F</b> = Prismatic	<b>40</b> = 40° 55 = 55°					
SLSM103F = Opaque	90 = 90°					

Please see [www.switch-lighting.co.nz](http://www.switch-lighting.co.nz) for full specifications, lux levels, SDoCs, ies files and installation instructions.



**Warranty**  
7yr Luminaire  
5yr Driver

L70 (60,000 h)

