


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | | Eff: 72.15 lm/W |
|-------------------|---------|-----------------------|--------|--------------------|--|-----------------|
| MODEL | | I _{max} (cd) | 9795 | S/MH (C0/180) | | 0.23 |
| NOMINAL POWER (W) | | LOR (%) | 100.0 | S/MH (C90/270) | | 0.25 |
| RATED VOLTAGE (V) | 230V | TOTAL FLUX (lm) | 699.83 | η UP,DN (C0-180) | | 0.0,43.1 |
| NOMINAL FLUX (lm) | 699.832 | CIE CLASS | DIRECT | η UP,DN (C180-360) | | 0.0,56.9 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | | 0.00 |
| TEST VOLTAGE (V) | | η down (%) | 100.0 | CIBSE SHR MAX | | 1.00 |

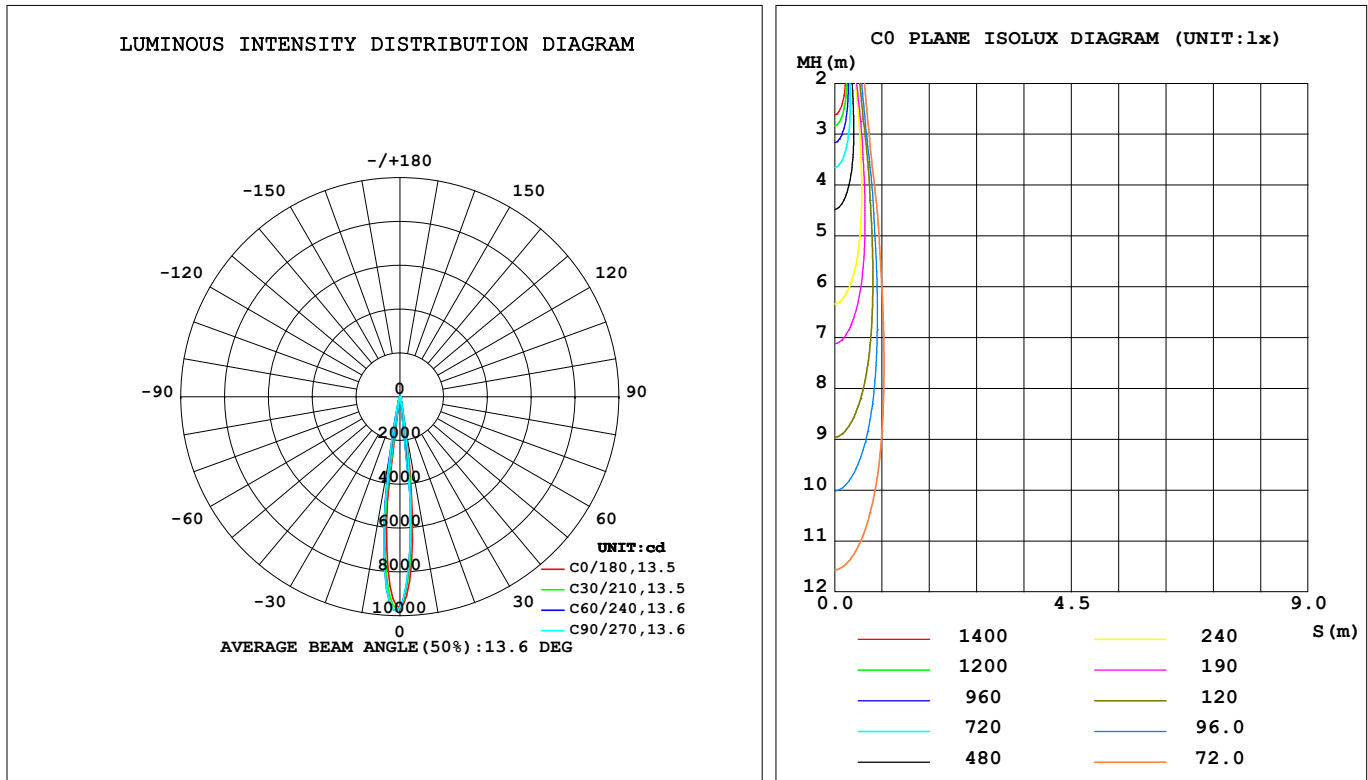

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|----------|-----------------------|--------|--------|--------|--------|--------|--------|--------|----------|-------------|--------------|-----------|
| 10 | 1632 | 1204 | 1167 | 1334 | 1769 | 2409 | 2550 | 2162 | 0- 10 | 473.0 | 473.0 | 67.6,67.6 |
| 20 | 174.3 | 169.4 | 170.9 | 177.7 | 187.0 | 212.6 | 219.9 | 203.6 | 10- 20 | 145.2 | 618.2 | 88.3,88.3 |
| 30 | 49.38 | 47.12 | 47.38 | 47.73 | 50.60 | 55.63 | 56.45 | 53.54 | 20- 30 | 46.75 | 665.0 | 95,95 |
| 40 | 17.21 | 16.80 | 17.00 | 16.78 | 17.44 | 19.53 | 20.13 | 18.90 | 30- 40 | 18.97 | 683.9 | 97.7,97.7 |
| 50 | 6.266 | 6.296 | 6.218 | 6.099 | 6.442 | 7.139 | 7.055 | 6.572 | 40- 50 | 8.341 | 692.3 | 98.9,98.9 |
| 60 | 3.280 | 3.235 | 3.235 | 3.161 | 3.192 | 3.430 | 3.374 | 3.361 | 50- 60 | 4.022 | 696.3 | 99.5,99.5 |
| 70 | 1.748 | 1.605 | 1.692 | 1.776 | 1.809 | 1.915 | 1.903 | 1.799 | 60- 70 | 2.643 | 698.9 | 99.9,99.9 |
| 80 | 0.1486 | 0.1239 | 0.1191 | 0.1275 | 0.1140 | 0.1261 | 0.1444 | 0.1332 | 70- 80 | 0.8249 | 699.8 | 100,100 |
| 90 | 0.0014 | 0 | 0.0022 | 0 | 0.0058 | 0.0011 | 0.0051 | 0 | 80- 90 | 0.0591 | 699.8 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

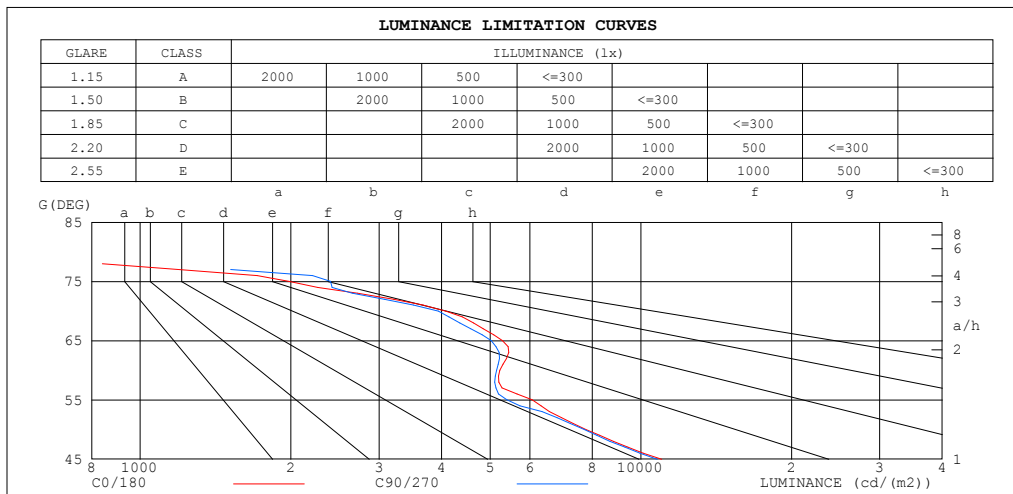

| LUMINANCE cd/(m2) | | |
|-------------------|--------|---------|
| G (DEG) | C0/180 | C90/270 |
| 85 | 612 | 515 |
| 80 | 682 | 547 |
| 75 | 1982 | 2402 |
| 70 | 4076 | 3942 |
| 65 | 5294 | 5025 |
| 60 | 5231 | 5156 |
| 55 | 6065 | 5401 |
| 50 | 7772 | 7708 |
| 45 | 11010 | 10787 |


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | | | | | | | | | | |

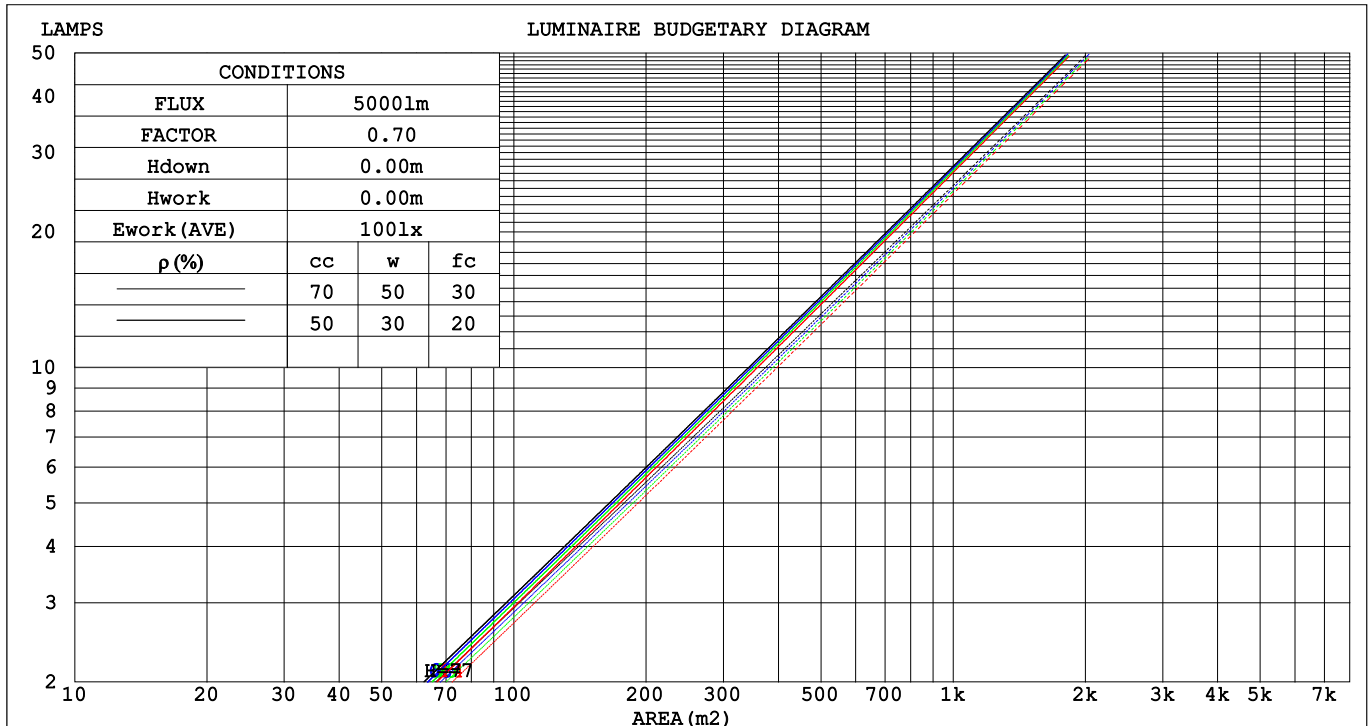

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

WEC AND CCEC

| | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|-------|--|--|--|--|--|------------------|--|--|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | | | | | | | | | | | | | | | | |
| NAME: SLDL234T-1530P-TWD11 | | | | | | | | | TYPE: | | | | | | WEIGHT: | | |
| SPEC.: | | | | | | | | | DIM.: | | | | | | SERIAL No.: | | |
| MFR.: Switch Lighting | | | | | | | | | SUR.: | | | | | | Shielding Angle: | | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .118 | .067 | .021 | .111 | .063 | .020 | .099 | .057 | .018 | .088 | .051 | .016 | .077 | .045 | .014 | |
| 2.0 | .107 | .059 | .018 | .102 | .056 | .017 | .092 | .051 | .016 | .083 | .046 | .015 | .074 | .042 | .013 | |
| 3.0 | .098 | .052 | .016 | .094 | .050 | .015 | .086 | .046 | .014 | .078 | .043 | .013 | .071 | .039 | .012 | |
| 4.0 | .091 | .047 | .014 | .087 | .046 | .013 | .080 | .043 | .013 | .074 | .040 | .012 | .068 | .037 | .011 | |
| 5.0 | .084 | .043 | .012 | .081 | .042 | .012 | .075 | .039 | .012 | .070 | .037 | .011 | .065 | .035 | .010 | |
| 6.0 | .078 | .039 | .011 | .076 | .038 | .011 | .071 | .036 | .011 | .066 | .034 | .010 | .062 | .033 | .010 | |
| 7.0 | .073 | .036 | .010 | .071 | .035 | .010 | .067 | .034 | .010 | .063 | .032 | .009 | .059 | .031 | .009 | |
| 8.0 | .069 | .034 | .009 | .067 | .033 | .009 | .064 | .032 | .009 | .060 | .030 | .009 | .057 | .029 | .009 | |
| 9.0 | .065 | .032 | .009 | .064 | .031 | .009 | .060 | .030 | .008 | .057 | .029 | .008 | .055 | .028 | .008 | |
| 10.0 | .062 | .030 | .008 | .060 | .029 | .008 | .058 | .028 | .008 | .055 | .027 | .008 | .053 | .026 | .008 | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients (CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .167 | .158 | .150 | .143 | .135 | .129 | .098 | .093 | .089 | .056 | .054 | .052 | .018 | .017 | .017 | |
| 2.0 | .148 | .133 | .120 | .126 | .114 | .104 | .087 | .079 | .073 | .050 | .046 | .043 | .016 | .015 | .014 | |
| 3.0 | .131 | .113 | .099 | .113 | .098 | .085 | .077 | .068 | .060 | .045 | .040 | .035 | .014 | .013 | .012 | |
| 4.0 | .118 | .097 | .082 | .101 | .084 | .071 | .070 | .059 | .050 | .040 | .034 | .030 | .013 | .011 | .010 | |
| 5.0 | .106 | .085 | .069 | .091 | .073 | .060 | .063 | .051 | .042 | .036 | .030 | .025 | .012 | .010 | .008 | |
| 6.0 | .096 | .074 | .059 | .083 | .064 | .051 | .057 | .045 | .036 | .033 | .027 | .021 | .011 | .009 | .007 | |
| 7.0 | .088 | .066 | .050 | .076 | .057 | .044 | .052 | .040 | .031 | .030 | .024 | .018 | .010 | .008 | .006 | |
| 8.0 | .081 | .059 | .044 | .070 | .051 | .038 | .048 | .036 | .027 | .028 | .021 | .016 | .009 | .007 | .005 | |
| 9.0 | .075 | .053 | .038 | .064 | .046 | .033 | .045 | .032 | .024 | .026 | .019 | .014 | .008 | .006 | .005 | |
| 10.0 | .069 | .048 | .033 | .060 | .041 | .029 | .041 | .029 | .021 | .024 | .017 | .012 | .008 | .006 | .004 | |

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

| | | | | | | | | | | | |
|--|--------|------------------|------|------|-------|------|----------------|------------------|------|------|------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | | | | | | | | | | |
| NAME: SLDL234T-1530P-TWD11 | | | | | TYPE: | | | WEIGHT: | | | |
| SPEC.: | | | | | DIM.: | | | SERIAL No.: | | | |
| MFR.: Switch Lighting | | | | | SUR.: | | | Shielding Angle: | | | |
| | | | | | | | | | | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H | y = 2H | 11.4 | 11.9 | 11.6 | 12.1 | 12.2 | 11.4 | 11.9 | 11.6 | 12.0 | 12.2 |
| | 3H | 11.9 | 12.4 | 12.1 | 12.6 | 12.8 | 11.9 | 12.3 | 12.1 | 12.5 | 12.7 |
| | 4H | 12.0 | 12.4 | 12.2 | 12.6 | 12.8 | 11.9 | 12.4 | 12.1 | 12.6 | 12.8 |
| | 6H | 11.9 | 12.3 | 12.2 | 12.6 | 12.8 | 11.8 | 12.3 | 12.1 | 12.5 | 12.7 |
| | 8H | 11.8 | 12.3 | 12.1 | 12.5 | 12.8 | 11.8 | 12.2 | 12.1 | 12.5 | 12.7 |
| | 12H | 11.8 | 12.2 | 12.1 | 12.5 | 12.7 | 11.8 | 12.2 | 12.1 | 12.4 | 12.7 |
| 4H | 2H | 11.6 | 12.1 | 11.8 | 12.3 | 12.5 | 11.6 | 12.0 | 11.8 | 12.2 | 12.4 |
| | 3H | 12.2 | 12.6 | 12.5 | 12.8 | 13.1 | 12.1 | 12.5 | 12.4 | 12.8 | 13.0 |
| | 4H | 12.2 | 12.6 | 12.5 | 12.9 | 13.2 | 12.1 | 12.5 | 12.5 | 12.8 | 13.1 |
| | 6H | 12.1 | 12.4 | 12.5 | 12.8 | 13.1 | 12.1 | 12.4 | 12.4 | 12.7 | 13.1 |
| | 8H | 12.0 | 12.4 | 12.4 | 12.7 | 13.1 | 12.0 | 12.3 | 12.4 | 12.7 | 13.0 |
| | 12H | 12.0 | 12.3 | 12.4 | 12.7 | 13.0 | 12.0 | 12.3 | 12.4 | 12.6 | 13.0 |
| 8H | 4H | 12.1 | 12.4 | 12.5 | 12.8 | 13.1 | 12.0 | 12.4 | 12.4 | 12.7 | 13.1 |
| | 6H | 12.0 | 12.3 | 12.4 | 12.7 | 13.1 | 12.0 | 12.2 | 12.4 | 12.6 | 13.0 |
| | 8H | 11.9 | 12.2 | 12.4 | 12.6 | 13.0 | 11.9 | 12.1 | 12.3 | 12.6 | 13.0 |
| | 12H | 11.9 | 12.1 | 12.3 | 12.5 | 13.0 | 11.8 | 12.0 | 12.3 | 12.5 | 12.9 |
| 12H | 4H | 12.0 | 12.3 | 12.4 | 12.7 | 13.1 | 12.0 | 12.3 | 12.4 | 12.7 | 13.0 |
| | 6H | 11.9 | 12.2 | 12.4 | 12.6 | 13.0 | 11.9 | 12.1 | 12.3 | 12.5 | 13.0 |
| | 8H | 11.9 | 12.1 | 12.3 | 12.5 | 13.0 | 11.8 | 12.0 | 12.3 | 12.5 | 12.9 |
| Variations with the observer position at spacings: | | | | | | | | | | | |
| S = 1.0H | | + 1.5 / - 2.1 | | | | | + 1.6 / - 2.2 | | | | |
| 1.5H | | + 2.6 / - 2.1 | | | | | + 2.6 / - 1.7 | | | | |
| 2.0H | | + 2.3 / - 1.3 | | | | | + 2.1 / - 1.4 | | | | |

CIE Pub.117, 699.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |


| REFLECTANCE | | | | | | | | | | |
|----------------------------------|--|-----|-----------|-----|-----|-----|-----|---------------|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 90 | 84 | 81 | 90 | 84 | 81 | 89 | 84 | 81 | 77 |
| 0.80 | 97 | 92 | 88 | 97 | 92 | 88 | 95 | 91 | 88 | 85 |
| 1.00 | 101 | 96 | 93 | 100 | 96 | 92 | 99 | 95 | 92 | 88 |
| 1.25 | 105 | 100 | 97 | 104 | 99 | 96 | 102 | 98 | 96 | 92 |
| 1.50 | 107 | 103 | 100 | 106 | 102 | 99 | 104 | 101 | 98 | 94 |
| 2.00 | 109 | 106 | 103 | 108 | 105 | 102 | 105 | 103 | 100 | 95 |
| 2.50 | 111 | 108 | 105 | 109 | 106 | 104 | 106 | 104 | 102 | 96 |
| 3.00 | 112 | 109 | 107 | 111 | 108 | 106 | 107 | 105 | 103 | 97 |
| 4.00 | 114 | 112 | 110 | 112 | 110 | 108 | 109 | 107 | 106 | 99 |
| 5.00 | 116 | 113 | 112 | 113 | 112 | 110 | 110 | 108 | 107 | 100 |
| ROOM INDEX | UF(total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | Suspended | | | | | SHRNOM = 1.25 | | |

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

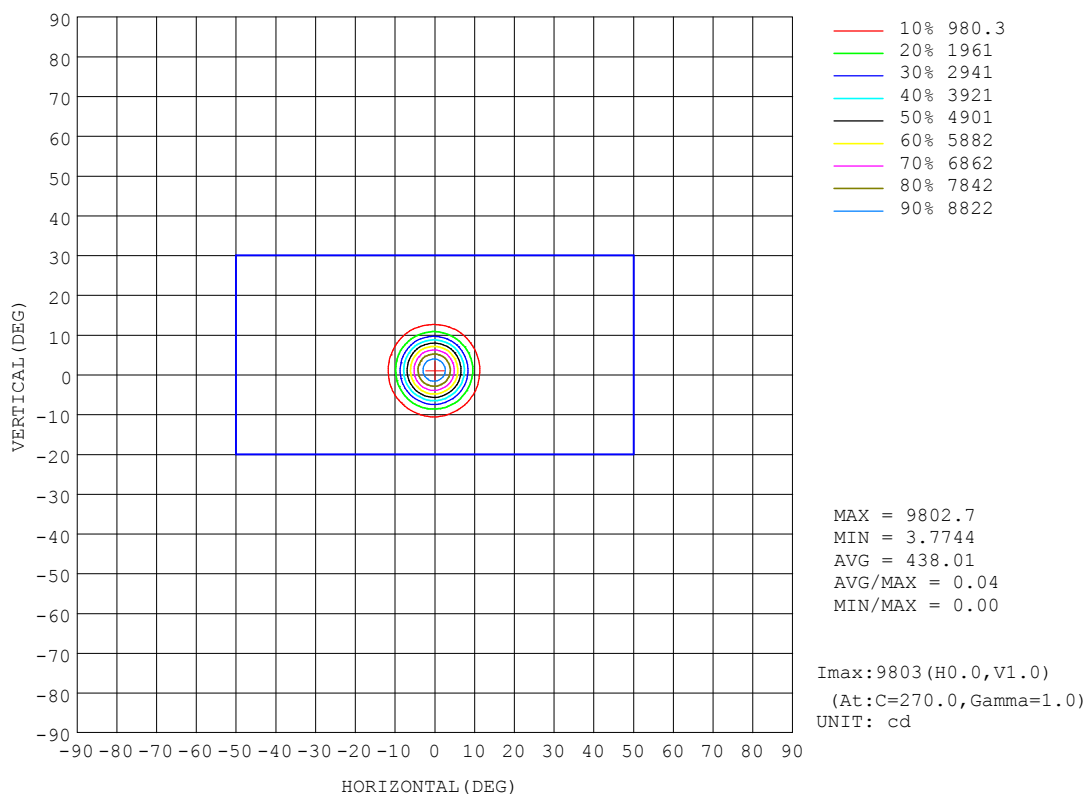


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

AAI Figure

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

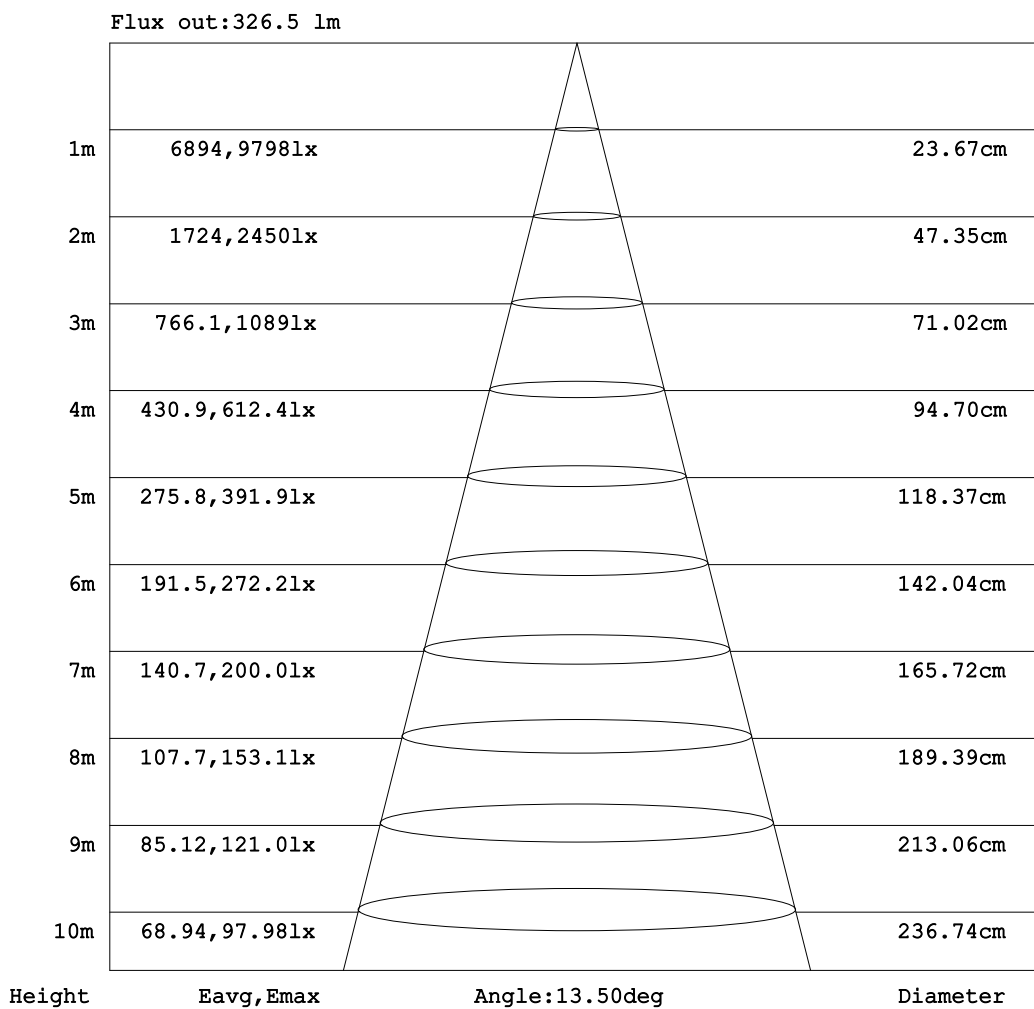


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |

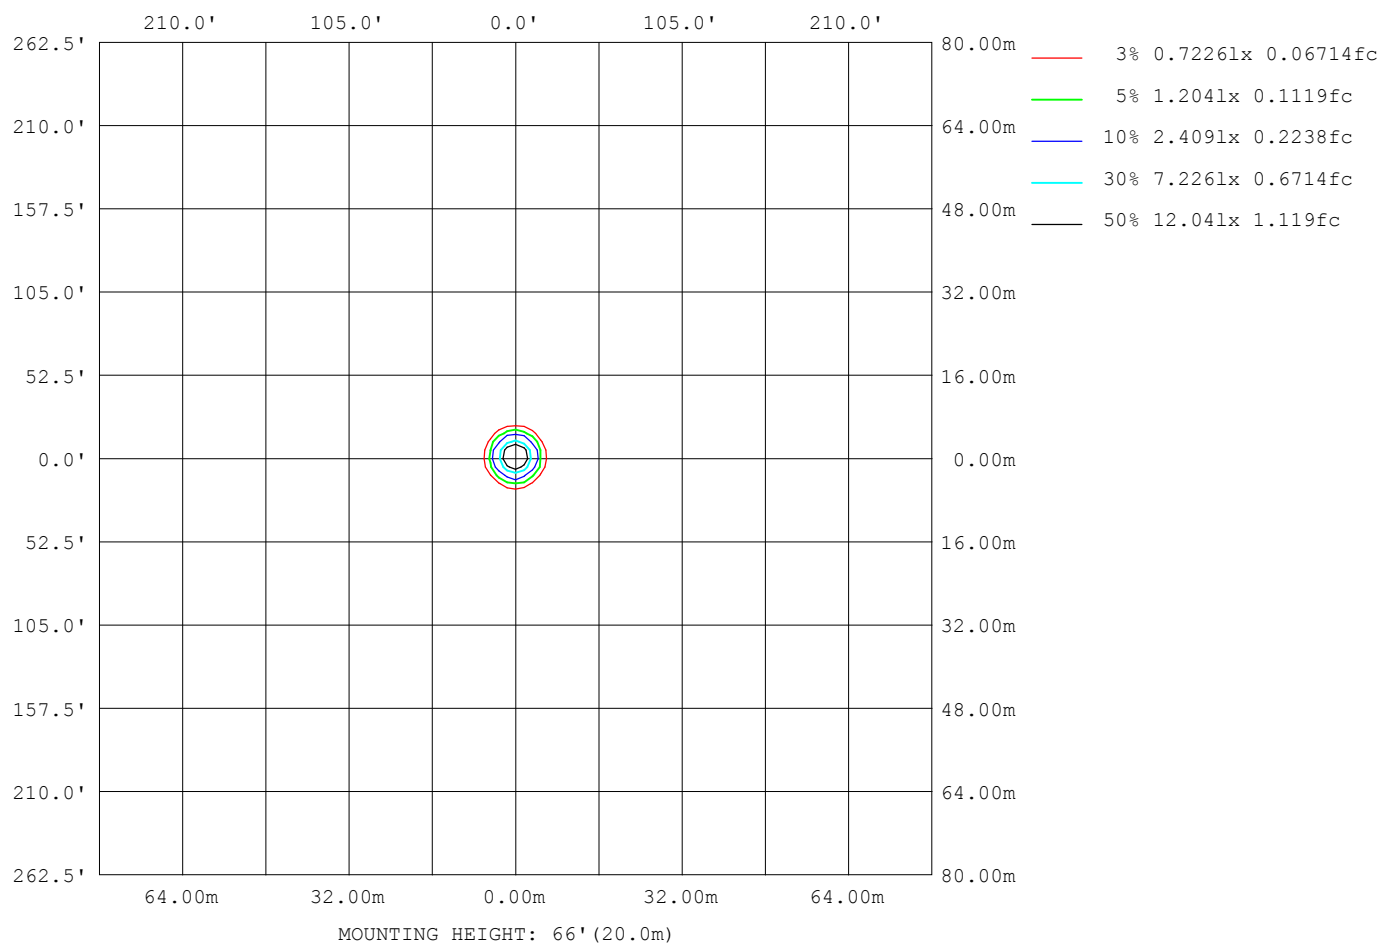

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

LED Avg.L Report

| | | |
|--|-------|------------------|
| Test:U:229.90V I:0.0440A P:9.7000W PF:0.9710 Freq:50.00Hz Lamp Flux:699.832x1 lm | | |
| NAME: SLDL234T-1530P-TWD11 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Switch Lighting | SUR.: | Shielding Angle: |


| AvgL | cd/m2 |
|------------------|-------|
| L_0~180 (65) av | 5234 |
| L_0~180 (75) av | 2214 |
| L_0~180 (85) av | 536 |
| L_90~270 (65) av | 5295 |
| L_90~270 (75) av | 2240 |
| L_90~270 (85) av | 506 |
| L_45 (65) av | 5208 |
| L_45 (75) av | 2188 |
| L_45 (85) av | 497 |

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:09 July 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

Planar Illuminance Curve

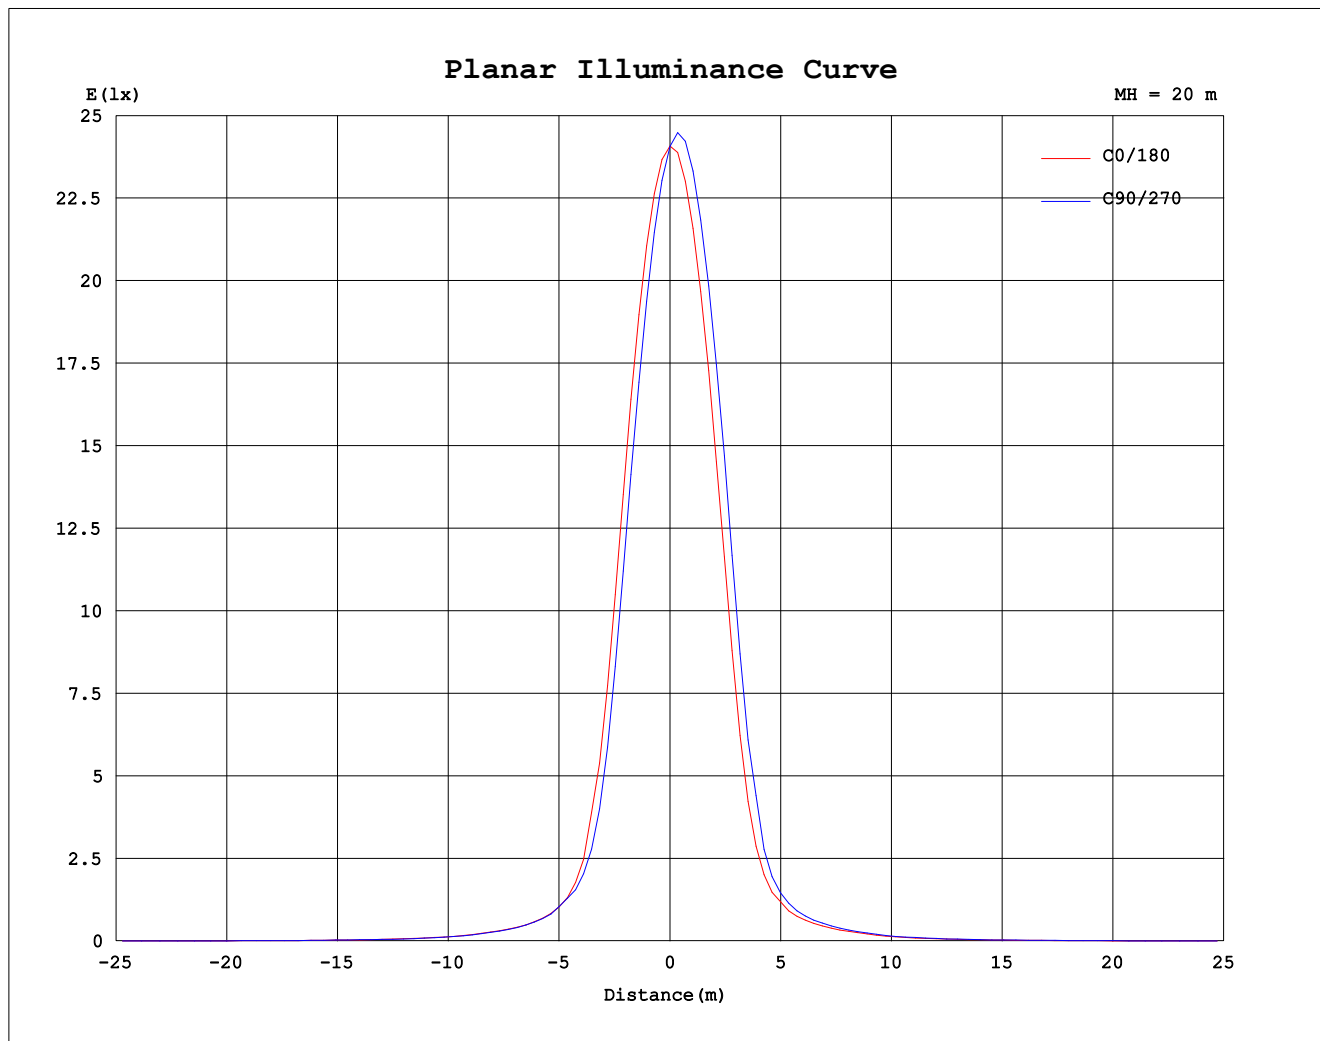

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 09 July 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks:

```