

ZELA *Tilt*



Nelson private residence
Mado Architects | Tasman Sparkies



SLDL214T
Lens
9° 15° 20°

Spot lighting



SLDL216T
Honeycomb
30° 40°

Anti-glare lighting




SLDL212T
ULG clear
40° 55°

Task | General lighting



SLDL211T
Prismatic diffuser
40° 55°

General | Task lighting




SLDL213T
Opaque diffuser
90°

Wide angle lighting

ZELA Tilt

- illuminate with elegance and precision
- general all purpose luminaire
- fully adjustable 360° gimbal
- suitable for indoor use and exterior under soffits
- IP65 front
- constant current

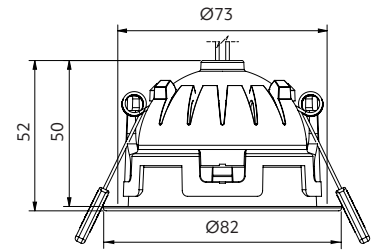


Options

Beam angle



Lens

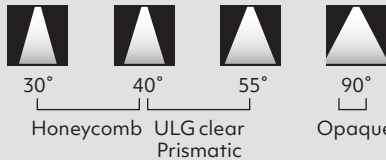

Honeycomb

ULG clear
Prismatic

Opaque

Trim colour



Textured White
RAL 9016

Textured Black
B104

CCT



¹ Sunset Dimming is available in 30°, 40° and 55° in Professional series.

² Tunable White is available in 20°, 30°, 40°, and 55° in Art series.

CRI

Professional series (P) 90-94CRI Art series (A) 95-98CRI

Use with

ZELA adapter plates for retrofit installations

Driver included – to be specified

Phase cut Dimming
DALI 2 Tunable White
DALI 2 Dimming
SLiC Casambi Tunable White
SLiC Casambi Dimming

Product information

Example: White, prismatic, 40°, 3000K, CRI 90, phase cut driver
Contact Switch Lighting for data of other variants

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
100	4.3	420	IC-F	IC-4	✓
150	6.4	590	IC-F	IC-4	✓
180	7.7	690	IC-F	IC-4	✓
220	9.4	810	IC-F	IC-4	✓
260	11.1	910	CA135	CA90	✓



Tilt Angle
28°



Size
82x50mm



Cut-out
Ø73mm



Hole depth
>67mm*




Front

*Specification is for ceiling material ≤ 13mm with a phase cut driver.

how to specify ZELA Tilt

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = **SLDL211T-4030P-TWD10**

Model	Beam	CCT	CRI	Trim Colour	Driver	Market	
SLDL214T = Lens	09 = 9° 15 = 15° 20 = 20°	24 = 2400K 27 = 2700K 30 = 3000K 40 = 4000K	P = 90-94 A = 95-98	TW = Textured White TB = Textured Black	Phase cut Dimming D08 = 100mA (4.3W) D09 = 150mA (6.4W) D15 = 180mA (7.7W) D10 = 220mA (9.4W) D11 = 260mA (11.1W) DALI 2 Tunable White D42 = 180mA (8.3W) D43 = 230mA (10.1W) D44 = 260mA (11.9W)	DALI 2 Dimming D02 = 180mA (8.3W) D03 = 230mA (10.1W) D04 = 260mA (11.9W) SLiC Casambi Tunable White D52 = 180mA (8.2W) SLiC Casambi Dimming D57 = 180mA (7.7W) D58 = 220mA (9.4W) Check online for other driver options.	 = NZ 1 = Aust 2 = UK 3 = EU
SLDL216T = Honeycomb	30 = 30° 40 = 40°	SD = Sunset Dimming S2 = Tunable White					
SLDL212T = ULG clear glass SLDL211T = Prismatic	40 = 40° 55 = 55°						
SLDL213T = Opaque	90 = 90°						

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
7yr Luminaire
5yr Driver

L70 (60,000 h)

