
Multi-LIGHTZ





SL41-EL Constant Voltage SL42-EL Constant Current Matt 316 Stainless Steel

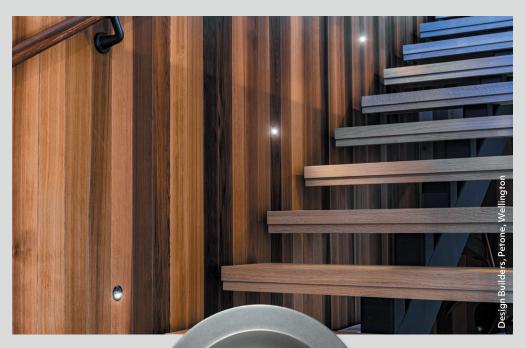

SL41-EL Constant Voltage SL42-EL Constant Current Eyelid

Black 316 Stainless Steel



SL41-EL Constant Voltage SL42-EL Constant Current Eyelid

White 316 Stainless Steel



SL41 Constant Voltage SL42 Constant Current Beam 70°

316 Stainless Steel



SL41 Constant Voltage SL42 Constant Current Beam 90°

Matt 316 Stainless Steel



SL41 Constant Voltage SL42 Constant Current Beam 90°

White 316 Stainless Steel









Multi-LIGHTZ

- ÷ a versatile luminaire to elevate interior & exterior space
- ÷ dimmable constant current
- ÷ use outdoors on steps / paths / deck lighting
- use indoors on stairs / hallways / ambient lighting ÷
- ÷ 316 stainless steel
- ÷ IP67
- ÷ over voltage protection for constant voltage
- ÷ constant voltage (12VDC) / constant current (Max 500mA)



Options



230VAC power supply - constant current (SL42) Ordered separately

Max 500mA

See Tips and Tricks on our website for driver options.

Contact Switch Lighting for Casambi Smart Control options.

2700K 3000K 4000K SL41 / SL41-EL CRI

сст

CRI 80

12VDC power supply - constant voltage (SL41)

Ordered separately Q4-12V-20W (IP20) 1-11 lights in parallel SLDV-12V-40W (IP67) 1-21 lights in parallel SLDV-12V-75W (IP67) 1-45 lights in parallel Higher output power supplies available Please refer online for cable size requirements (voltage drop)



Scan to view driver options

Product information

Example: 2700K Contact Switch Lighting for data of other variants

	Luminaire	Forward	Delivered	Insulation coverable			
Model	power (W)	voltage (V _f)	lumens (lm)	NZ	AU	UK/EU	
SL41 constant voltage (CV)	1.6 (130mA)	11-13	100	IC-F	IC-4	\checkmark	
SL42 constant current (CC)	1.5 (500mA)	3	150	IC-F	IC-4	\checkmark	





Hole depth >40mm

how to specify Multi-LIGHTZ

Please confirm model option availability from our website. Note: driver is ordered separately.

e.g. code = <mark>SL41-70-27-SS</mark>								
Model]-	Beam] -	ССТ]-	Trim Colour]-	Market
<mark>SL41</mark> = Constant voltage SL42 = Constant current		70 = 70° 90 = 90° EL = Eyelid		27 = 2700K 30 = 3000K 40 = 4000K (SL41 / SL41-EL only)		SS= 316 Stainless SteelMS= Matt 316 Stainless SteelB= Black 316 Stainless SteelW= White 316 Stainless Steel		= NZ 1 = Aust 2 = UK 3 = EU

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.









