
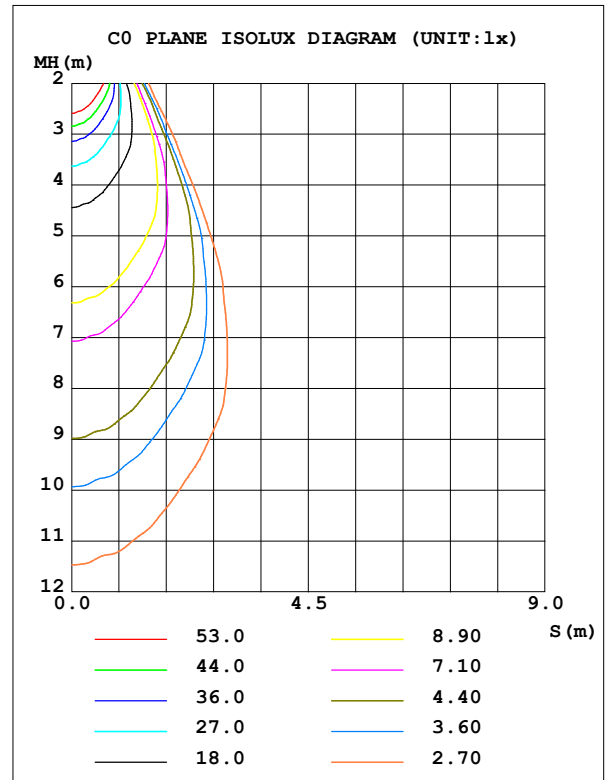


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 57.13 lm/W
MODEL		I _{max} (cd)	637.1	S/MH (C0/180)		0.73
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)		0.33
RATED VOLTAGE (V)		TOTAL FLUX (lm)	365.60	η UP,DN (C0-180)		0.0,86.6
NOMINAL FLUX (lm)	365.602	CIE CLASS	DIRECT	η UP,DN (C180-360)		0.0,13.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.75
TEST VOLTAGE (V)		η down (%)	100.0	CIBSE SHR MAX		0.75

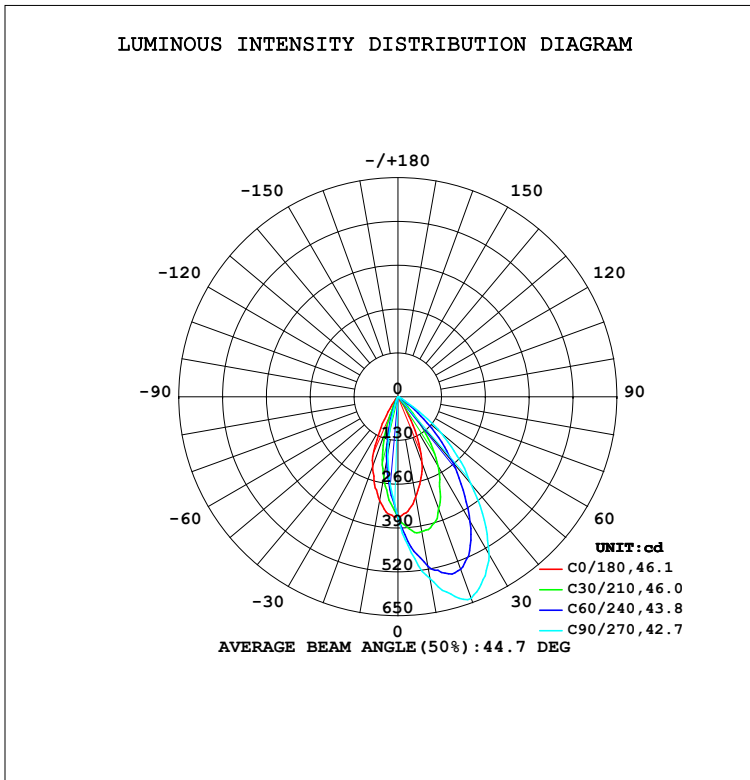

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	303.0	458.3	548.1	466.2	313.4	219.9	177.2	214.5	0- 10	33.38	33.38	9.13,9.13
20	210.8	448.9	636.7	469.9	221.2	76.32	27.82	65.70	10- 20	85.74	119.1	32.6,32.6
30	66.23	334.1	542.1	361.5	93.08	10.16	4.225	8.963	20- 30	101.9	221.0	60.4,60.4
40	10.46	175.1	337.1	195.9	14.19	2.246	1.182	1.631	30- 40	83.10	304.1	83.2,83.2
50	1.765	50.74	167.4	61.94	2.659	0.6399	0.5043	0.5433	40- 50	46.44	350.5	95.9,95.9
60	0.4952	5.895	21.18	6.752	0.5991	0.3292	0.3580	0.3249	50- 60	13.32	363.8	99.5,99.5
70	0.1622	0.3336	0.9269	0.3186	0.1557	0.2428	0.2839	0.2412	60- 70	1.537	365.4	99.9,99.9
80	0.0773	0.0514	0.0446	0.0515	0.0728	0.1402	0.1826	0.1371	70- 80	0.1676	365.6	100,100
90	0	0	0	0	0	0.0015	0.0058	0	80- 90	0.0502	365.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

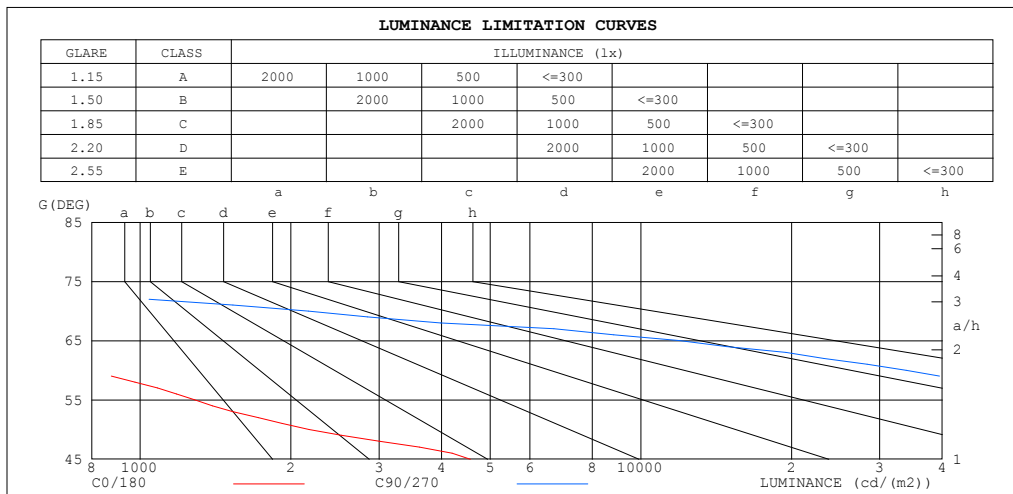

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	326	152
80	353	206
75	375	269
70	376	2169
65	411	11941
60	784	33902
55	1285	109397
50	2175	208506
45	4569	281039


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

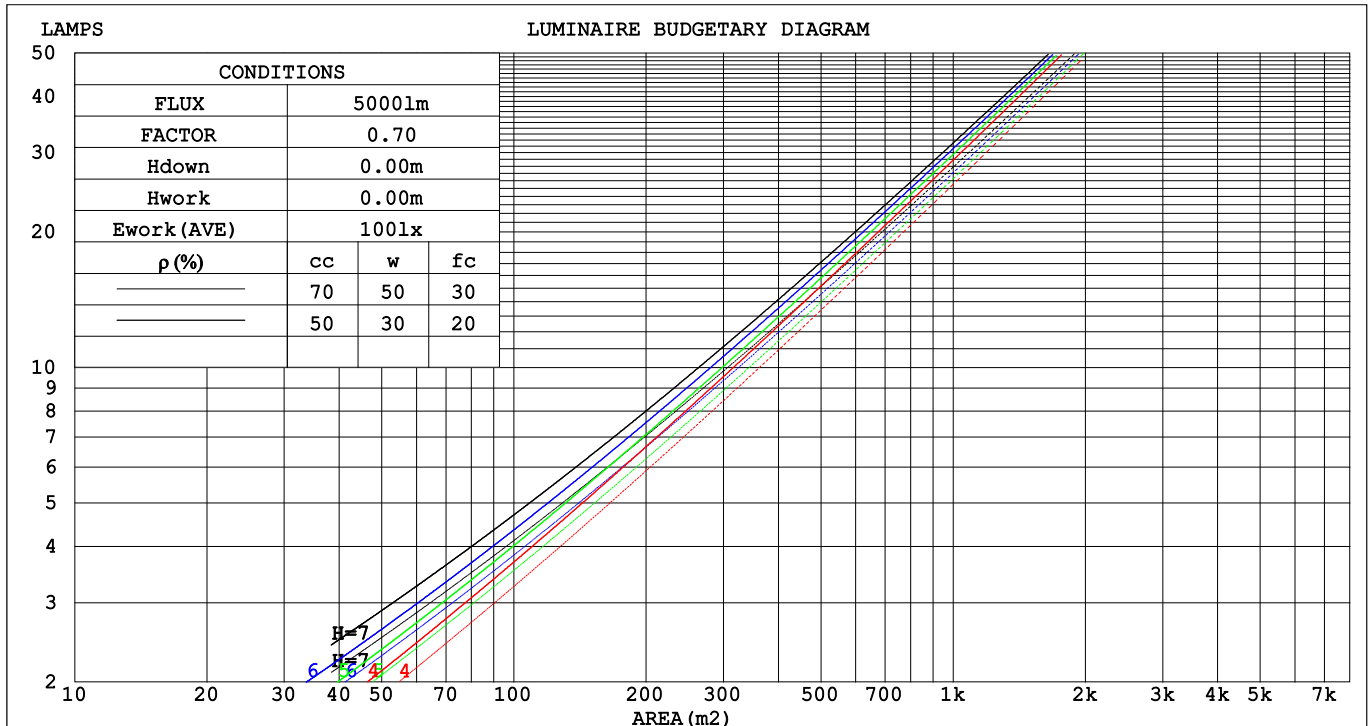

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm																	
NAME: SLDL256T-4030P-TWD09									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: Switch Lighting									SUR.:						Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.190	.108	.034	.183	.104	.033	.170	.098	.031	.159	.092	.029	.148	.086	.028	
2.0	.184	.101	.031	.178	.098	.030	.168	.093	.029	.158	.089	.028	.149	.084	.027	
3.0	.176	.094	.028	.172	.092	.028	.162	.088	.027	.154	.084	.026	.146	.081	.025	
4.0	.169	.088	.026	.164	.086	.025	.156	.083	.025	.149	.080	.024	.142	.077	.023	
5.0	.161	.082	.024	.157	.081	.023	.150	.078	.023	.144	.076	.023	.137	.073	.022	
6.0	.153	.077	.022	.150	.076	.022	.144	.074	.021	.138	.072	.021	.133	.070	.021	
7.0	.146	.072	.021	.144	.071	.020	.138	.070	.020	.133	.068	.020	.128	.066	.020	
8.0	.140	.068	.019	.137	.068	.019	.132	.066	.019	.128	.065	.019	.123	.063	.018	
9.0	.134	.065	.018	.131	.064	.018	.127	.063	.018	.123	.062	.018	.119	.060	.017	
10.0	.128	.061	.017	.126	.061	.017	.122	.060	.017	.118	.059	.017	.114	.058	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.126	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.137	.099	.070	.118	.086	.061	.081	.060	.043	.047	.035	.025	.015	.011	.008	
5.0	.129	.088	.058	.111	.076	.050	.076	.053	.035	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.048	.105	.068	.042	.072	.048	.029	.042	.028	.018	.014	.009	.006	
7.0	.116	.071	.040	.099	.062	.035	.069	.043	.025	.040	.026	.015	.013	.008	.005	
8.0	.110	.065	.035	.095	.057	.030	.066	.040	.021	.038	.023	.013	.012	.008	.004	
9.0	.105	.060	.030	.090	.052	.026	.063	.037	.019	.037	.022	.011	.012	.007	.004	
10.0	.100	.056	.026	.087	.049	.023	.060	.034	.016	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm											
NAME: SLDL256T-4030P-TWD09					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Switch Lighting					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	25.6	26.7	25.8	26.8	27.0	34.2	35.3	34.5	35.5	35.6
	3H	25.4	26.4	25.7	26.6	26.8	34.1	35.0	34.3	35.2	35.4
	4H	25.3	26.2	25.6	26.5	26.7	34.0	34.9	34.2	35.1	35.3
	6H	25.3	26.1	25.6	26.3	26.6	33.9	34.7	34.2	35.0	35.2
	8H	25.2	26.0	25.5	26.3	26.5	33.8	34.6	34.1	34.9	35.2
	12H	25.2	25.9	25.5	26.2	26.5	33.8	34.6	34.1	34.8	35.1
4H	2H	25.6	26.5	25.8	26.7	26.9	34.0	34.9	34.2	35.1	35.3
	3H	25.4	26.1	25.7	26.4	26.7	33.8	34.6	34.1	34.8	35.1
	4H	25.3	26.0	25.6	26.3	26.6	33.7	34.4	34.0	34.7	35.0
	6H	25.2	25.8	25.6	26.1	26.5	33.6	34.2	34.0	34.5	34.9
	8H	25.1	25.7	25.5	26.1	26.4	33.5	34.1	33.9	34.5	34.8
	12H	25.1	25.6	25.5	26.0	26.4	33.5	34.0	33.9	34.4	34.8
8H	4H	25.1	25.7	25.5	26.1	26.4	33.5	34.1	33.9	34.5	34.8
	6H	25.0	25.5	25.5	25.9	26.3	33.5	33.9	33.9	34.3	34.7
	8H	25.0	25.4	25.4	25.8	26.2	33.4	33.8	33.8	34.2	34.7
	12H	24.9	25.3	25.4	25.7	26.2	33.3	33.7	33.8	34.1	34.6
12H	4H	25.1	25.6	25.5	26.0	26.4	33.5	34.0	33.9	34.4	34.8
	6H	25.0	25.4	25.4	25.8	26.2	33.4	33.8	33.8	34.2	34.7
	8H	24.9	25.3	25.4	25.7	26.2	33.3	33.7	33.8	34.1	34.6
Variations with the observer position at spacings:											
S = 1.0H		+ 3.3 / -17.6					+ 3.2 / - 8.4				
1.5H		+ 4.9 / -14.6					+ 3.4 / - 9.3				
2.0H		+ 6.4 / -15.2					+ 6.5 / -17.1				

CIE Pub.117, 365.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.5)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	73	69	80	73	69	79	73	68	64
0.80	89	82	78	89	82	78	87	81	77	73
1.00	95	89	84	94	88	84	93	88	84	79
1.25	100	94	90	99	94	90	97	92	89	84
1.50	103	98	94	102	97	94	100	96	92	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	104	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	111	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

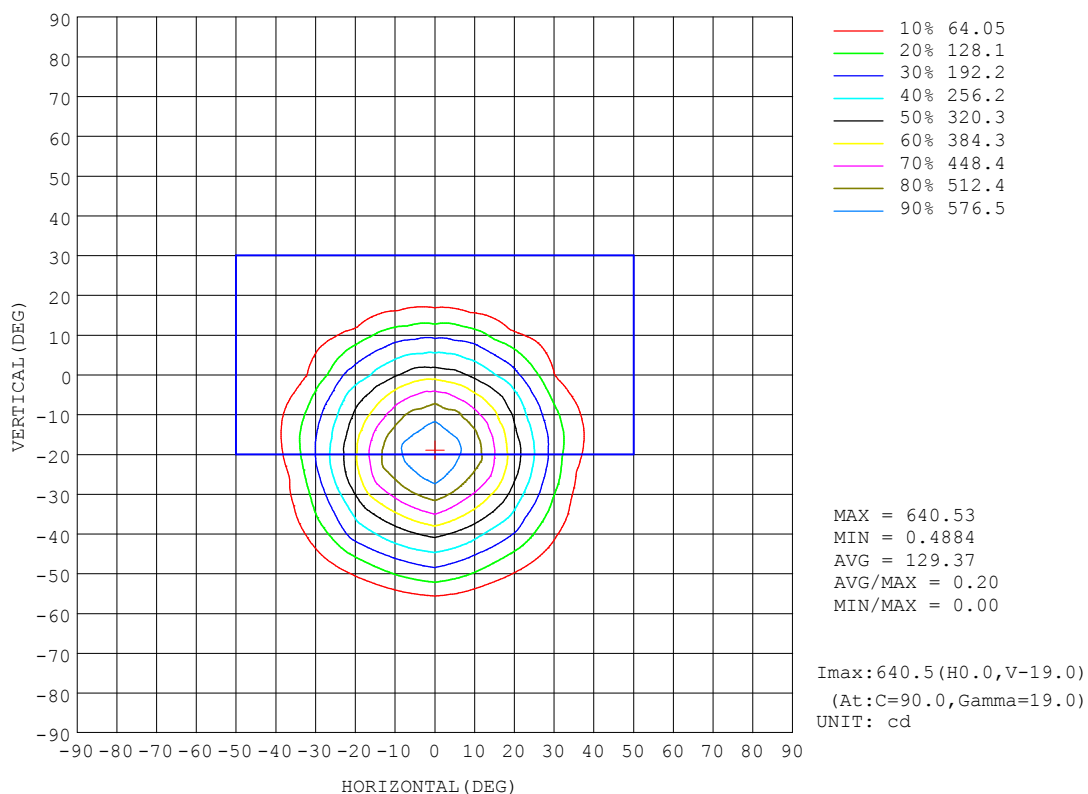


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_v1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

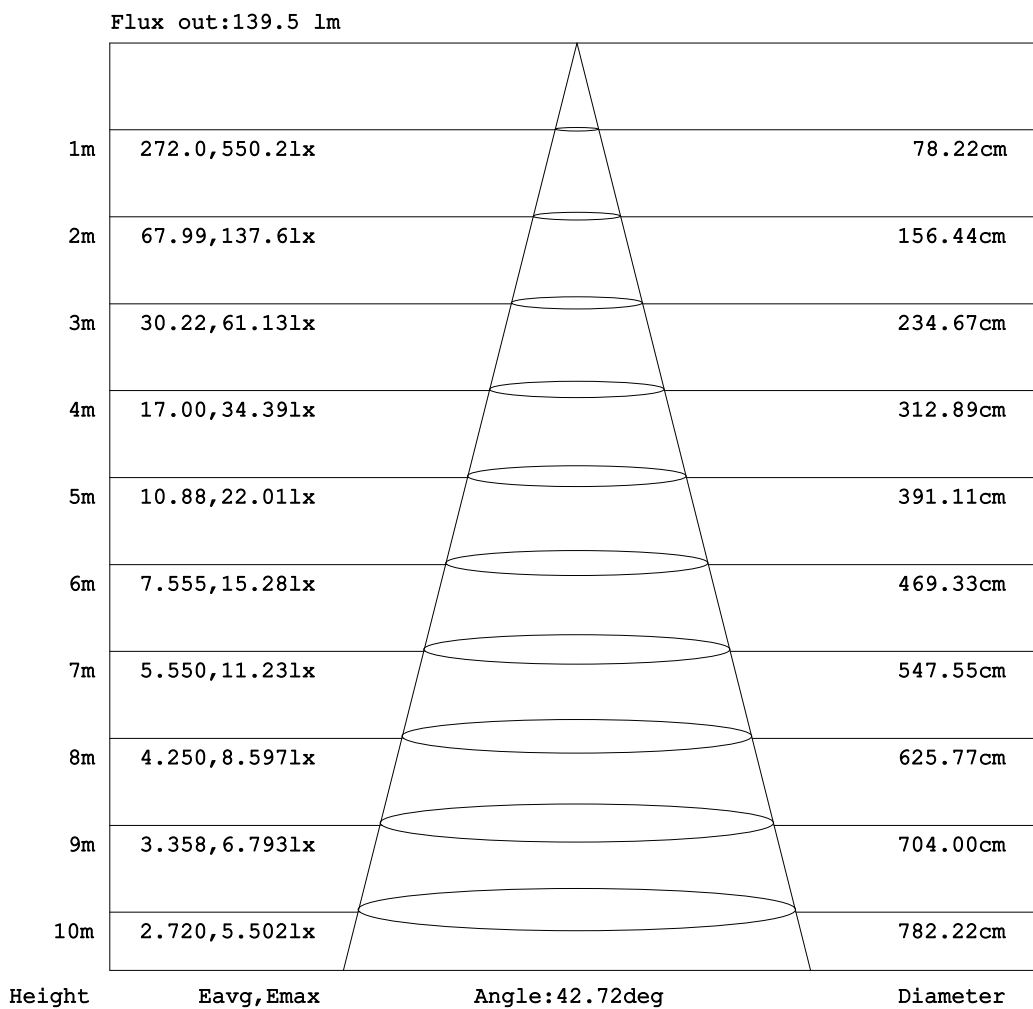


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:

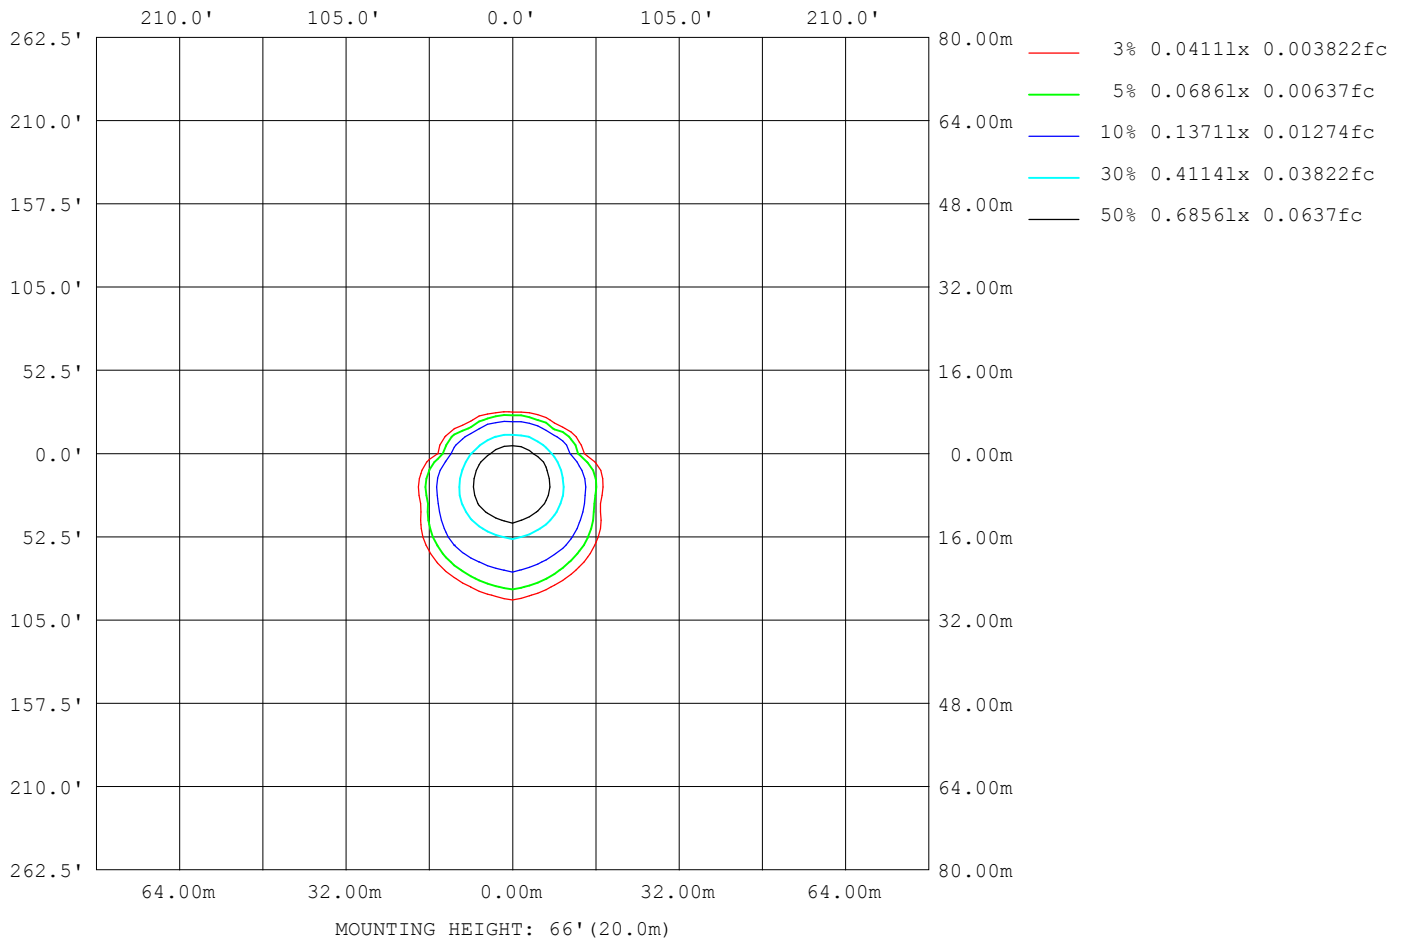

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.00V I:0.0290A P:6.4000W PF:0.9570 Freq:50.00Hz Lamp Flux:365.602x1 lm		
NAME: SLDL256T-4030P-TWD09	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Switch Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	451
L_0~180 (75) av	367
L_0~180 (85) av	300
L_90~270 (65) av	6244
L_90~270 (75) av	498
L_90~270 (85) av	549
L_45 (65) av	1818
L_45 (75) av	421
L_45 (85) av	419

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:28 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

Planar Illuminance Curve

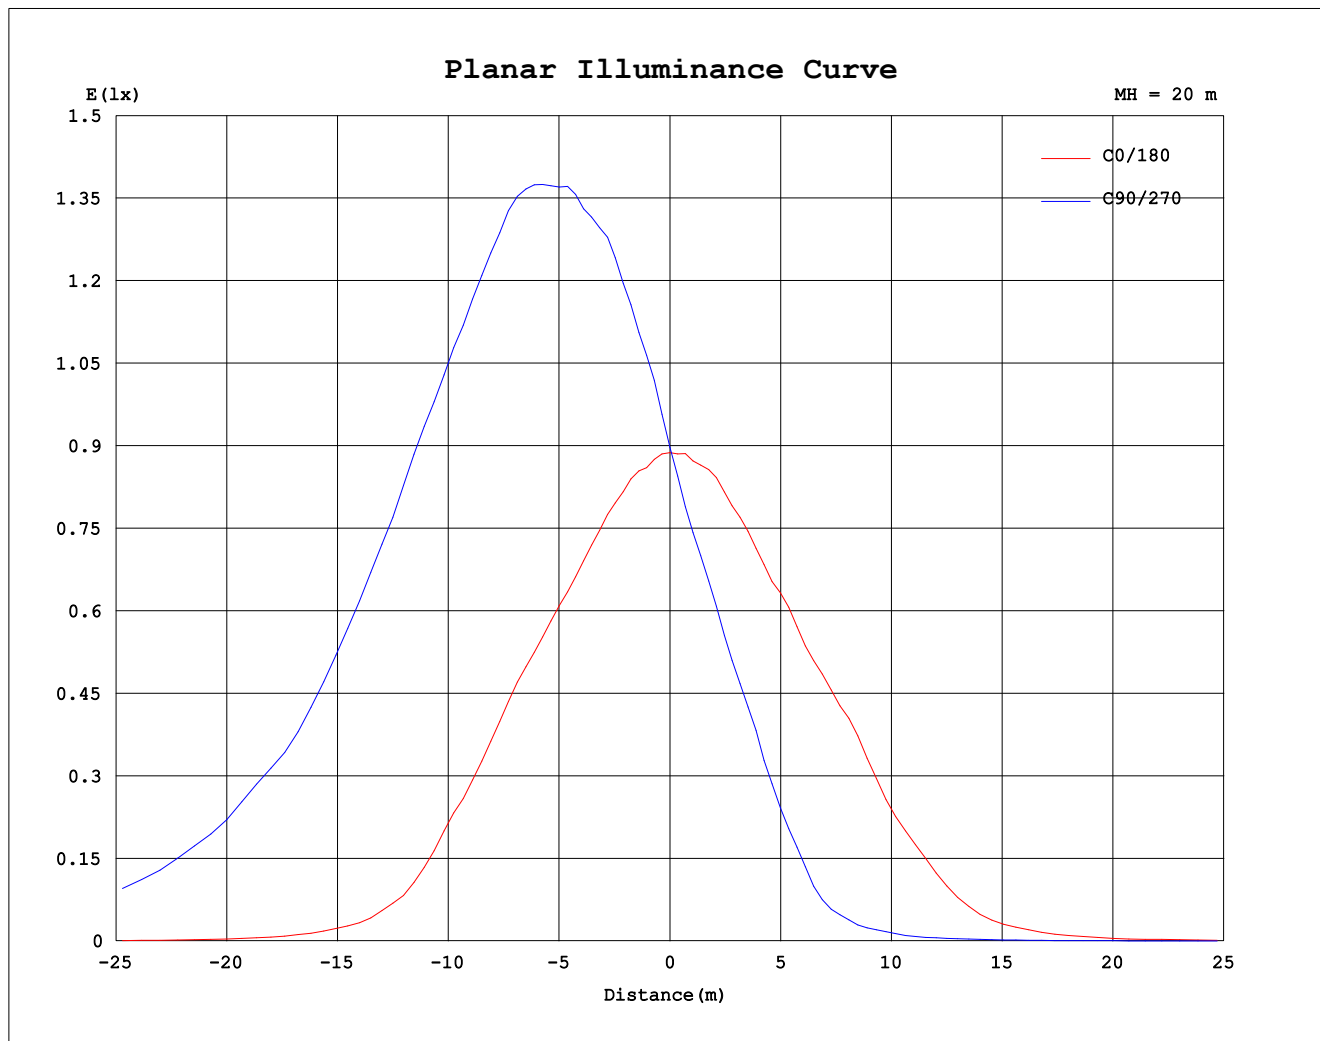

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 28 July 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-i300_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-i300_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks:

```