

SLED

by Switch Lighting

DOME




SLED315T
Beam 110°
Wide angle lighting



SLED DOME Tilt

Lighting excellence for every space

- + switchable CCT
- + CRI 90
- + dimming driver
- + pure convex diffusion
- + trim matches ZELA range
- + IP44 front
- + constant current

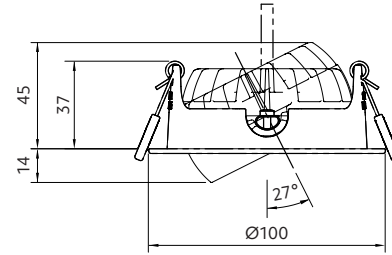

Options

Beam angle



110°

Switchable CCT



2700K 3000K 4000K

Diffuser

Opaque

CRI

Professional series (P) CRI 90

Trim colour



Textured White
RAL 9016

Textured Black
B104

Driver

Phase cut dimming included



9-36VDC input options available
Scan the QR code for low voltage driver options

Product information

CCT (K)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
2700	10	665	ICF	IC4	✓
3000	10	710	ICF	IC4	✓
4000	10	740	ICF	IC4	✓



Size
100x45mm



Cut-out
Ø86-89mm



Hole depth
>45mm



IP44
Front



Tilt Angle
27°

*Please note: lumens are for the white version. Lumens for the black are reduced.

How to specify SLED315T

e.g. code = **SLED315T-W1S1P-TW**

Model	Beam	Switchable CCT	CRI	Trim Colour	Market
SLED315T = Tilt opaque	W1 = 110° convex	S1 = 2700K 3000K 4000K	P = 90	TW = Textured White TB = Textured Black	<ul style="list-style-type: none"> ■ = NZ 1 = Aust 2 = UK 3 = EU

Please see www.switch-lighting.co.nz for specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
5 Years

L70 (60,000h)

